© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–1. If $\theta = 30°$ and $T = 6$ kN, determine the magnitude of the resultant force acting on the eyebolt and its direction measured clockwise from the positive x axis.



The parallelogram law of addition and the triangular rule are shown in Figs. *a* and *b*, respectively.

Applying the law of cosines to Fig. *b*,

$$F_R = \sqrt{6^2 + 8^2 - 2(6)(8)\cos 75°}$$
$$= 8.669\text{ kN} = 8.67\text{ kN} \qquad \textbf{Ans.}$$

Applying the law of sines to Fig. *b* and using this result , yields

$$\frac{\sin\alpha}{8} = \frac{\sin 75°}{8.669} \qquad \alpha = 63.05°$$

Thus, the direction angle ϕ of $\mathbf{F}_R$ measured clockwise from the positive x axis is

$$\phi = \alpha - 60° = 63.05° - 60° = 3.05° \qquad \textbf{Ans.}$$

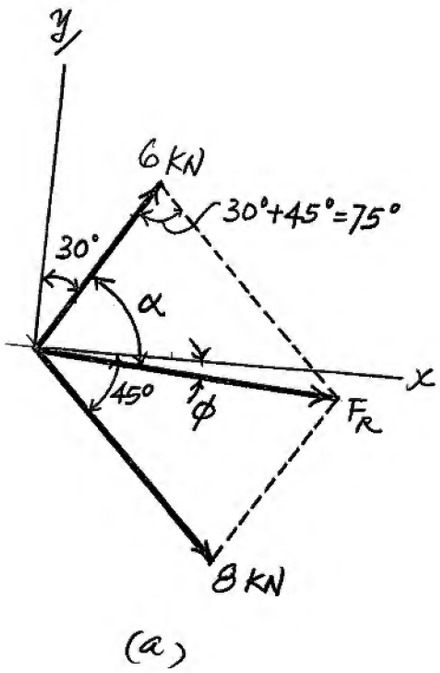



© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–2. If $\theta = 60°$ and $T = 5$ kN, determine the magnitude of the resultant force acting on the eyebolt and its direction measured clockwise from the positive x axis.



The parallelogram law of addition and the triangular rule are shown in Figs. *a* and *b*, respectively.

Applying the law of cosines to Fig. *b*,

$$F_R = \sqrt{5^2 + 8^2 - 2(5)(8)\cos 105°}$$
$$= 10.47 \text{ kN} = 10.5 \text{ kN} \qquad \textbf{Ans.}$$

Applying the law of sines to Fig. *b* and using this result, yields

$$\frac{\sin\alpha}{8} = \frac{\sin 105°}{10.47} \qquad \alpha = 47.54°$$

Thus, the direction angle ϕ of $\mathbf{F}_R$ measured clockwise from the positive x axis is

$$\phi = \alpha - 30° = 47.54° - 30° = 17.5° \qquad \textbf{Ans.}$$

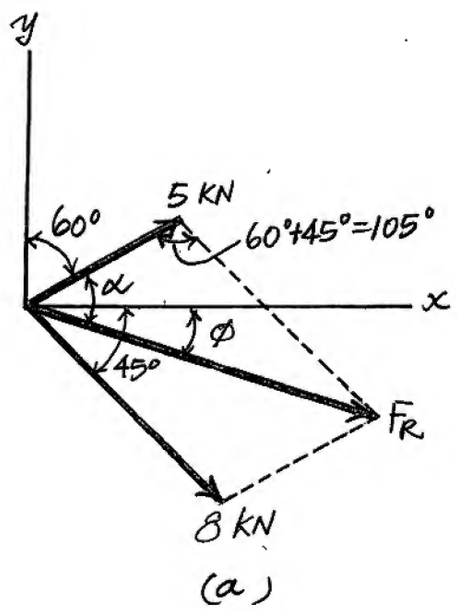

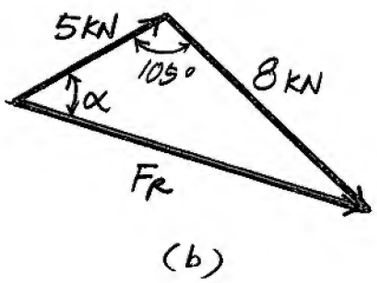

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–3. If the magnitude of the resultant force is to be 9 kN directed along the positive x axis, determine the magnitude of force **T** acting on the eyebolt and its angle θ.



The parallelogram law of addition and the triangular rule are shown in Figs. *a* and *b*, respectively.

Applying the law of cosines to Fig. *b*,

$$T = \sqrt{8^2 + 9^2 - 2(8)(9)\cos 45°}$$

$$= 6.571 \text{ kN} = 6.57 \text{ kN}$$ **Ans.**

Applying the law of sines to Fig. *b* and using this result, yields

$$\frac{\sin(90° - \theta)}{8} = \frac{\sin 45°}{6.571}$$

$$\theta = 30.6°$$ **Ans.**

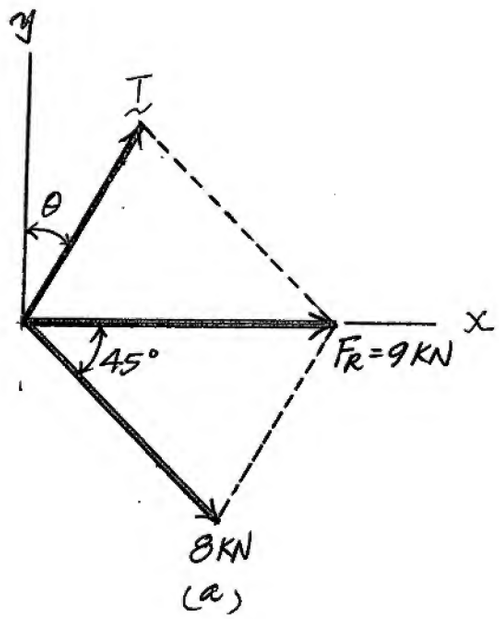



© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***2–4.** Determine the magnitude of the resultant force acting on the bracket and its direction measured counterclockwise from the positive u axis.

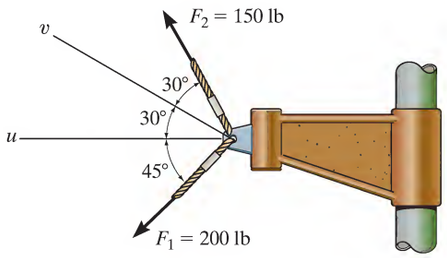

The parallelogram law of addition and the triangular rule are shown in Figs. a and b, respectively.

Applying the law of cosines to Fig. b,

$$F_R = \sqrt{200^2 + 150^2 - 2(200)(150)\cos 75°}$$
$$= 216.72 \text{ lb} = 217 \text{ lb} \qquad \textbf{Ans.}$$

Applying the law of sines to Fig. b and using this result yields

$$\frac{\sin\alpha}{200} = \frac{\sin 75°}{216.72} \qquad \alpha = 63.05°$$

Thus, the direction angle ϕ of $\mathbf{F}_R$, measured counterclockwise from the positive u axis, is

$$\phi = \alpha - 60° = 63.05° - 60° = 3.05° \qquad \textbf{Ans.}$$

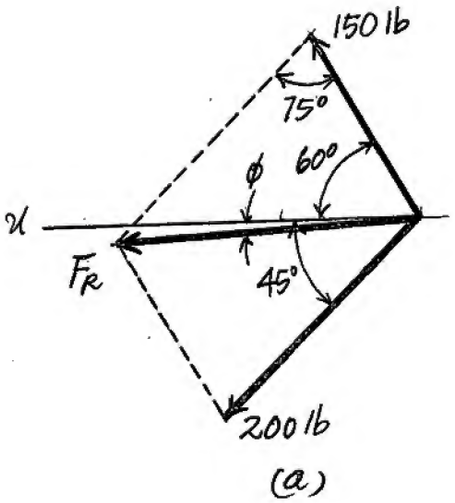

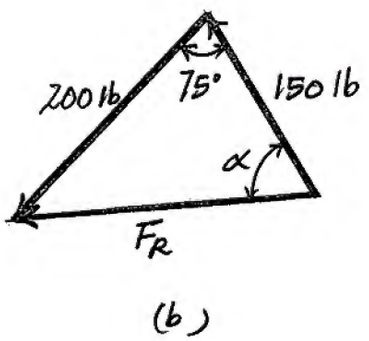

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–5. Resolve $\mathbf{F}_1$ into components along the u and v axes, and determine the magnitudes of these components.

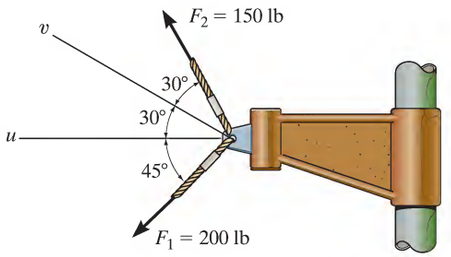

The parallelogram law of addition and the triangular rule are shown in Figs. *a* and *b*, respectively.

Applying the law of sines to Fig. *b*, yields

$$\frac{F_u}{\sin 105°} = \frac{200}{\sin 30°} \qquad F_u = 386 \text{ lb} \qquad \textbf{Ans.}$$

$$\frac{F_v}{\sin 45°} = \frac{200}{\sin 30°} \qquad F_v = 283 \text{ lb} \qquad \textbf{Ans.}$$

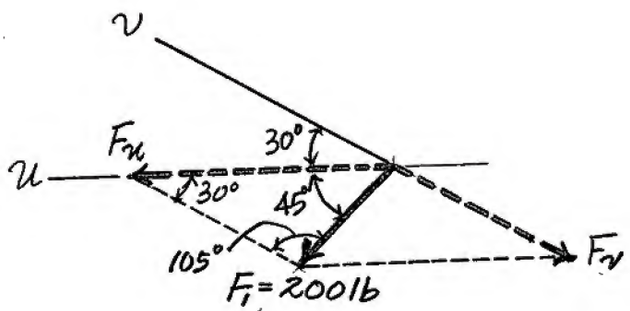

(a)

(b)

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–6. Resolve $\mathbf{F}_2$ into components along the u and v axes, and determine the magnitudes of these components.

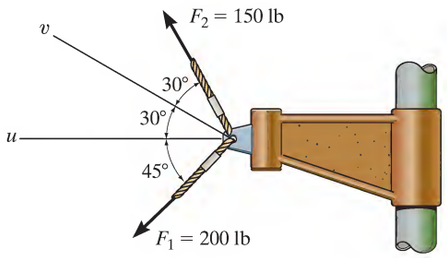

The parallelogram law of addition and the triangular rule are shown in Figs. *a* and *b*, respectively.

Applying the law of sines to Fig. *b*,

$$\frac{F_u}{\sin 30^\circ} = \frac{150}{\sin 30^\circ} \qquad F_u = 150 \text{ lb} \qquad \textbf{Ans.}$$

$$\frac{F_v}{\sin 120^\circ} = \frac{150}{\sin 30^\circ} \qquad F_v = 260 \text{ lb} \qquad \textbf{Ans.}$$

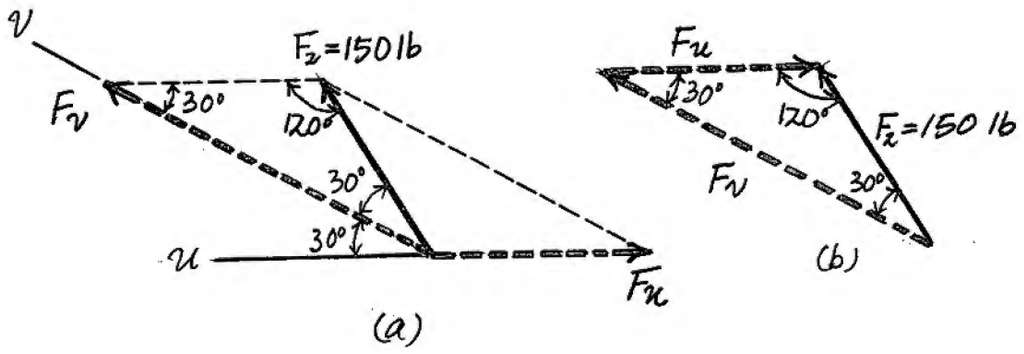

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–7. If $F_B = 2$ kN and the resultant force acts along the positive u axis, determine the magnitude of the resultant force and the angle θ.

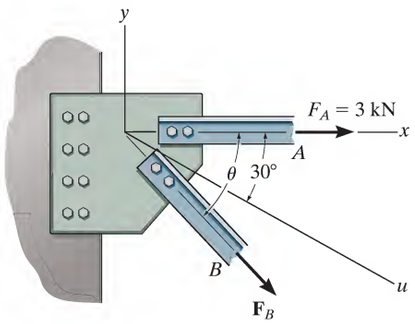

The parallelogram law of addition and the triangular rule are shown in Figs. *a* and *b*, respectively.

Applying the law of sines to Fig. *b*, yields

$$\frac{\sin\phi}{3} = \frac{\sin 30°}{2} \qquad \phi = 48.59°$$

Thus,

$$\theta = 30° + \phi = 30° + 48.59° = 78.59° = 78.6° \qquad \textbf{Ans.}$$

With the result $\theta = 78.59°$, applying the law of sines to Fig. *b* again, yields

$$\frac{F_R}{\sin(180° - 78.59°)} = \frac{2}{\sin 30°} \qquad F_R = 3.92 \text{ kN} \qquad \textbf{Ans.}$$



(a)



(b)

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***2–8.** If the resultant force is required to act along the positive u axis and have a magnitude of 5 kN, determine the required magnitude of $\mathbf{F}_B$ and its direction θ.

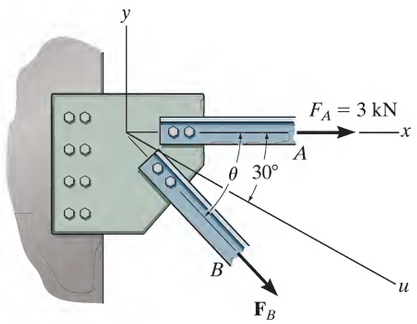

The parallelogram law of addition and the triangular rule are shown in Figs. *a* and *b*, respectively.

Applying the law of cosines to Fig. *b*,

$$F_B = \sqrt{3^2 + 5^2 - 2(3)(5)\cos 30°}$$
$$= 2.832\ \text{kN} = 2.83\ \text{kN} \qquad \textbf{Ans.}$$

Using this result and realizing that $\sin(180° - \theta) = \sin\theta$, the application of the sine law to Fig. *b*, yields

$$\frac{\sin\theta}{5} = \frac{\sin 30°}{2.832} \qquad \theta = 62.0° \qquad \textbf{Ans.}$$

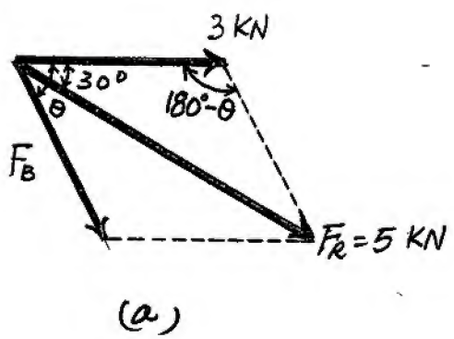

(a)



(b)

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–9. The plate is subjected to the two forces at A and B as shown. If $\theta = 60°$, determine the magnitude of the resultant of these two forces and its direction measured clockwise from the horizontal.

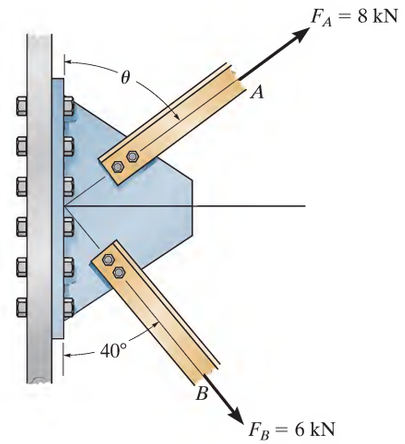

Parallelogram Law : The parallelogram law of addition is shown in Fig. (a).

Trigonometry : Using law of cosines [Fig. (b)], we have

$$F_R = \sqrt{8^2 + 6^2 - 2(8)(6)\cos 100°}$$
$$= 10.80 \text{ kN} = 10.8 \text{ kN} \quad \textbf{Ans}$$

The angle θ can be determined using law of sines [Fig. (b)].

$$\frac{\sin\theta}{6} = \frac{\sin 100°}{10.80}$$
$$\sin\theta = 0.5470$$
$$\theta = 33.16°$$

Thus, the direction ϕ of F_R measured from the x axis is

$$\phi = 33.16° - 30° = 3.16° \quad \textbf{Ans}$$

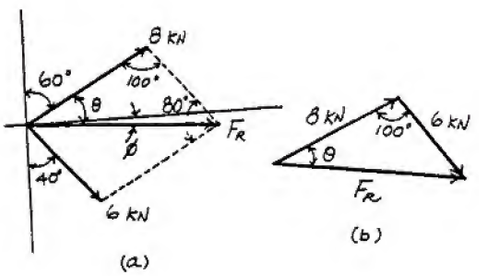

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–10. Determine the angle of θ for connecting member A to the plate so that the resultant force of $\mathbf{F}_A$ and $\mathbf{F}_B$ is directed horizontally to the right. Also, what is the magnitude of the resultant force?

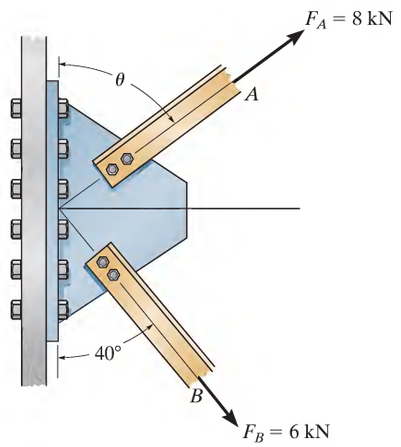

Parallelogram Law : The parallelogram law of addition is shown in Fig. (a).

Trigonometry : Using law of sines [Fig. (b)], we have

$$\frac{\sin(90° - \theta)}{6} = \frac{\sin 50°}{8}$$

$$\sin(90° - \theta) = 0.5745$$

$$\theta = 54.93° = 54.9° \qquad \textbf{Ans}$$

From the triangle, $\phi = 180° - (90° - 54.93°) - 50° = 94.93°$. Thus, using law of cosines, the magnitude of $\mathbf{F}_R$ is

$$F_R = \sqrt{8^2 + 6^2 - 2(8)(6)\cos 94.93°}$$

$$= 10.4 \text{ kN} \qquad \textbf{Ans}$$





2–11. If the tension in the cable is 400 N, determine the magnitude and direction of the resultant force acting on the pulley. This angle is the same angle θ of line AB on the tailboard block.

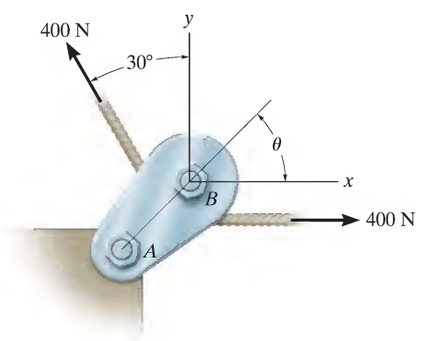

$$F_R = \sqrt{(400)^2 + (400)^2 - 2(400)(400)\cos 60°} = 400 \text{ N} \qquad \textbf{Ans}$$

$$\frac{\sin\theta}{400} = \frac{\sin 60°}{400}; \quad \theta = 60° \qquad \textbf{Ans}$$





© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***2–12.** The device is used for surgical replacement of the knee joint. If the force acting along the leg is 360 N, determine its components along the x and y' axes.

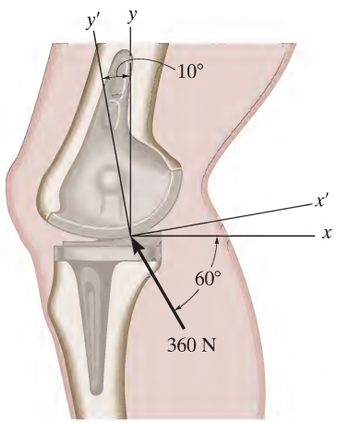

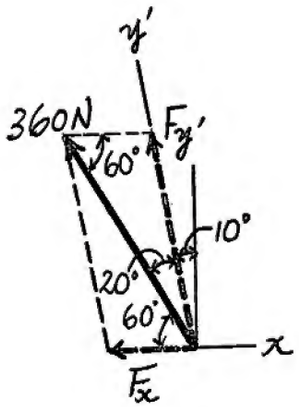

(a)

$$\frac{-F_x}{\sin 20^\circ} = \frac{360}{\sin 100^\circ}; \quad F_x = -125\ \text{N} \quad \text{Ans}$$

$$\frac{F_{y'}}{\sin 60^\circ} = \frac{360}{\sin 100^\circ}; \quad F_{y'} = 317\ \text{N} \quad \text{Ans}$$



(b)

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–13. The device is used for surgical replacement of the knee joint. If the force acting along the leg is 360 N, determine its components along the x' and y axes.

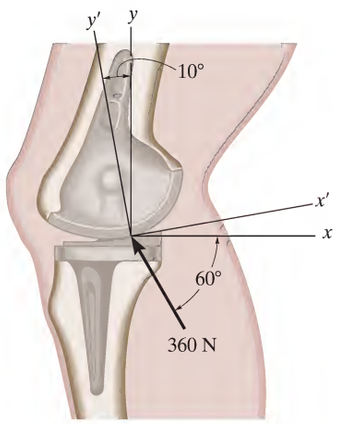

$$\frac{-F_{x'}}{\sin 30^\circ} = \frac{360}{\sin 80^\circ}; \quad F_{x'} = -183\ \text{N} \quad \text{Ans}$$

$$\frac{F_y}{\sin 70^\circ} = \frac{360}{\sin 80^\circ}; \quad F_y = 344\ \text{N} \quad \text{Ans}$$

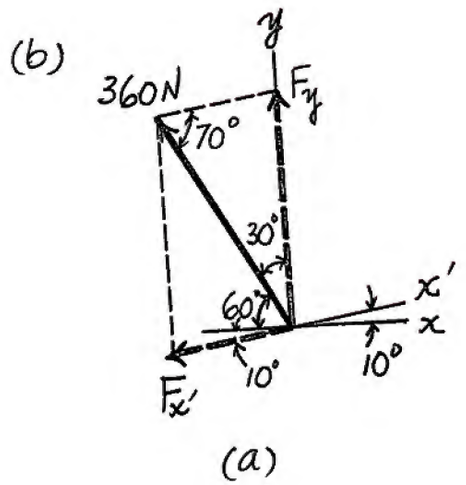



© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–14. Determine the design angle θ ($0° \le \theta \le 90°$) for strut AB so that the 400-lb horizontal force has a component of 500 lb directed from A towards C. What is the component of force acting along member AB? Take $\phi = 40°$.

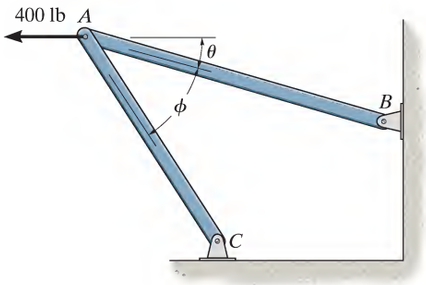

Parallelogram Law : The parallelogram law of addition is shown in Fig. (a).

Trigonometry : Using law of sines [Fig. (b)], we have

$$\frac{\sin\theta}{500} = \frac{\sin 40°}{400}$$
$$\sin\theta = 0.8035$$

$$\theta = 53.46° = 53.5° \qquad \text{Ans}$$

Thus, $\psi = 180° - 40° - 53.46° = 86.54°$

Using law of sines [Fig. (b)]

$$\frac{F_{AB}}{\sin 86.54°} = \frac{400}{\sin 40°}$$

$$F_{AB} = 621 \text{ lb} \qquad \text{Ans}$$

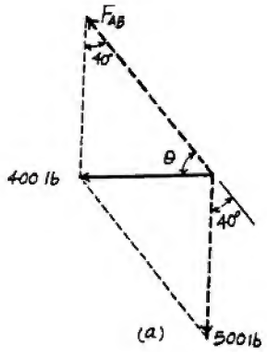



2–15. Determine the design angle ϕ ($0° \le \phi \le 90°$) between struts AB and AC so that the 400-lb horizontal force has a component of 600 lb which acts up to the left, in the same direction as from B towards A. Take $\theta = 30°$.

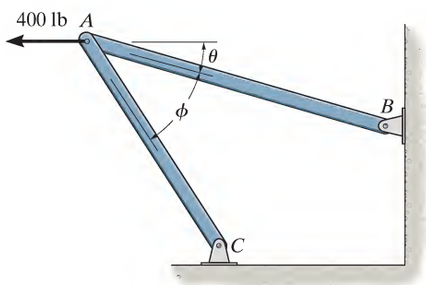

Parallelogram Law : The parallelogram law of addition is shown in Fig. (a).

Trigonometry : Using law of cosines [Fig. (b)], we have

$$F_{AC} = \sqrt{400^2 + 600^2 - 2(400)(600)\cos 30°} = 322.97 \text{ lb}$$

The angle ϕ can be determined using law of sines [Fig. (b)].

$$\frac{\sin\phi}{400} = \frac{\sin 30°}{322.97}$$
$$\sin\phi = 0.6193$$

$$\phi = 38.3° \qquad \text{Ans}$$





© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***2–16.** Resolve $\mathbf{F}_1$ into components along the u and v axes and determine the magnitudes of these components.

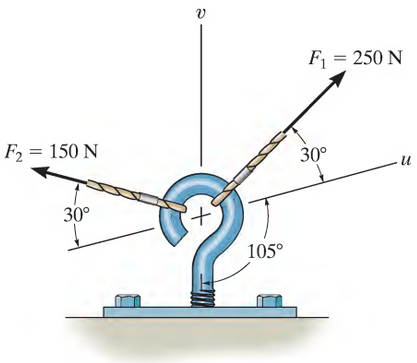





Sine law:

$$\frac{F_{1v}}{\sin 30^\circ} = \frac{250}{\sin 105^\circ} \qquad F_{1v} = 129\ \text{N} \qquad \text{Ans}$$

$$\frac{F_{1u}}{\sin 45^\circ} = \frac{250}{\sin 105^\circ} \qquad F_{1u} = 183\ \text{N} \qquad \text{Ans}$$

•2–17. Resolve $\mathbf{F}_2$ into components along the u and v axes and determine the magnitudes of these components.

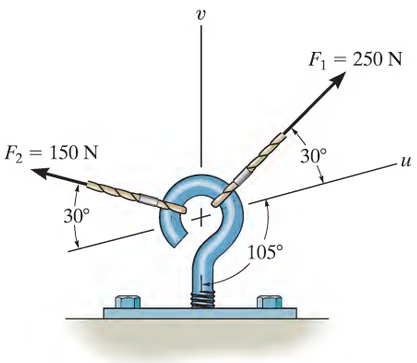

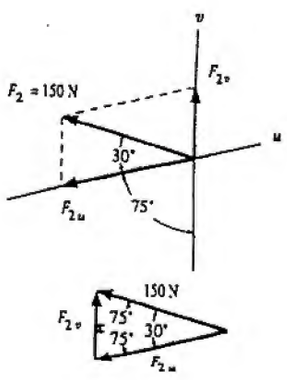

Sine law:

$$\frac{F_{2v}}{\sin 30^\circ} = \frac{150}{\sin 75^\circ} \qquad F_{2v} = 77.6\ \text{N} \qquad \text{Ans}$$

$$\frac{F_{2u}}{\sin 75^\circ} = \frac{150}{\sin 75^\circ} \qquad F_{2u} = 150\ \text{N} \qquad \text{Ans}$$

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–18. The truck is to be towed using two ropes. Determine the magnitudes of forces $\mathbf{F}_A$ and $\mathbf{F}_B$ acting on each rope in order to develop a resultant force of 950 N directed along the positive x axis. Set $\theta = 50°$.

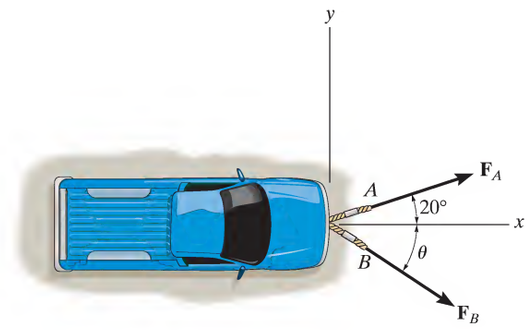

Parallelogram Law : The parallelogram law of addition is shown in Fig. (a).

Trigonometry : Using law of sines [Fig. (b)], we have

$$\frac{F_A}{\sin 50°} = \frac{950}{\sin 110°}$$

$$F_A = 774 \text{ N} \qquad \text{Ans}$$

$$\frac{F_B}{\sin 20°} = \frac{950}{\sin 110°}$$

$$F_B = 346 \text{ N} \qquad \text{Ans}$$



(a)



(b)

2–19. The truck is to be towed using two ropes. If the resultant force is to be 950 N, directed along the positive x axis, determine the magnitudes of forces $\mathbf{F}_A$ and $\mathbf{F}_B$ acting on each rope and the angle θ of $\mathbf{F}_B$ so that the magnitude of $\mathbf{F}_B$ is a *minimum*. $\mathbf{F}_A$ acts at 20° from the x axis as shown.

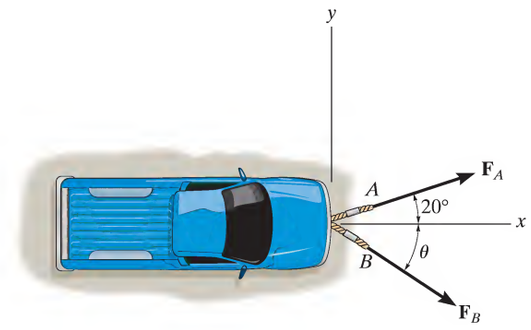

Parallelogram Law : In order to produce a *minimum* force $\mathbf{F}_B$, $\mathbf{F}_B$ has to act perpendicular to $\mathbf{F}_A$. The parallelogram law of addition is shown in Fig. (a).

Trigonometry : Fig. (b).

$$F_B = 950\sin 20° = 325 \text{ N} \qquad \text{Ans}$$

$$F_A = 950\cos 20° = 893 \text{ N} \qquad \text{Ans}$$

The angle θ is

$$\theta = 90° - 20° = 70.0° \qquad \text{Ans}$$



(a)



(b)

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***2–20.** If $\phi = 45°$, $F_1 = 5$ kN, and the resultant force is 6 kN directed along the positive y axis, determine the required magnitude of $\mathbf{F}_2$ and its direction θ.

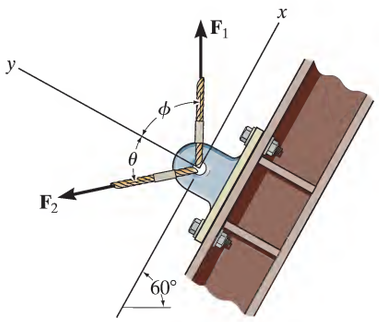

The parallelogram law of addition and triangular rule are shown in Figs. *a* and *b*, respectively.

Applying the law of cosines to Fig. *b*,

$$F_2 = \sqrt{6^2 + 5^2 - 2(6)(5)\cos 45°}$$
$$= 4.310\ \text{kN} = 4.31\ \text{kN} \qquad \textbf{Ans.}$$

Using this result and applying the law of sines to Fig. *b*, yields

$$\frac{\sin\theta}{5} = \frac{\sin 45°}{4.310} \qquad \theta = 55.1° \quad \textbf{Ans.}$$

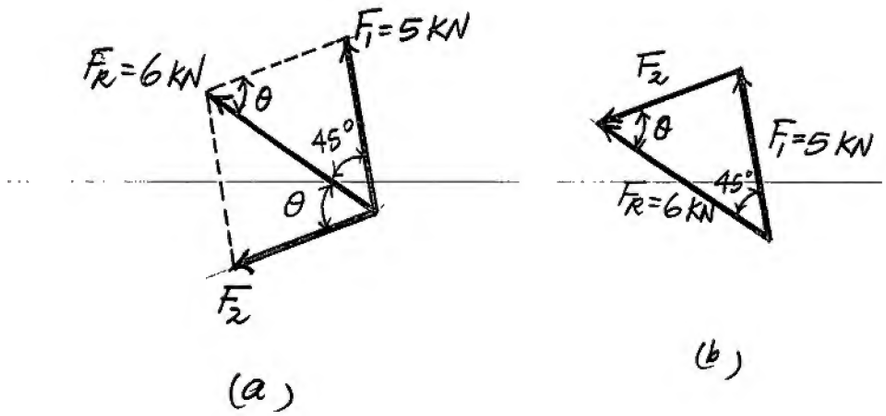

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–21. If $\phi = 30°$ and the resultant force is to be 6 kN directed along the positive y axis, determine the magnitudes of $\mathbf{F}_1$ and $\mathbf{F}_2$ and the angle θ if F_2 is required to be a minimum.

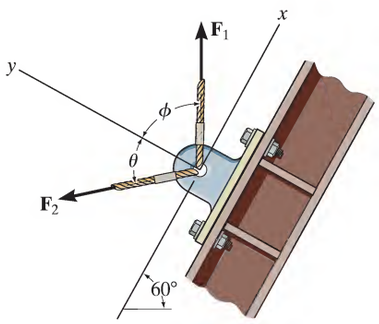

For $\mathbf{F}_2$ to be minimum, it has to be directed perpendicular to F_R.
The parallelogram law of addition and triangular rule are shown in Figs. *a* and *b*, respectively.
By applying simple trigonometry to Fig. *b*,

$$F_1 = 6\cos 30° = 5.20 \text{ kN} \quad \textbf{Ans.}$$
$$F_2 = 6\sin 30° = 3 \text{ kN} \quad \textbf{Ans.}$$

and

$$\theta = 90° - 30° = 60° \quad \textbf{Ans.}$$

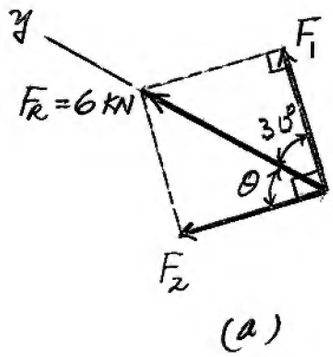

(a)



(b)

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–22. If $\phi = 30°$, $F_1 = 5$ kN, and the resultant force is to be directed along the positive y axis, determine the magnitude of the resultant force if F_2 is to be a minimum. Also, what is F_2 and the angle θ?

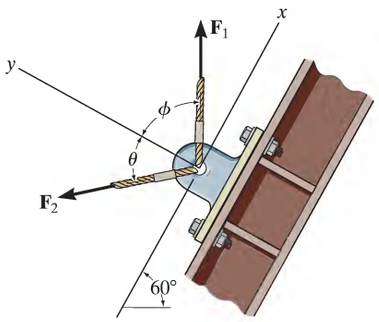

Parallelogram Law and Triangular Rule: The parallelogram law of addition and triangular rule are shown in Figs. *a* and *b*, respectively.

For $\mathbf{F}_2$ to be minimum, it must be directed perpendicular to the resultant force. Thus,

$$\theta = 90° \qquad \textbf{Ans.}$$

By applying simple trigonometry to Fig. *b*,

$$F_2 = 5 \sin 30° = 2.50 \text{ kN} \qquad \textbf{Ans.}$$
$$F_R = 5 \cos 30° = 4.33 \text{ kN} \qquad \textbf{Ans.}$$

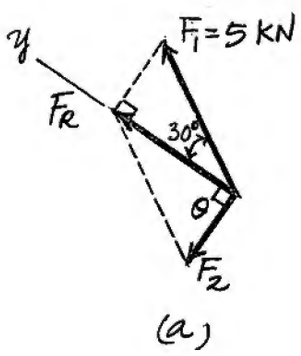

(a)



(b)

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–23. If $\theta = 30°$ and $F_2 = 6$ kN, determine the magnitude of the resultant force acting on the plate and its direction measured clockwise from the positive x axis.

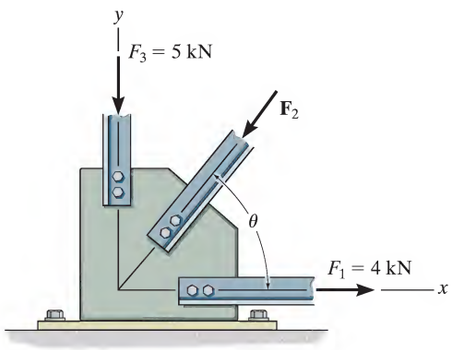

Parallelogram Law and Triangular Rule: This problem can be solved by adding the forces successively, using the parallelogram law of addition, shown in Fig. *a*. Two triangular force diagrams, shown in Figs. *b* and *c*, can be derived from the parallelogram.

Determination of Unknowns: Referring to Fig. *b*, F' and α can be determined as follows.

$$F' = \sqrt{4^2 + 5^2} = 6.403\,\text{kN}$$

$$\tan\alpha = \frac{5}{4} \qquad \alpha = 51.34°$$

Using the results for F' and α and referring to Fig. *c*, $\mathbf{F}_R$ and β can be determined.

$$F_R = \sqrt{6^2 + 6.403^2 - 2(6)(6.403)\cos(51.34° + 30°)}$$
$$= 8.089\,\text{kN} = 8.09\,\text{kN} \qquad \textbf{Ans.}$$

$$\frac{\sin\beta}{6} = \frac{\sin(51.34° + 30°)}{8.089} \qquad \beta = 47.16°$$

Thus, the direction angle ϕ of $\mathbf{F}_R$, measured clockwise from the positive x axis, is

$$\phi = \alpha + \beta = 51.34° + 47.16° = 98.5° \qquad \textbf{Ans.}$$

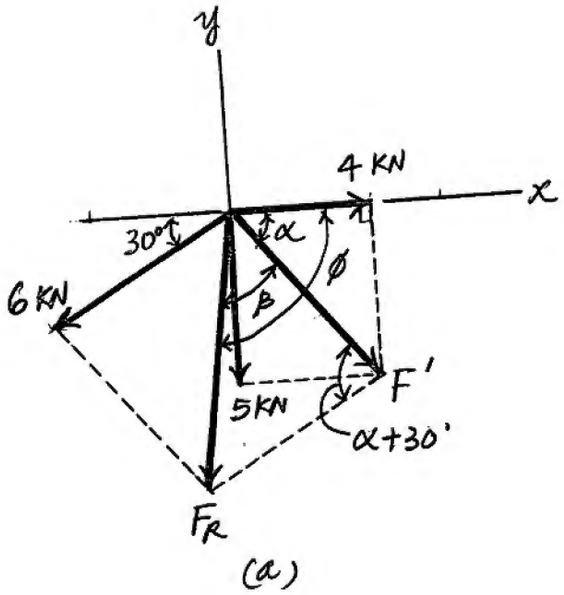



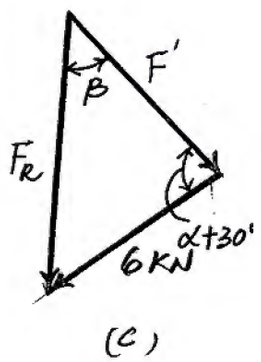

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***2–24.** If the resultant force $\mathbf{F}_R$ is directed along a line measured 75° clockwise from the positive x axis and the magnitude of $\mathbf{F}_2$ is to be a minimum, determine the magnitudes of $\mathbf{F}_R$ and $\mathbf{F}_2$ and the angle $\theta \leq 90°$.

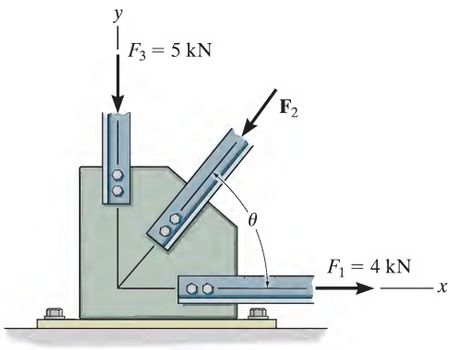

This problem can be solved by adding the forces successively, using the parallelogram law of addition, shown in Fig. *a*. Two triangular force diagrams, shown in Figs. *b* and *c*, can be derived from the parallelograms. For $\mathbf{F}_1$ to be minimum, it must be perpendicular to the resultant force' s line of action. Thus,

$$\theta = 90° - 75° = 15°$$ **Ans.**

Referring to Fig. *b*, F' and α can be determined.

$$F' = \sqrt{4^2 + 5^2} = 6.403 \text{ kN}$$

$$\tan\alpha = \frac{5}{4} \qquad \alpha = 51.34°$$

Using the results for θ, α, and F', $\mathbf{F}_R$ and $\mathbf{F}_2$ can be determined by referring to Fig. *c*.

$$F_2 = 6.403\cos(15° + 51.43°) = 2.57 \text{ kN}$$ **Ans.**

$$F_R = 6.403\sin(15° + 51.43°) = 5.86 \text{ kN}$$ **Ans.**

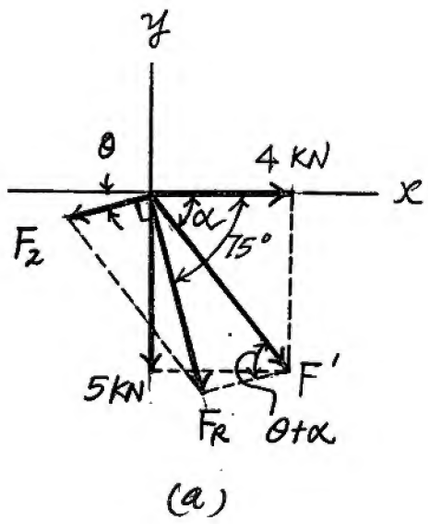





© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–25. Two forces $\mathbf{F}_1$ and $\mathbf{F}_2$ act on the screw eye. If their lines of action are at an angle θ apart and the magnitude of each force is $F_1 = F_2 = F$, determine the magnitude of the resultant force $\mathbf{F}_R$ and the angle between $\mathbf{F}_R$ and $\mathbf{F}_1$.

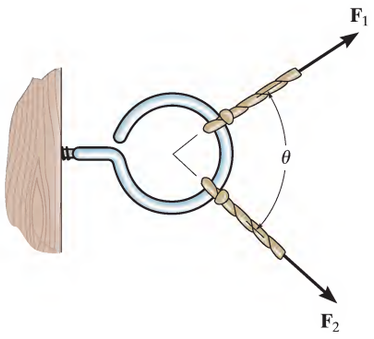

$$\frac{F}{\sin\phi} = \frac{F}{\sin(\theta-\phi)}$$

$$\sin(\theta-\phi) = \sin\phi$$

$$\theta-\phi = \phi$$

$$\phi = \frac{\theta}{2} \qquad \text{Ans}$$

$$F_R = \sqrt{(F)^2 + (F)^2 - 2(F)(F)\cos(180^\circ - \theta)}$$

Since $\cos(180^\circ - \theta) = -\cos\theta$

$$F_R = F(\sqrt{2})\sqrt{1+\cos\theta}$$

Since $\cos(\frac{\theta}{2}) = \sqrt{\frac{1+\cos\theta}{2}}$

Then

$$F_R = 2F\cos(\frac{\theta}{2}) \qquad \text{Ans}$$

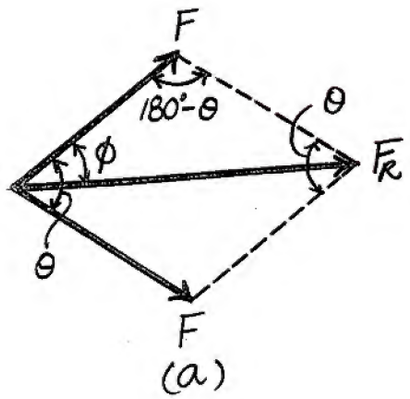

(a)

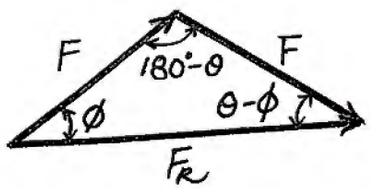

(b)

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–26. The log is being towed by two tractors A and B. Determine the magnitudes of the two towing forces $\mathbf{F}_A$ and $\mathbf{F}_B$ if it is required that the resultant force have a magnitude $F_R = 10$ kN and be directed along the x axis. Set $\theta = 15°$.

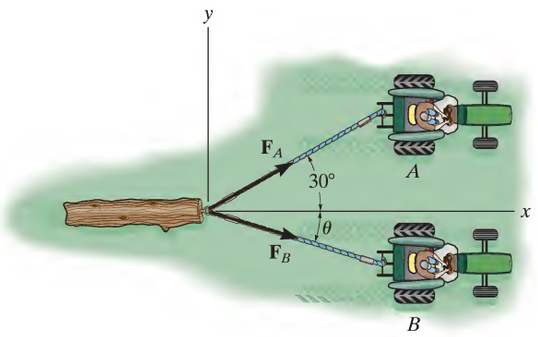

Parallelogram Law : The parallelogram law of addition is shown in Fig. (a).

Trigonometry : Using law of sines [Fig. (b)], we have

$$\frac{F_A}{\sin 15°} = \frac{10}{\sin 135°}$$

$$F_A = 3.66 \text{ kN} \qquad \textbf{Ans}$$

$$\frac{F_B}{\sin 30°} = \frac{10}{\sin 135°}$$

$$F_B = 7.07 \text{ kN} \qquad \textbf{Ans}$$





2–27. The resultant $\mathbf{F}_R$ of the two forces acting on the log is to be directed along the positive x axis and have a magnitude of 10 kN, determine the angle θ of the cable, attached to B such that the magnitude of force $\mathbf{F}_B$ in this cable is a minimum. What is the magnitude of the force in each cable for this situation?

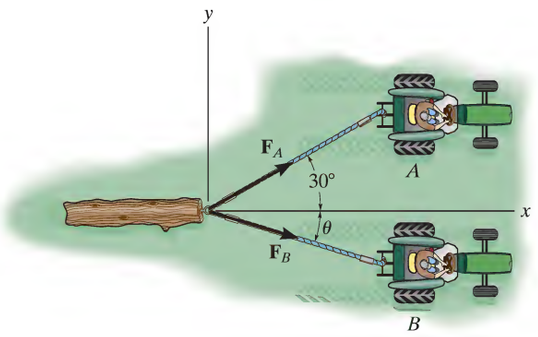

Parallelogram Law : In order to produce a *minimum* force $\mathbf{F}_B$, $\mathbf{F}_B$ has to act perpendicular to $\mathbf{F}_A$. The parallelogram law of addition is shown in Fig. (a).

Trigonometry : Fig. (b).

$$F_B = 10\sin 30° = 5.00 \text{ kN} \qquad \textbf{Ans}$$

$$F_A = 10\cos 30° = 8.66 \text{ kN} \qquad \textbf{Ans}$$

The angle θ is

$$\theta = 90° - 30° = 60.0° \qquad \textbf{Ans}$$





© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***2–28.** The beam is to be hoisted using two chains. Determine the magnitudes of forces $\mathbf{F}_A$ and $\mathbf{F}_B$ acting on each chain in order to develop a resultant force of 600 N directed along the positive y axis. Set $\theta = 45°$.

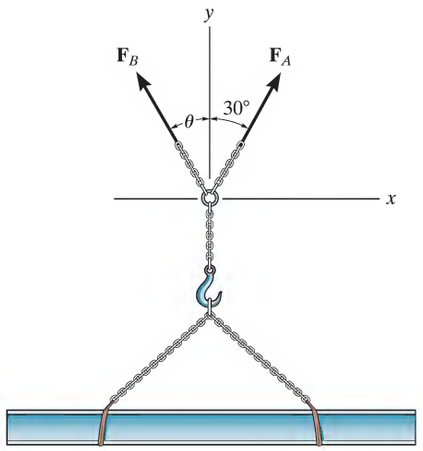

$$\frac{F_A}{\sin 45°} = \frac{600}{\sin 105°}; \quad F_A = 439\ \text{N} \quad \text{Ans}$$

$$\frac{F_B}{\sin 30°} = \frac{600}{\sin 105°}; \quad F_B = 311\ \text{N} \quad \text{Ans}$$

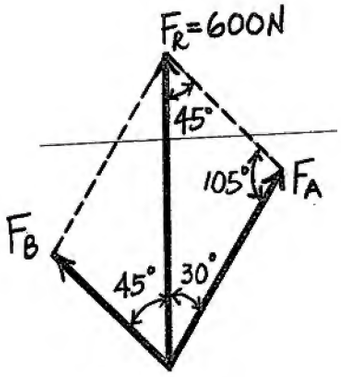

(a)



(b)

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–29. The beam is to be hoisted using two chains. If the resultant force is to be 600 N directed along the positive y axis, determine the magnitudes of forces $\mathbf{F}_A$ and $\mathbf{F}_B$ acting on each chain and the angle θ of $\mathbf{F}_B$ so that the magnitude of $\mathbf{F}_B$ is a *minimum*. $\mathbf{F}_A$ acts at 30° from the y axis, as shown.

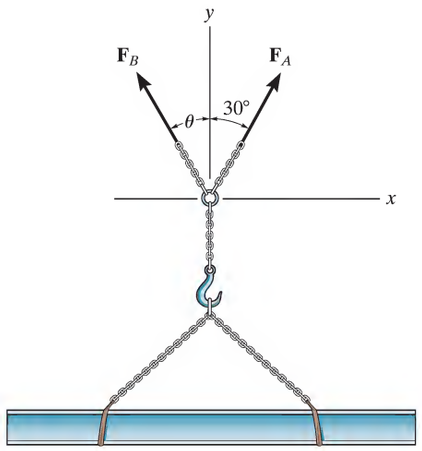

For minimum F_B, require

$\theta = 60°$ Ans

$F_A = 600 \cos 30° = 520$ N Ans

$F_B = 600 \sin 30° = 300$ N Ans

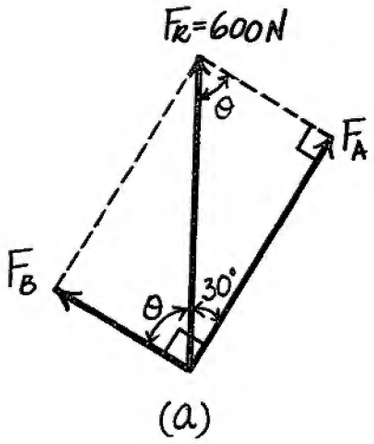

(a)

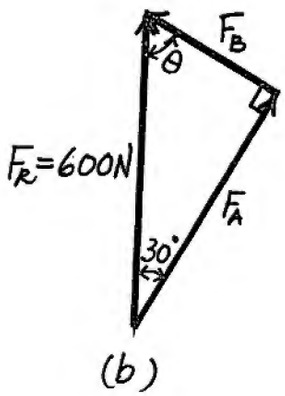

(b)

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–30. Three chains act on the bracket such that they create a resultant force having a magnitude of 500 lb. If two of the chains are subjected to known forces, as shown, determine the angle θ of the third chain measured clockwise from the positive x axis, so that the magnitude of force **F** in this chain is a *minimum*. All forces lie in the x–y plane. What is the magnitude of **F**? *Hint*: First find the resultant of the two known forces. Force **F** acts in this direction.

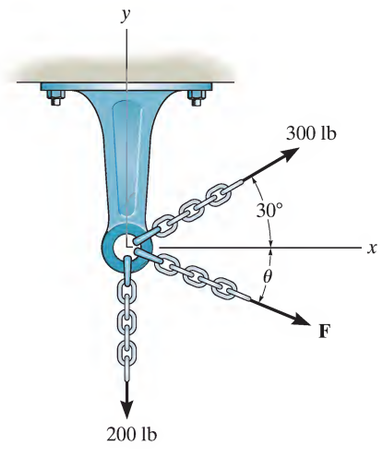

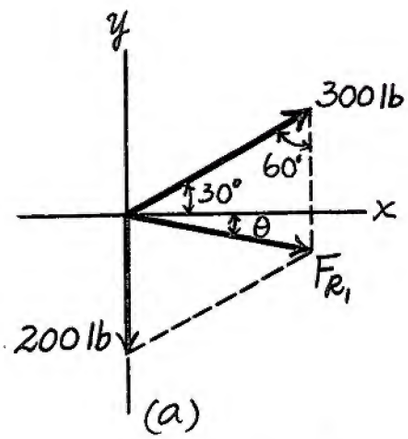



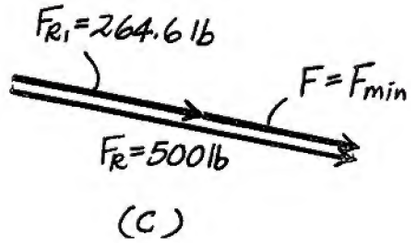

Cosine law:

$$F_{R1} = \sqrt{300^2 + 200^2 - 2(300)(200)\cos 60^\circ} = 264.6 \text{ lb}$$

Sine law:

$$\frac{\sin(30^\circ + \theta)}{200} = \frac{\sin 60^\circ}{264.6} \qquad \theta = 10.9^\circ \qquad \textbf{Ans}$$

When F is directed along F_{R1}, F will be minimum to create the resultant force.

$$F_R = F_{R1} + F$$
$$500 = 264.6 + F_{min}$$
$$F_{min} = 235 \text{ lb} \qquad \textbf{Ans}$$

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–31. Three cables pull on the pipe such that they create a resultant force having a magnitude of 900 lb. If two of the cables are subjected to known forces, as shown in the figure, determine the angle θ of the third cable so that the magnitude of force **F** in this cable is a *minimum*. All forces lie in the x–y plane. What is the magnitude of **F**? *Hint*: First find the resultant of the two known forces.

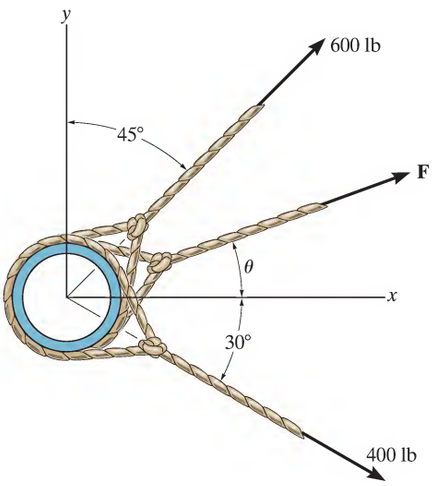

$$F' = \sqrt{(600)^2 + (400)^2 - 2(600)(400)\cos 105^\circ} = 802.64 \text{ lb}$$

$$F = 900 - 802.64 = 97.4 \text{ lb} \quad \text{Ans}$$

$$\frac{\sin\phi}{600} = \frac{\sin 105^\circ}{802.64}; \quad \phi = 46.22^\circ$$

$$\theta = 46.22^\circ - 30^\circ = 16.2^\circ \quad \text{Ans}$$

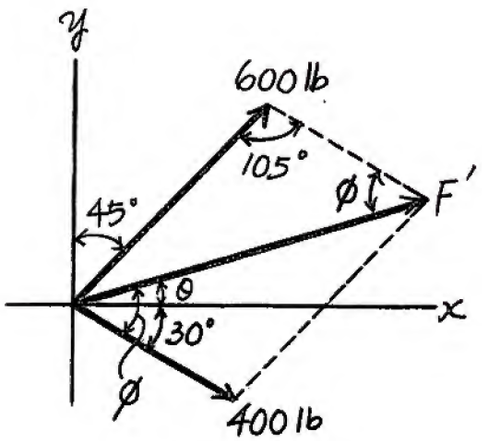

(a)

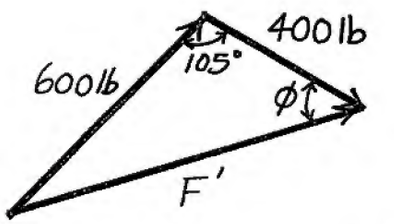

(b)

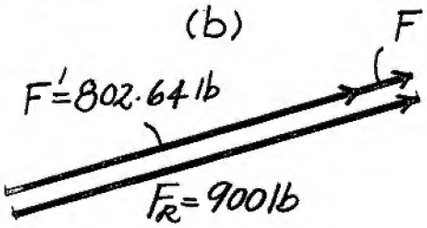

(c)

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***2–32.** Determine the magnitude of the resultant force acting on the pin and its direction measured clockwise from the positive x axis.

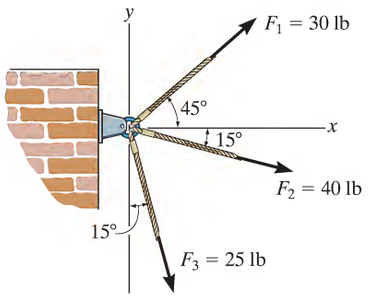

Rectangular Components: By referring to Fig. a, the x and y components of $\mathbf{F}_1$, $\mathbf{F}_2$, and $\mathbf{F}_3$ can be written as

$$(F_1)_x = 30\cos 45° = 21.21\text{ lb} \qquad (F_1)_y = 30\sin 45° = 21.21\text{ lb}$$
$$(F_2)_x = 40\cos 15° = 38.64\text{ lb} \qquad (F_2)_y = 40\sin 15° = 10.35\text{ lb}$$
$$(F_3)_x = 25\sin 15° = 6.47\text{ lb} \qquad (F_3)_y = 25\cos 15° = 24.15\text{ lb}$$

Resultant Force: Summing the force components algebraically along the x and y axes,

$$\overset{+}{\rightarrow}\Sigma(F_R)_x = \Sigma F_x; \quad (F_R)_x = 21.21 + 38.64 + 6.47 = 66.32\text{ lb} \rightarrow$$
$$+\uparrow \Sigma(F_R)_y = \Sigma F_y; \quad (F_R)_y = 21.21 - 10.35 - 24.15 = -13.29\text{ lb} = 13.29\text{ lb} \downarrow$$

The magnitude of the resultant force $\mathbf{F}_R$ is

$$F_R = \sqrt{(F_R)_x^2 + (F_R)_y^2} = \sqrt{66.32^2 + 13.29^2} = 67.6\text{ lb} \qquad \textbf{Ans.}$$

The direction angle θ of $\mathbf{F}_R$, measured clockwise from the positive x axis, is

$$\theta = \tan^{-1}\left[\frac{(F_R)_y}{(F_R)_x}\right] = \tan^{-1}\left(\frac{13.29}{66.32}\right) = 11.3° \qquad \textbf{Ans.}$$

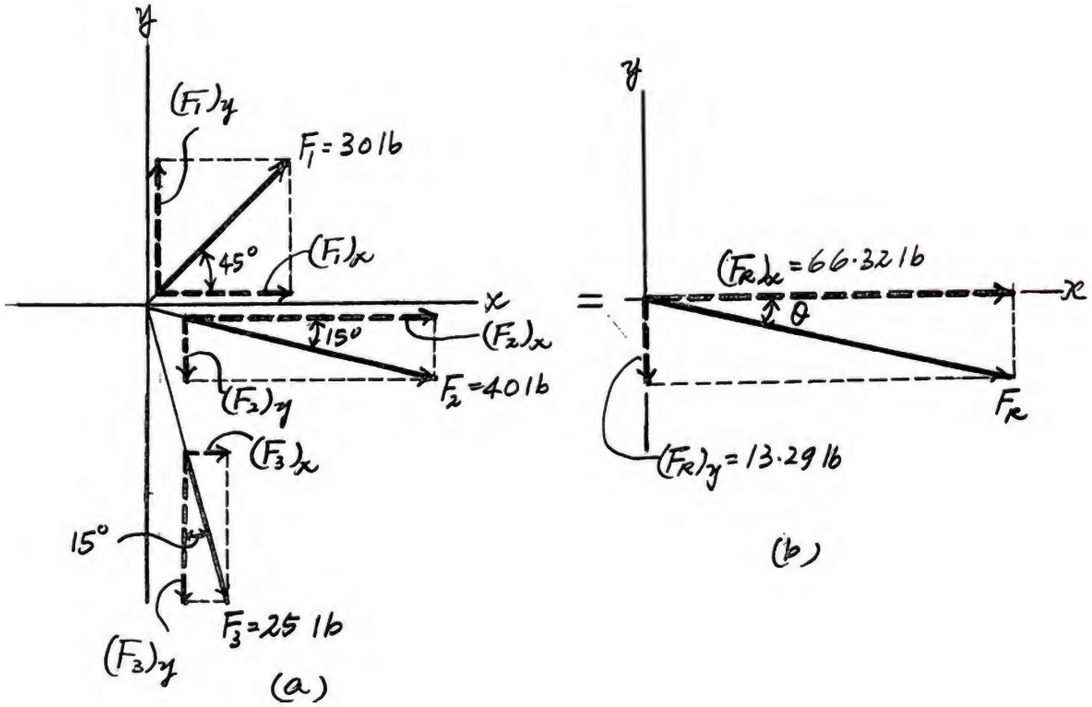

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–33. If $F_1 = 600\,\text{N}$ and $\phi = 30°$, determine the magnitude of the resultant force acting on the eyebolt and its direction measured clockwise from the positive x axis.

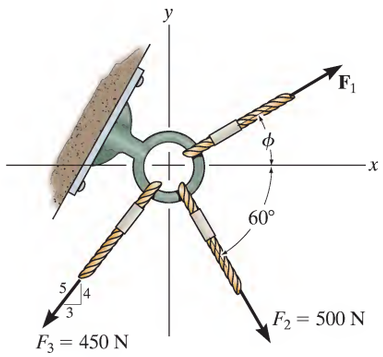

Rectangular Components: By referring to Fig. a, the x and y components of each force can be written as

$$(F_1)_x = 600\cos 30° = 519.62\,\text{N} \quad (F_1)_y = 600\sin 30° = 300\,\text{N}$$
$$(F_2)_x = 500\cos 60° = 250\,\text{N} \quad (F_2)_y = 500\sin 60° = 433.0\,\text{N}$$
$$(F_3)_x = 450\left(\frac{3}{5}\right) = 270\,\text{N} \quad (F_3)_y = 450\left(\frac{4}{5}\right) = 360\,\text{N}$$

Resultant Force: Summing the force components algebraically along the x and y axes,

$$\stackrel{+}{\rightarrow}\Sigma(F_R)_x = \Sigma F_x; \quad (F_R)_x = 519.62 + 250 - 270 = 499.62\,\text{N} \rightarrow$$
$$+\uparrow \Sigma(F_R)_y = \Sigma F_y; \quad (F_R)_y = 300 - 433.01 - 360 = -493.01\,\text{N} = 493.01\,\text{N} \downarrow$$

The magnitude of the resultant force $\mathbf{F}_R$ is

$$F_R = \sqrt{(F_R)_x^2 + (F_R)_y^2} = \sqrt{499.62^2 + 493.01^2} = 701.91\,\text{N} = 702\,\text{N} \quad \textbf{Ans.}$$

The direction angle θ of $\mathbf{F}_R$, Fig. b, measured clockwise from the x axis, is

$$\theta = \tan^{-1}\left[\frac{(F_R)_y}{(F_R)_x}\right] = \tan^{-1}\left(\frac{493.01}{499.62}\right) = 44.6° \quad \textbf{Ans.}$$

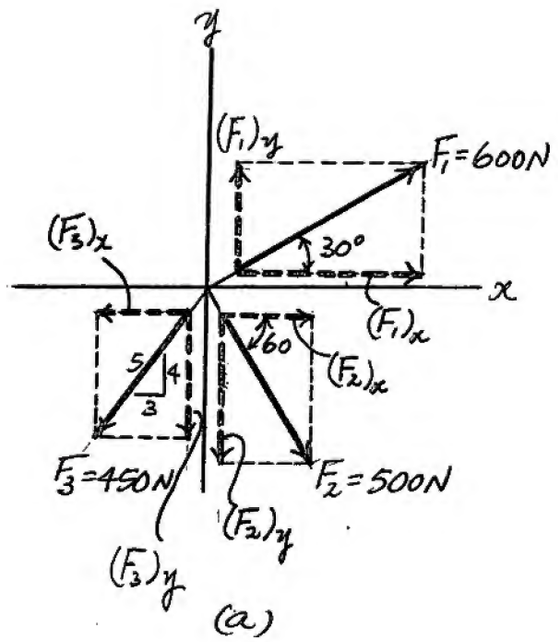

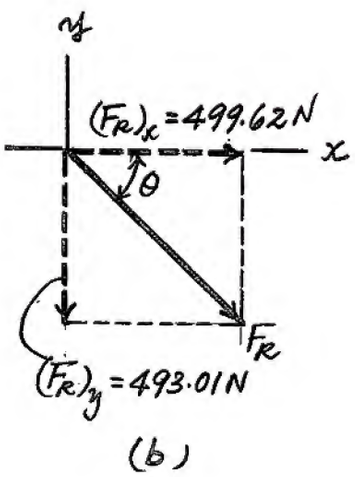

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–34. If the magnitude of the resultant force acting on the eyebolt is 600 N and its direction measured clockwise from the positive x axis is $\theta = 30°$, determine the magnitude of $\mathbf{F}_1$ and the angle ϕ.

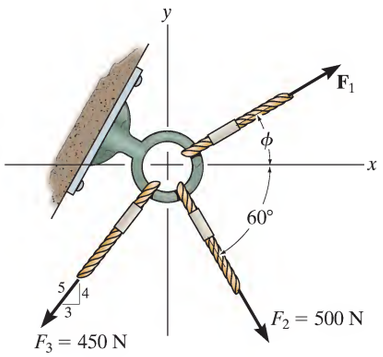

Rectangular Components: By referring to Figs. *a* and *b*, the x and y components of $\mathbf{F}_1$, $\mathbf{F}_2$, $\mathbf{F}_3$, and $\mathbf{F}_R$ can be written as

$$(F_1)_x = F_1\cos\phi \qquad (F_1)_y = F_1\sin\phi$$
$$(F_2)_x = 500\cos 60° = 250\,\text{N} \qquad (F_2)_y = 500\sin 60° = 433.01\,\text{N}$$
$$(F_3)_x = 450\left(\frac{3}{5}\right) = 270\,\text{N} \qquad (F_3)_y = 450\left(\frac{4}{5}\right) = 360\,\text{N}$$
$$(F_R)_x = 600\cos 30° = 519.62\,\text{N} \qquad (F_R)_y = 600\sin 30° = 300\,\text{N}$$

Resultant Force: Summing the force components algebraically along the x and y axes,

$$\stackrel{+}{\rightarrow}\Sigma(F_R)_x = \Sigma F_x; \quad 519.62 = F_1\cos\phi + 250 - 270$$
$$F_1\cos\phi = 539.62 \qquad (1)$$
$$+\uparrow \Sigma(F_R)_y = \Sigma F_y; \quad -300 = F_1\sin\phi - 433.01 - 360$$
$$F_1\sin\phi = 493.01 \qquad (2)$$

Solving Eqs. (1) and (2), yields

$$\phi = 42.4° \qquad F_1 = 731\,\text{N} \qquad \textbf{Ans.}$$

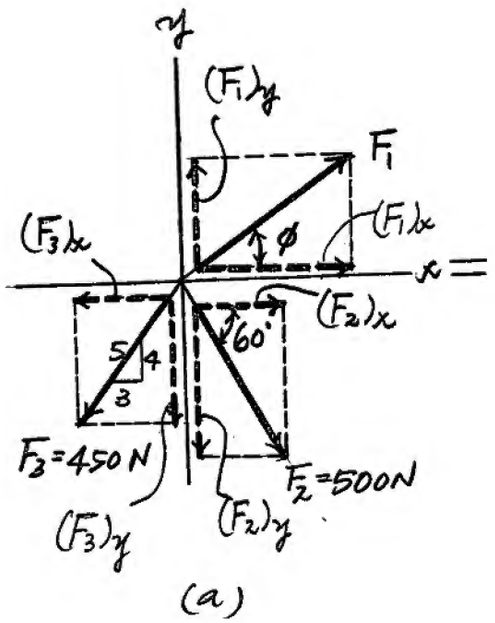

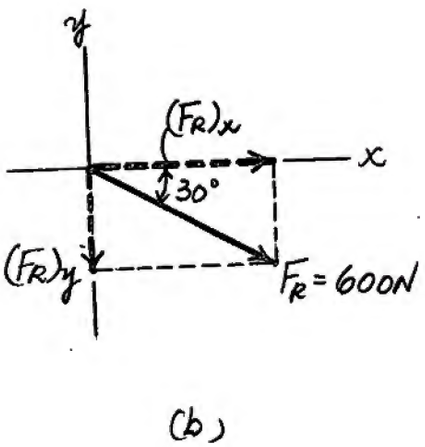

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–35. The contact point between the femur and tibia bones of the leg is at A. If a vertical force of 175 lb is applied at this point, determine the components along the x and y axes. Note that the y component represents the normal force on the load-bearing region of the bones. Both the x and y components of this force cause synovial fluid to be squeezed out of the bearing space.

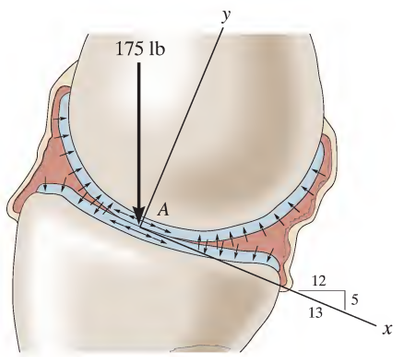

$$F_x = 175\left(\frac{5}{13}\right) = 67.3 \text{ lb} \quad \textbf{Ans}$$

$$F_y = -175\left(\frac{12}{13}\right) = -162 \text{ lb} \quad \textbf{Ans}$$

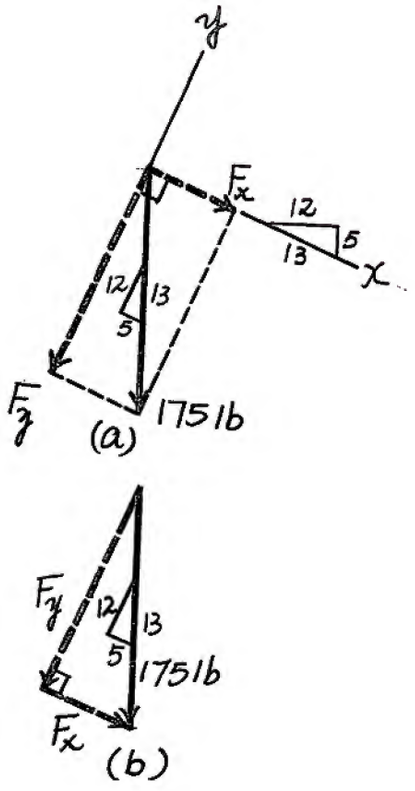

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***2–36.** If $\phi = 30°$ and $F_2 = 3$ kN, determine the magnitude of the resultant force acting on the plate and its direction θ measured clockwise from the positive x axis.

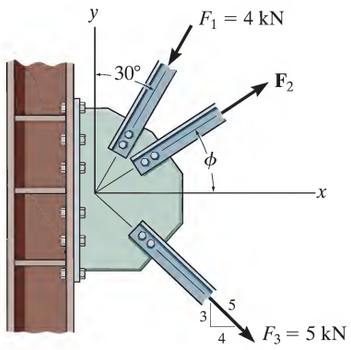

Rectangular Components: By referring to Fig. *a*, the x and y components of $\mathbf{F}_1$, $\mathbf{F}_2$, and $\mathbf{F}_3$ can be written as

$$(F_1)_x = 4\sin 30° = 2\,\text{kN} \qquad (F_1)_y = 4\cos 30° = 3.464\,\text{kN}$$
$$(F_2)_x = 3\cos 30° = 2.598\,\text{kN} \qquad (F_2)_y = 3\sin 30° = 1.50\,\text{kN}$$
$$(F_3)_x = 5\left(\frac{4}{5}\right) = 4\,\text{kN} \qquad (F_3)_y = 5\left(\frac{3}{5}\right) = 3\,\text{kN}$$

Resultant Force: Summing the force components algebraically along the x and y axes,

$$\stackrel{+}{\rightarrow}\Sigma(F_R)_x = \Sigma F_x; \quad (F_R)_x = -2 + 2.598 + 4 = 4.598\,\text{kN} \rightarrow$$
$$+\uparrow \Sigma(F_R)_y = \Sigma F_y; \quad (F_R)_y = -3.464 + 1.50 - 3 = -4.964\,\text{kN} = 4.964\,\text{kN} \downarrow$$

The magnitude of the resultant force $\mathbf{F}_R$ is

$$F_R = \sqrt{(F_R)_x^2 + (F_R)_y^2} = \sqrt{4.598^2 + 4.964^2} = 6.77\,\text{kN} \qquad \textbf{Ans.}$$

The direction angle θ of $\mathbf{F}_R$, Fig. *b*, measured clockwise from the positive x axis, is

$$\theta = \tan^{-1}\left[\frac{(F_R)_y}{(F_R)_x}\right] = \tan^{-1}\left(\frac{4.964}{4.598}\right) = 47.2° \qquad \textbf{Ans.}$$

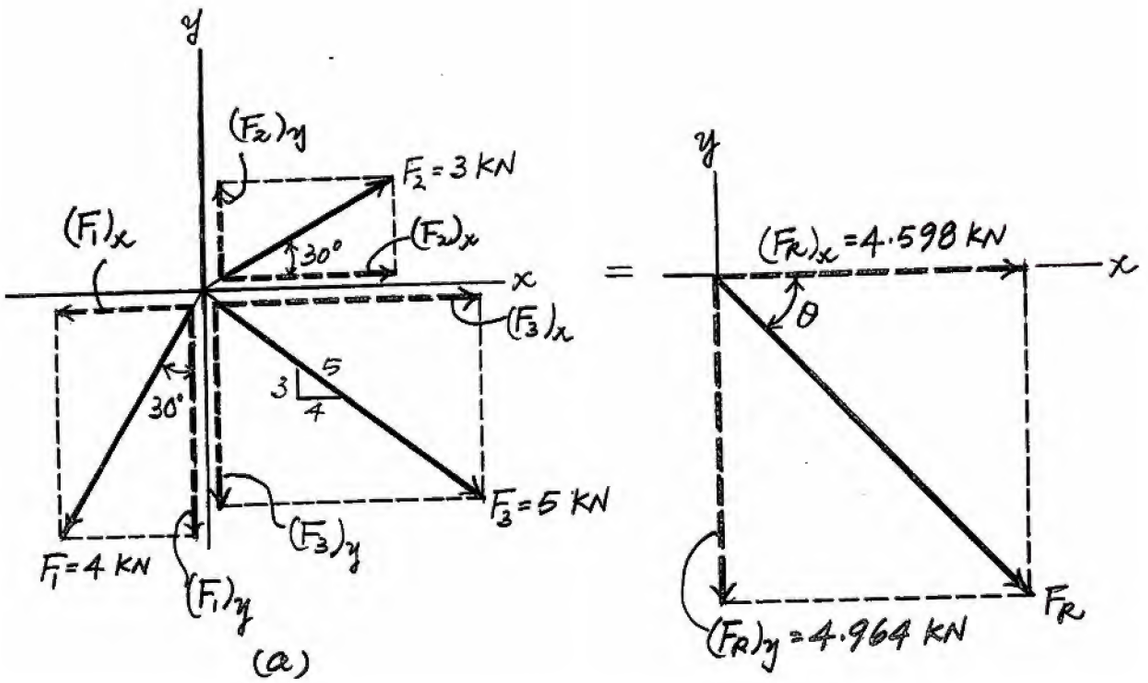

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–37. If the magnitude for the resultant force acting on the plate is required to be 6 kN and its direction measured clockwise from the positive x axis is $\theta = 30°$, determine the magnitude of $\mathbf{F}_2$ and its direction ϕ.

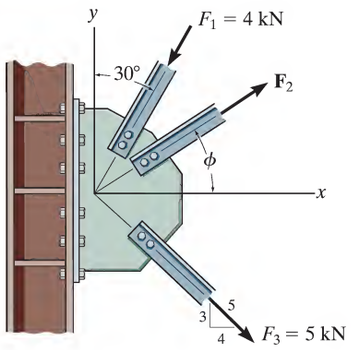

Rectangular Components: By referring to Figs. *a* and *b*, the x and y components of $\mathbf{F}_1$, $\mathbf{F}_2$, $\mathbf{F}_3$, and $\mathbf{F}_R$ can be written as

$$(F_1)_x = 4\sin 30° = 2\,\text{kN} \qquad (F_1)_y = 4\cos 30° = 3.464\,\text{kN}$$

$$(F_2)_x = F_2\cos\phi \qquad (F_2)_y = F_2\sin\phi$$

$$(F_3)_x = 5\left(\frac{4}{5}\right) = 4\,\text{kN} \qquad (F_3)_y = 5\left(\frac{3}{5}\right) = 3\,\text{kN}$$

$$(F_R)_x = 6\cos 30° = 5.196\,\text{kN} \qquad (F_R)_y = 6\sin 30° = 3\,\text{kN}$$

Resultant Force: Summing the force components algebraically along the x and y axes,

$$\stackrel{+}{\rightarrow}\Sigma(F_R)_x = \Sigma F_x; \quad 5.196 = -2 + F_2\cos\phi + 4$$

$$F_2\cos\phi = 3.196 \qquad (1)$$

$$+\uparrow \Sigma(F_R)_y = \Sigma F_y; \quad -3 = -3.464 + F_2\sin\phi - 3$$

$$F_2\sin\phi = 3.464 \qquad (2)$$

Solving Eqs. (1) and (2), yields

$$\phi = 47.3° \qquad F_2 = 4.71\,\text{kN} \qquad \textbf{Ans.}$$

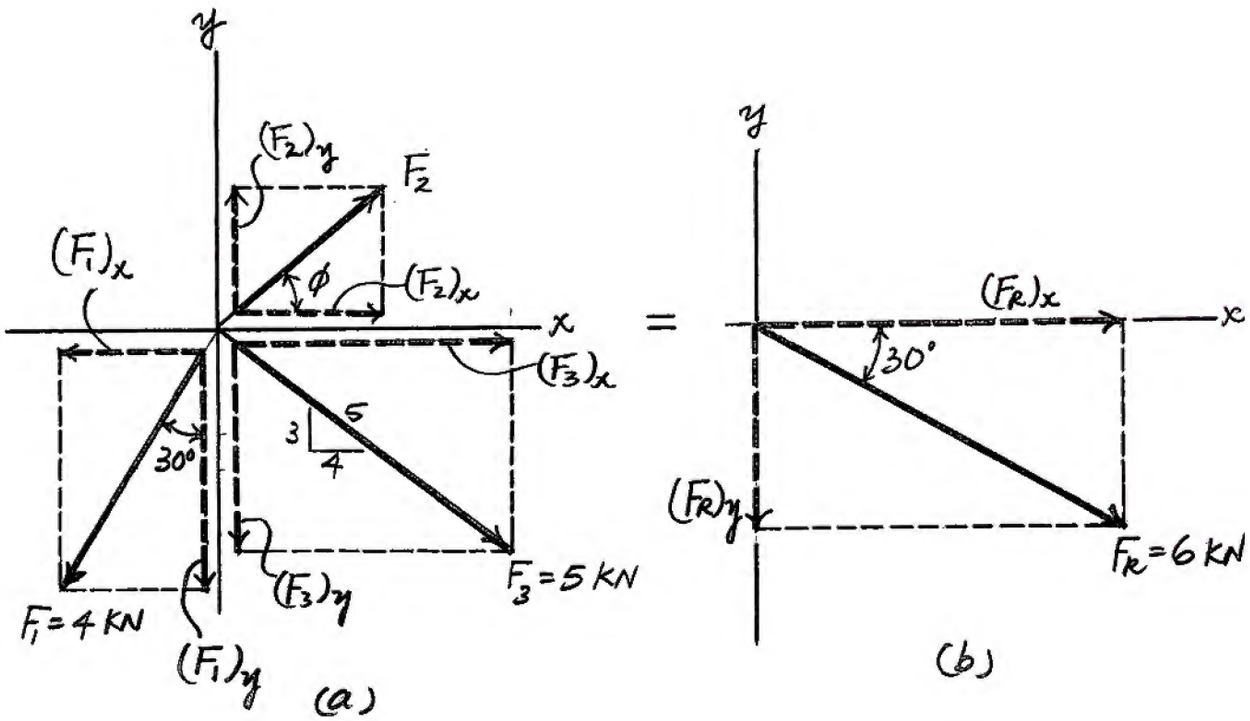

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–38. If $\phi = 30°$ and the resultant force acting on the gusset plate is directed along the positive x axis, determine the magnitudes of $\mathbf{F}_2$ and the resultant force.

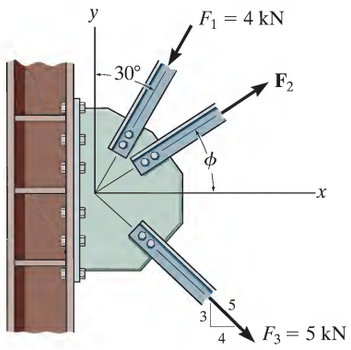

Rectangular Components: By referring to Fig. *a*, the x and y components of $\mathbf{F}_1$, $\mathbf{F}_2$, $\mathbf{F}_3$, and $\mathbf{F}_R$ can be written as

$$(F_1)_x = 4\sin 30° = 2\,\text{kN} \qquad (F_1)_y = 4\cos 30° = 3.464\,\text{kN}$$

$$(F_2)_x = F_2\cos 30° = 0.8660F_2 \qquad (F_2)_y = F_2\sin 30° = 0.5F_2$$

$$(F_3)_x = 5\left(\frac{4}{5}\right) = 4\,\text{kN} \qquad (F_3)_y = 5\left(\frac{3}{5}\right) = 3\,\text{kN}$$

$$(F_R)_x = F_R \qquad (F_R)_y = 0$$

Resultant Force: Summing the force components algebraically along the x and y axes,

$$+\uparrow \Sigma(F_R)_y = \Sigma F_y; \quad 0 = -3.464 + 0.5F_2 - 3$$

$$F_2 = 12.93\,\text{kN} \approx 12.9\,\text{kN} \qquad \textbf{Ans.}$$

$$\overset{+}{\rightarrow}\Sigma(F_R)_x = \Sigma F_x; \quad F_R = -2 + 0.8660(12.93) + 4$$

$$= 13.2\,\text{kN} \qquad \textbf{Ans.}$$

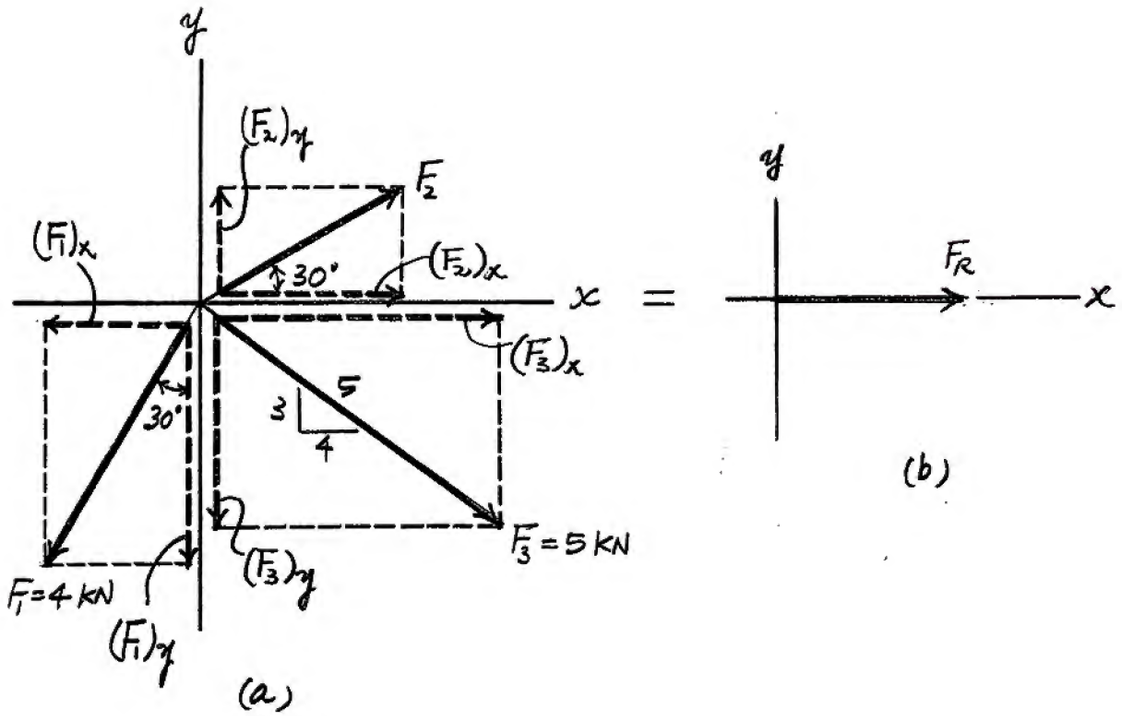

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–39. Determine the magnitude of $\mathbf{F}_1$ and its direction θ so that the resultant force is directed vertically upward and has a magnitude of 800 N.

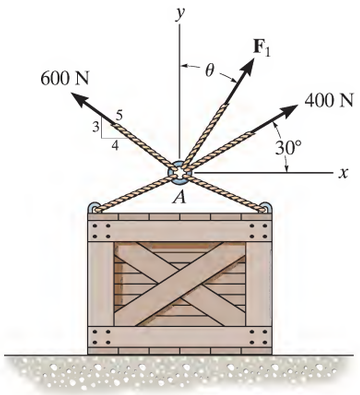

Scalar Notation : Suming the force components algebraically, we have

$$\stackrel{+}{\rightarrow} F_{R_x} = \Sigma F_x; \quad F_{R_x} = 0 = F_1 \sin\theta + 400\cos 30° - 600\left(\frac{4}{5}\right)$$

$$F_1 \sin\theta = 133.6 \qquad [1]$$

$$+\uparrow F_{R_y} = \Sigma F_y; \quad F_{R_y} = 800 = F_1 \cos\theta + 400\sin 30° + 600\left(\frac{3}{5}\right)$$

$$F_1 \cos\theta = 240 \qquad [2]$$

Solving Eq. [1] and [2] yields

$$\theta = 29.1° \qquad F_1 = 275\ \text{N} \qquad \text{Ans}$$

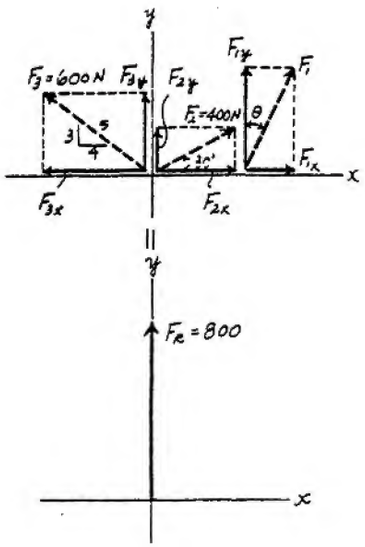

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***2–40.** Determine the magnitude and direction measured counterclockwise from the positive x axis of the resultant force of the three forces acting on the ring A. Take $F_1 = 500$ N and $\theta = 20°$.

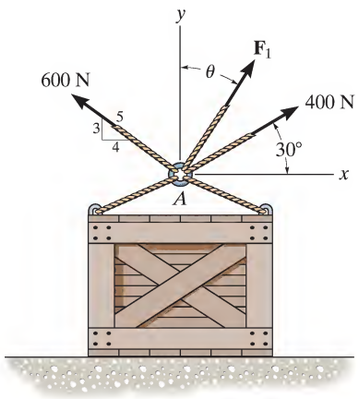

Scalar Notation : Suming the force components algebraically, we have

$$\stackrel{+}{\rightarrow} F_{R_x} = \Sigma F_x; \quad F_{R_x} = 500\sin 20° + 400\cos 30° - 600\left(\frac{4}{5}\right)$$
$$= 37.42 \text{ N} \rightarrow$$

$$+\uparrow F_{R_y} = \Sigma F_y; \quad F_{R_y} = 500\cos 20° + 400\sin 30° + 600\left(\frac{3}{5}\right)$$
$$= 1029.8 \text{ N} \uparrow$$

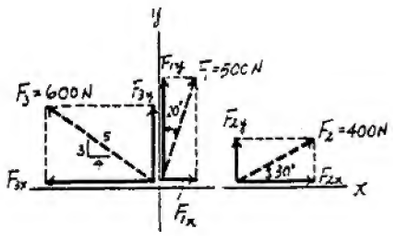

The magnitude of the resultant force $\mathbf{F}_R$ is

$$F_R = \sqrt{F_{R_x}^2 + F_{R_y}^2} = \sqrt{37.42^2 + 1029.8^2} = 1030.5 \text{ N} = 1.03 \text{ kN} \quad \textbf{Ans}$$

The directional angle θ measured counterclockwise from positive x axis is

$$\theta = \tan^{-1}\frac{F_{R_y}}{F_{R_x}} = \tan^{-1}\left(\frac{1029.8}{37.42}\right) = 87.9° \quad \textbf{Ans}$$



© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–41. Determine the magnitude and direction θ of $\mathbf{F}_B$ so that the resultant force is directed along the positive y axis and has a magnitude of 1500 N.

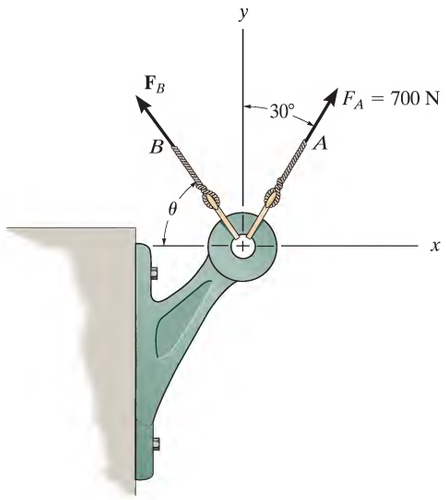

Scalar Notation : Suming the force components algebraically, we have

$$\stackrel{+}{\rightarrow} F_{R_x} = \Sigma F_x; \quad 0 = 700\sin 30° - F_B \cos\theta$$

$$F_B \cos\theta = 350 \qquad [1]$$

$$+\uparrow F_{R_y} = \Sigma F_y; \quad 1500 = 700\cos 30° + F_B \sin\theta$$

$$F_B \sin\theta = 893.8 \qquad [2]$$

Solving Eq. [1] and [2] yields

$$\theta = 68.6° \quad F_B = 960\ \text{N} \qquad \text{Ans}$$

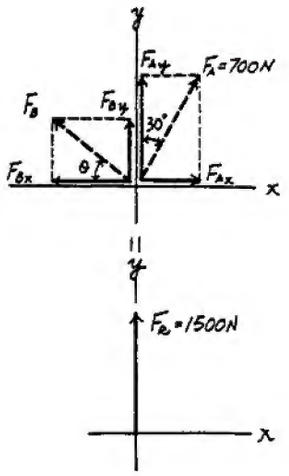

=

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–42. Determine the magnitude and angle measured counterclockwise from the positive y axis of the resultant force acting on the bracket if $F_B = 600$ N and $\theta = 20°$.

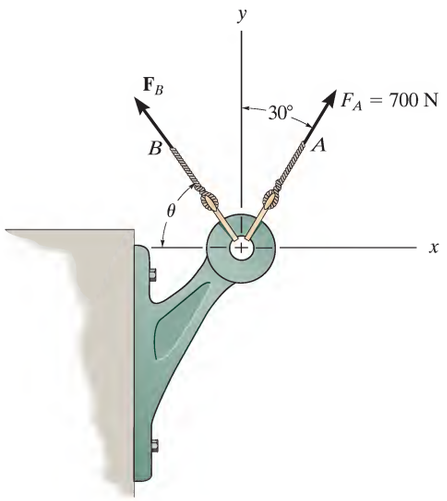

Scalar Notation : Suming the force components algebraically, we have

$$\stackrel{+}{\rightarrow} F_{R_x} = \Sigma F_x; \quad F_{R_x} = 700\sin 30° - 600\cos 20° = -213.8 \text{ N} = 213.8 \text{ N} \leftarrow$$

$$+\uparrow F_{R_y} = \Sigma F_y; \quad F_{R_y} = 700\cos 30° + 600\sin 20° = 811.4 \text{ N} \uparrow$$

The magnitude of the resultant force $\mathbf{F}_R$ is

$$F_R = \sqrt{F_{R_x}^2 + F_{R_y}^2} = \sqrt{213.8^2 + 811.4^2} = 839 \text{ N} \qquad \text{Ans}$$

The directional angle θ measured counterclockwise from positive y axis is

$$\phi = \tan^{-1}\frac{F_{R_x}}{F_{R_y}} = \tan^{-1}\left(\frac{213.8}{811.4}\right) = 14.8° \qquad \text{Ans}$$

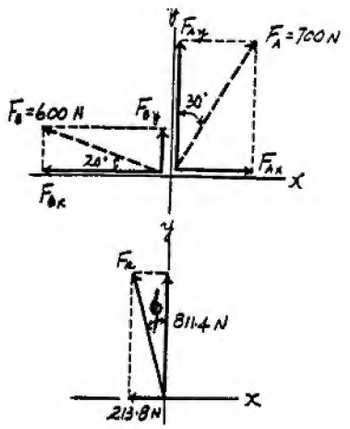

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–43. If $\phi = 30°$ and $F_1 = 250$ lb, determine the magnitude of the resultant force acting on the bracket and its direction measured clockwise from the positive x axis.

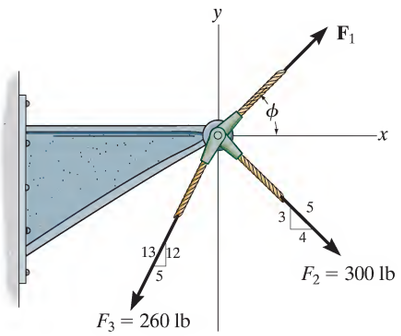

Rectangular Components: By referring to Fig. *a*, the x and y components of $\mathbf{F}_1$, $\mathbf{F}_2$, and $\mathbf{F}_3$ can be written as

$$(F_1)_x = 250\cos 30° = 216.51 \text{ lb} \qquad (F_1)_y = 250\sin 30° = 125 \text{ lb}$$

$$(F_2)_x = 300\left(\frac{4}{5}\right) = 240 \text{ lb} \qquad (F_2)_y = 300\left(\frac{3}{5}\right) = 180 \text{ lb}$$

$$(F_3)_x = 260\left(\frac{5}{13}\right) = 100 \text{ lb} \qquad (F_3)_y = 260\left(\frac{12}{13}\right) = 240 \text{ lb}$$

Resultant Force: Summing the force components algebraically along the x and y axes,

$$\overset{+}{\rightarrow}\Sigma(F_R)_x = \Sigma F_x; \quad (F_R)_x = 216.51 + 240 - 100 = 356.51 \text{ lb} \rightarrow$$

$$+\uparrow \Sigma(F_R)_y = \Sigma F_y; \quad (F_R)_y = 125 - 180 - 240 = -295 \text{ lb} = 295 \text{ lb} \downarrow$$

The magnitude of the resultant force $\mathbf{F}_R$ is

$$F_R = \sqrt{(F_R)_x^2 + (F_R)_y^2} = \sqrt{356.51^2 + 295^2} = 463 \text{ lb} \qquad \textbf{Ans.}$$

The direction angle θ of $\mathbf{F}_R$, Fig. *b*, measured clockwise from the positive x axis, is

$$\theta = \tan^{-1}\left[\frac{(F_R)_y}{(F_R)_x}\right] = \tan^{-1}\left(\frac{295}{356.51}\right) = 39.6° \qquad \textbf{Ans.}$$

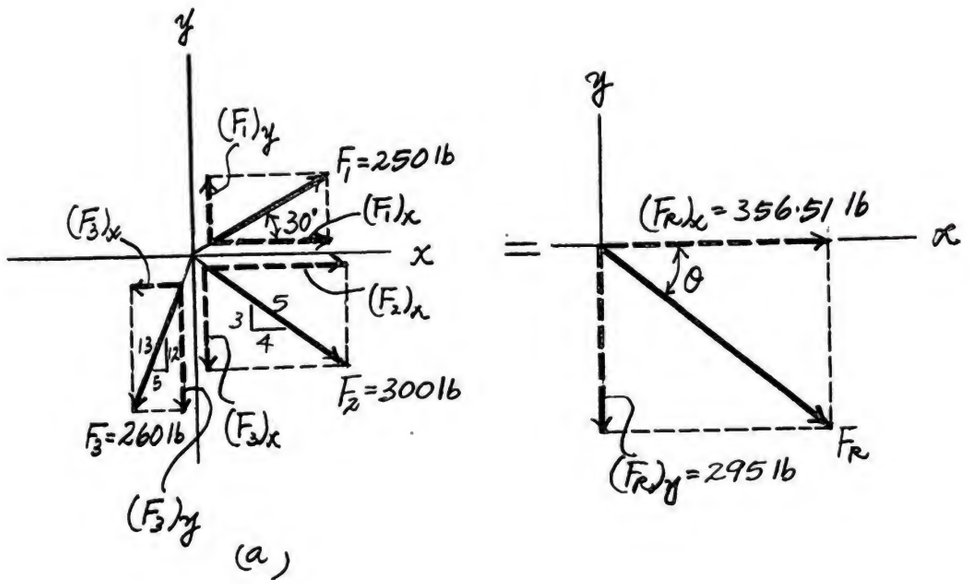

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***2–44.** If the magnitude of the resultant force acting on the bracket is 400 lb directed along the positive x axis, determine the magnitude of $\mathbf{F}_1$ and its direction ϕ.

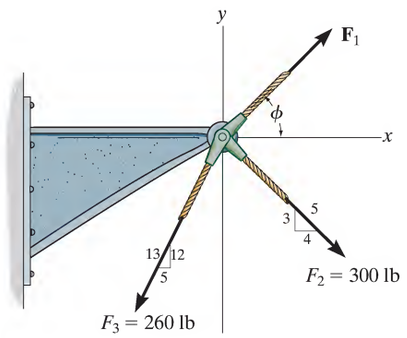

Rectangular Components: By referring to Fig. *a*, the x and y components of $\mathbf{F}_1$, $\mathbf{F}_2$, $\mathbf{F}_3$, and $\mathbf{F}_R$ can be written as

$$(F_1)_x = F_1\cos\phi \qquad (F_1)_y = F_1\sin\phi$$

$$(F_2)_x = 300\left(\frac{4}{5}\right) = 240\text{ lb} \qquad (F_2)_y = 300\left(\frac{3}{5}\right) = 180\text{ lb}$$

$$(F_3)_x = 260\left(\frac{5}{13}\right) = 100\text{ lb} \qquad (F_3)_y = 260\left(\frac{12}{13}\right) = 240\text{ lb}$$

$$(F_R)_x = 400\text{ lb} \qquad (F_R)_y = 0$$

Resultant Force: Summing the force components algebraically along the x and y axes,

$$\stackrel{+}{\rightarrow}\Sigma(F_R)_x = \Sigma F_x;\quad 400 = F_1\cos\phi + 240 - 100$$

$$F_1\cos\phi = 260 \qquad (1)$$

$$+\uparrow \Sigma(F_R)_y = \Sigma F_y;\quad 0 = F_1\sin\phi - 180 - 240$$

$$F_1\sin\phi = 420 \qquad (2)$$

Solving Eqs. (1) and (2), yields

$$\phi = 58.2° \qquad F_1 = 494\text{ lb} \qquad \textbf{Ans.}$$

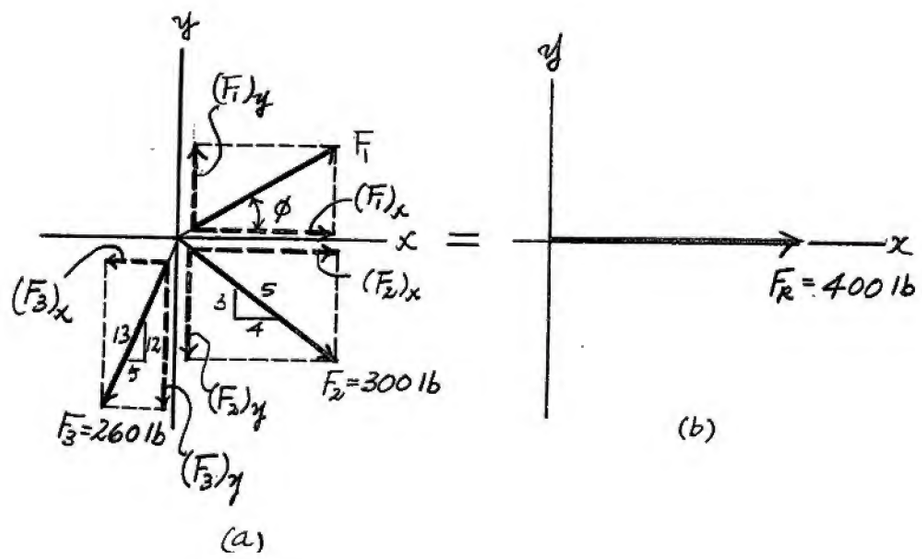

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–45. If the resultant force acting on the bracket is to be directed along the positive x axis and the magnitude of $\mathbf{F}_1$ is required to be a minimum, determine the magnitudes of the resultant force and $\mathbf{F}_1$.

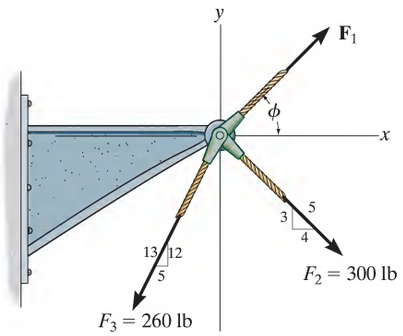

Rectangular Components: By referring to Figs. *a* and *b*, the x and y components of $\mathbf{F}_1$, $\mathbf{F}_2$, $\mathbf{F}_3$, and $\mathbf{F}_R$ can be written as

$$(F_1)_x = F_1\cos\phi \qquad (F_1)_y = F_1\sin\phi$$

$$(F_2)_x = 300\left(\frac{4}{5}\right) = 240\text{ lb} \qquad (F_2)_y = 300\left(\frac{3}{5}\right) = 180\text{ lb}$$

$$(F_3)_x = 260\left(\frac{5}{13}\right) = 100\text{ lb} \qquad (F_3)_y = 260\left(\frac{12}{13}\right) = 240\text{ lb}$$

$$(F_R)_x = F_R \qquad (F_R)_y = 0$$

Resultant Force: Summing the force components algebraically along the x and y axes,

$$+\uparrow \Sigma(F_R)_y = \Sigma F_y;\quad 0 = F_1\sin\phi - 180 - 240$$

$$F_1 = \frac{420}{\sin\phi} \qquad (1)$$

$$\stackrel{+}{\rightarrow}\Sigma(F_R)_x = \Sigma F_x;\quad F_R = F_1\cos\phi + 240 - 100 \qquad (2)$$

By inspecting Eq. (1), we realize that F_1 is minimum when $\sin\phi = 1$ or $\phi = 90°$. Thus,

$$F_1 = 420\text{ lb} \qquad \textbf{Ans.}$$

Substituting these results into Eq. (2), yields

$$F_R = 140\text{ lb} \qquad \textbf{Ans.}$$

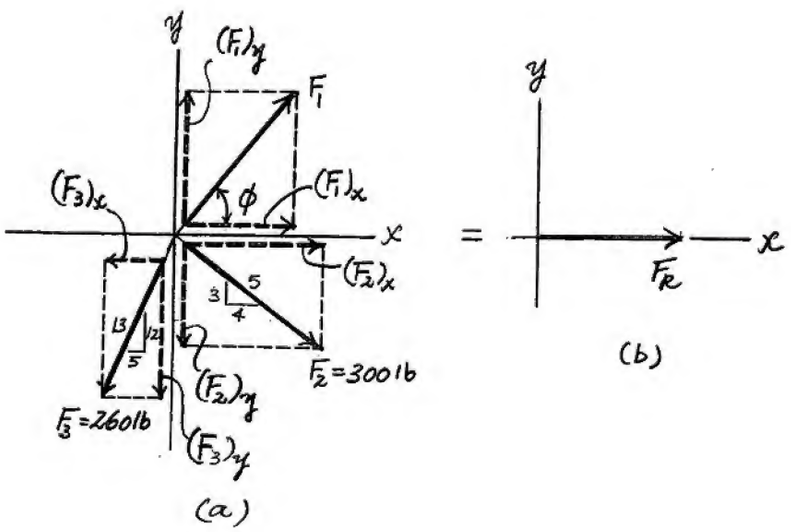

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–46. The three concurrent forces acting on the screw eye produce a resultant force $\mathbf{F}_R = 0$. If $F_2 = \frac{2}{3} F_1$ and $\mathbf{F}_1$ is to be 90° from $\mathbf{F}_2$ as shown, determine the required magnitude of $\mathbf{F}_3$ expressed in terms of F_1 and the angle θ.

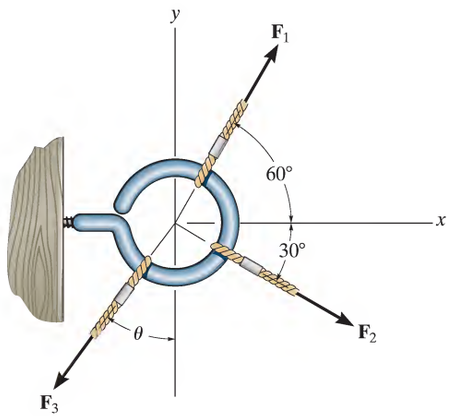

Cartesian Vector Notation :

$$\mathbf{F}_1 = F_1 \cos 60°\,\mathbf{i} + F_1 \sin 60°\,\mathbf{j}$$
$$= 0.50F_1\,\mathbf{i} + 0.8660F_1\,\mathbf{j}$$

$$\mathbf{F}_2 = \frac{2}{3}F_1 \cos 30°\,\mathbf{i} - \frac{2}{3}F_1 \sin 30°\,\mathbf{j}$$
$$= 0.5774F_1\,\mathbf{i} - 0.3333F_1\,\mathbf{j}$$

$$\mathbf{F}_3 = -F_3 \sin\theta\,\mathbf{i} - F_3 \cos\theta\,\mathbf{j}$$

Resultant Force :

$$\mathbf{F}_R = 0 = \mathbf{F}_1 + \mathbf{F}_2 + \mathbf{F}_3$$
$$0 = (0.50F_1 + 0.5774F_1 - F_3 \sin\theta)\,\mathbf{i}$$
$$+ (0.8660F_1 - 0.3333F_1 - F_3 \cos\theta)\,\mathbf{j}$$

Equating i and j components, we have

$$0.50F_1 + 0.5774F_1 - F_3 \sin\theta = 0 \qquad [1]$$

$$0.8660F_1 - 0.3333F_1 - F_3 \cos\theta = 0 \qquad [2]$$

Solving Eq. [1] and [2] yields

$$\theta = 63.7° \qquad F_3 = 1.20F_1 \qquad \text{Ans}$$

2–47. Determine the magnitude of $\mathbf{F}_A$ and its direction θ so that the resultant force is directed along the positive x axis and has a magnitude of 1250 N.

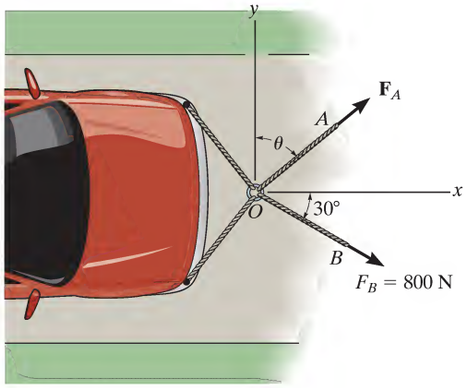

Scalar Notation : Suming the force components algebraically, we have

$$\overset{+}{\rightarrow} F_{R_x} = \Sigma F_x; \qquad 1250 = F_A \sin\theta + 800\cos 30°$$
$$F_A \sin\theta = 557.18 \qquad [1]$$

$$+\uparrow F_{R_y} = \Sigma F_y; \qquad 0 = F_A \cos\theta - 800\sin 30°$$
$$F_A \cos\theta = 400 \qquad [2]$$

Solving Eq. [1] and [2] yields

$$\theta = 54.3° \qquad F_A = 686\ \text{N} \qquad \text{Ans}$$

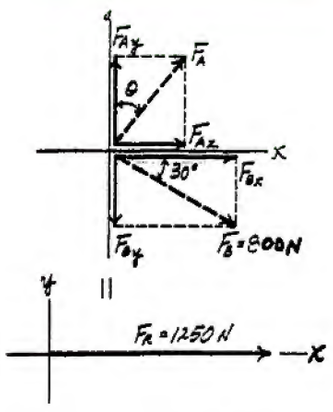

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***2–48.** Determine the magnitude and direction measured counterclockwise from the positive x axis of the resultant force acting on the ring at O if $F_A = 750$ N and $\theta = 45°$.

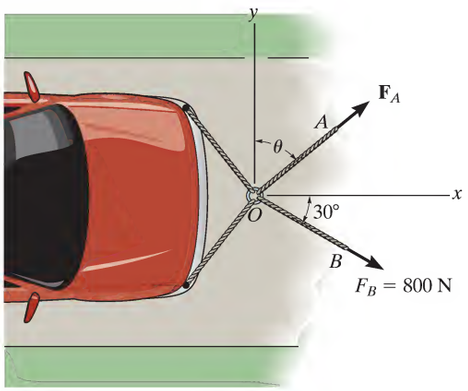

Scalar Notation : Suming the force components algebraically, we have

$$\stackrel{+}{\rightarrow} F_{R_x} = \Sigma F_x; \quad F_{R_x} = 750\sin 45° + 800\cos 30° = 1223.15 \text{ N} \rightarrow$$

$$+\uparrow F_{R_y} = \Sigma F_y; \quad F_{R_y} = 750\cos 45° - 800\sin 30° = 130.33 \text{ N} \uparrow$$

The magnitude of the resultant force $\mathbf{F}_R$ is

$$F_R = \sqrt{F_{R_x}^2 + F_{R_y}^2} = \sqrt{1223.15^2 + 130.33^2} = 1230 \text{ N} = 1.23 \text{ kN} \quad \textbf{Ans}$$

The directional angle θ measured counterclockwise from positive x axis is

$$\phi = \tan^{-1}\frac{F_{R_y}}{F_{R_x}} = \tan^{-1}\left(\frac{130.33}{1223.15}\right) = 6.08° \quad \textbf{Ans}$$





•2–49. Determine the magnitude of the resultant force and its direction measured counterclockwise from the positive x axis.

$$\mathbf{F}_1 = -60\left(\frac{1}{\sqrt{2}}\right)\mathbf{i} + 60\left(\frac{1}{\sqrt{2}}\right)\mathbf{j} = \{-42.43\mathbf{i} + 42.43\mathbf{j}\} \text{ lb}$$

$$\mathbf{F}_2 = -70\sin 60°\mathbf{i} - 70\cos 60°\mathbf{j} = \{-60.62\,\mathbf{i} - 35\,\mathbf{j}\} \text{ lb}$$

$$\mathbf{F}_3 = \{-50\,\mathbf{j}\} \text{ lb}$$

$$\mathbf{F}_R = \Sigma\mathbf{F} = \{-103.05\,\mathbf{i} - 42.57\,\mathbf{j}\} \text{ lb}$$

$$F_R = \sqrt{(-103.05)^2 + (-42.57)^2} = 111 \text{ lb} \quad \textbf{Ans}$$

$$\theta' = \tan^{-1}\left(\frac{42.57}{103.05}\right) = 22.4°$$

$$\theta = 180° + 22.4° = 202° \quad \textbf{Ans}$$



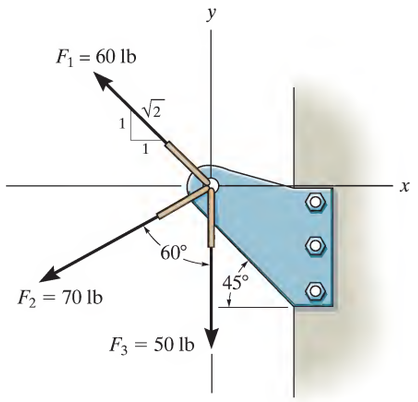

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–50. The three forces are applied to the bracket. Determine the range of values for the magnitude of force **P** so that the resultant of the three forces does not exceed 2400 N.

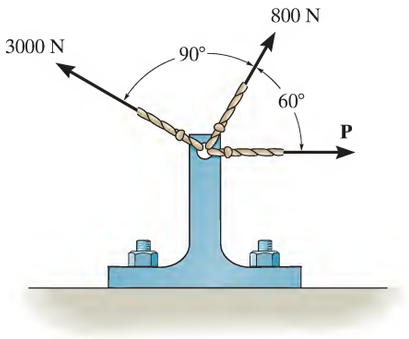

$\rightarrow F_{Rx} = \Sigma F_x;\quad F_{Rx} = P + 800\cos 60° - 3000\cos 30° = P - 2198.08$

$+\uparrow F_{Ry} = \Sigma F_y;\quad F_{Ry} = 800\sin 60° + 3000\sin 30° = 2192.82$

$$F_R = \sqrt{(P - 2198.08)^2 + (2192.82)^2} \le 2400$$

$$(P - 2198.08)^2 + (2192.82)^2 \le (2400)^2$$

$$|(P - 2198.08)| \le 975.47$$

$$-975.47 \le P - 2198.08 \le 975.47$$

$$1222.6\ \text{N} \le P \le 3173.5\ \text{N}$$

$$1.22\ \text{kN} \le P \le 3.17\ \text{kN}$$ Ans

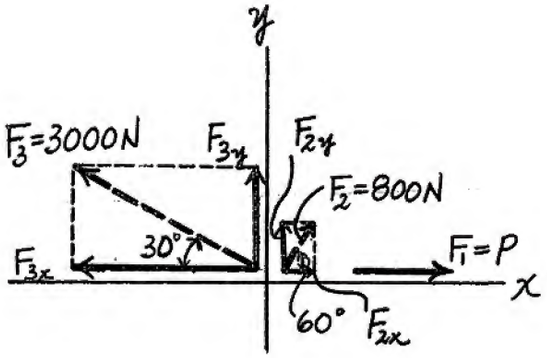

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–51. If $F_1 = 150$ N and $\phi = 30°$, determine the magnitude of the resultant force acting on the bracket and its direction measured clockwise from the positive x axis.

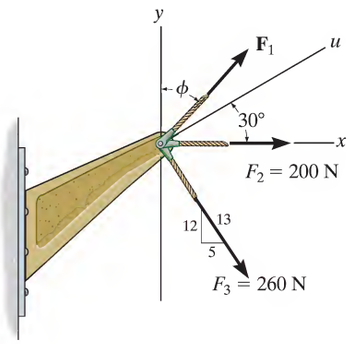

Rectangular Components: By referring to Fig. *a*, the x and y components of $\mathbf{F}_1$, $\mathbf{F}_2$, and $\mathbf{F}_3$ can be written as

$$(F_1)_x = 150\sin 30° = 75\,\text{N} \qquad (F_1)_y = 150\cos 30° = 129.90\,\text{N}$$
$$(F_2)_x = 200\,\text{N} \qquad (F_2)_y = 0$$
$$(F_3)_x = 260\left(\frac{5}{13}\right) = 100\,\text{N} \qquad (F_3)_y = 260\left(\frac{12}{13}\right) = 240\,\text{N}$$

Resultant Force: Summing the force components algebraically along the x and y axes,

$$\stackrel{+}{\rightarrow}\Sigma(F_R)_x = \Sigma F_x; \quad (F_R)_x = 75 + 200 + 100 = 375\,\text{N} \rightarrow$$
$$+\uparrow \Sigma(F_R)_y = \Sigma F_y; \quad (F_R)_y = 129.90 - 240 = -110.10\,\text{N} = 110.01\,\text{N} \downarrow$$

The magnitude of the resultant force $\mathbf{F}_R$ is

$$F_R = \sqrt{(F_R)_x^2 + (F_R)_y^2} = \sqrt{375^2 + 110.10^2} = 391\,\text{N} \qquad \textbf{Ans.}$$

The direction angle θ of $\mathbf{F}_R$, Fig. *b*, measured clockwise from the positive x axis, is

$$\theta = \tan^{-1}\left[\frac{(F_R)_y}{(F_R)_x}\right] = \tan^{-1}\left(\frac{110.10}{375}\right) = 16.4° \qquad \textbf{Ans.}$$

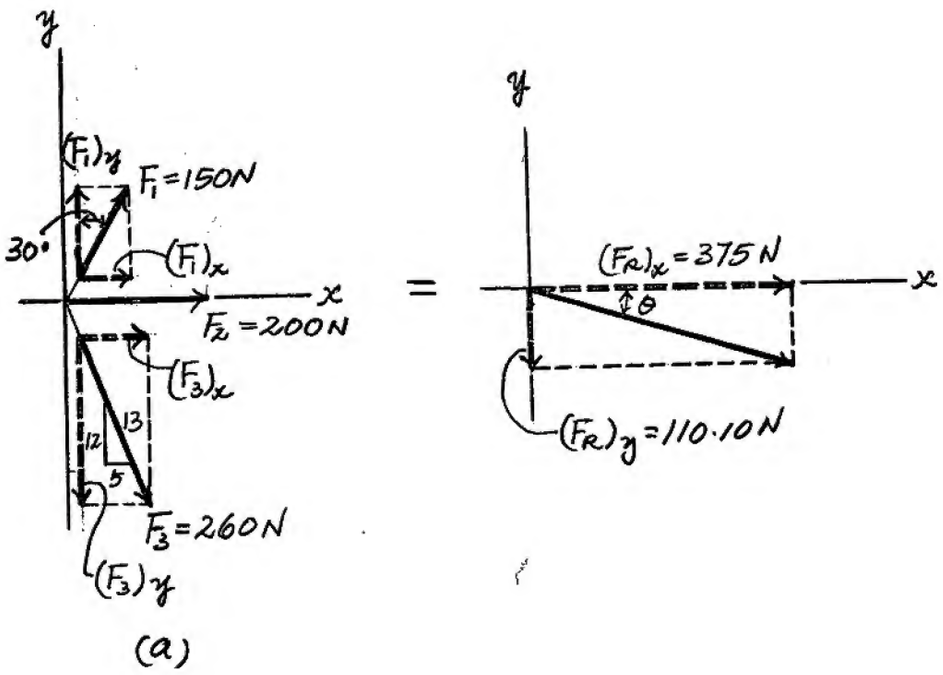

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***2–52.** If the magnitude of the resultant force acting on the bracket is to be 450 N directed along the positive u axis, determine the magnitude of $\mathbf{F}_1$ and its direction ϕ.



Rectangular Components: By referring to Fig. *a*, the x and y components of $\mathbf{F}_1$, $\mathbf{F}_2$, $\mathbf{F}_3$, and $\mathbf{F}_R$ can be written as

$$(F_1)_x = F_1 \sin\phi \qquad (F_1)_y = F_1 \cos\phi$$

$$(F_2)_x = 200\,\text{N} \qquad (F_2)_y = 0$$

$$(F_3)_x = 260\left(\frac{5}{13}\right) = 100\,\text{N} \qquad (F_3)_y = 260\left(\frac{12}{13}\right) = 240\,\text{lb}$$

$$(F_R)_x = 450\cos 30° = 389.71\,\text{N} \qquad (F_R)_y = 450\sin 30° = 225\,\text{lb}$$

Resultant Force: Summing the force components algebraically along the x and y axes,

$$\overset{+}{\rightarrow}\Sigma(F_R)_x = \Sigma F_x; \quad 389.71 = F_1\sin\phi + 200 + 100$$

$$F_1\sin\phi = 89.71 \qquad (1)$$

$$+\uparrow \Sigma(F_R)_y = \Sigma F_y; \quad 225 = F_1\cos\phi - 240$$

$$F_1\cos\phi = 465 \qquad (2)$$

Solving Eqs. (1) and (2), yields

$$\phi = 10.9° \qquad F_1 = 474\,\text{N} \qquad \textbf{Ans.}$$

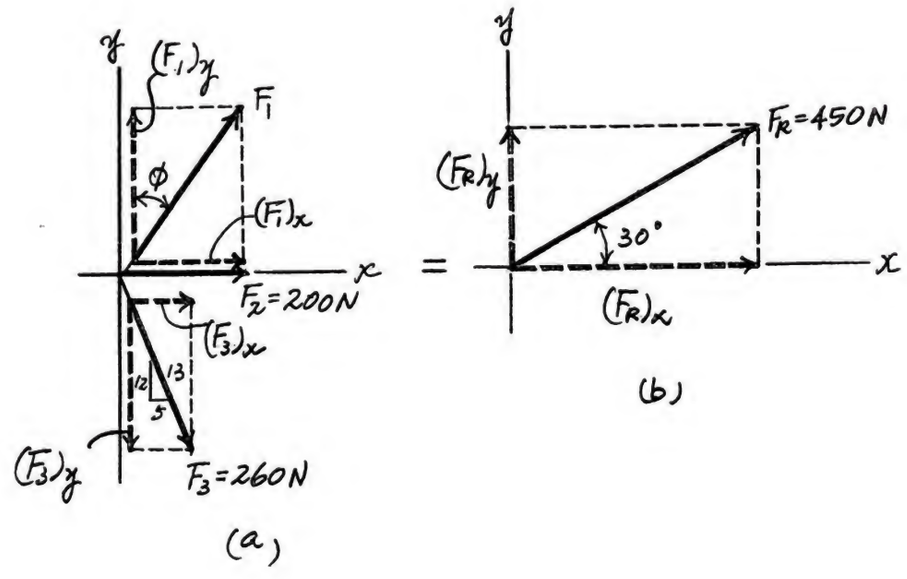

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–53. If the resultant force acting on the bracket is required to be a minimum, determine the magnitudes of $\mathbf{F}_1$ and the resultant force. Set $\phi = 30°$.

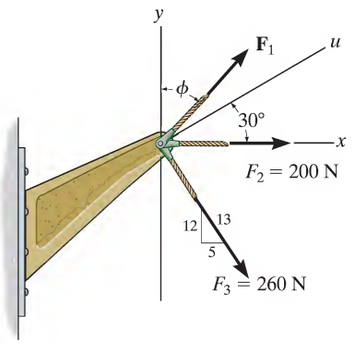

Rectangular Components: By referring to Fig. *a*, the *x* and *y* components of $\mathbf{F}_1$, $\mathbf{F}_2$, and $\mathbf{F}_3$ can be written as

$$(F_1)_x = F_1 \sin 30° = 0.5F_1 \qquad (F_1)_y = F_1 \cos 30° = 0.8660F_1$$
$$(F_2)_x = 200\,\text{N} \qquad (F_2)_y = 0$$
$$(F_3)_x = 260\left(\frac{5}{13}\right) = 100\,\text{N} \qquad (F_3)_y = 260\left(\frac{12}{13}\right) = 240\,\text{N}$$

Resultant Force: Summing the force components algebraically along the *x* and *y* axes,

$$\stackrel{+}{\rightarrow}\Sigma(F_R)_x = \Sigma F_x; \quad (F_R)_x = 0.5F_1 + 200 + 100$$
$$= 0.5F_1 + 300$$
$$+\uparrow \Sigma(F_R)_y = \Sigma F_y; \quad (F_R)_y = 0.8660F_1 - 240$$

The magnitude of the resultant force $\mathbf{F}_R$ is

$$F_R = \sqrt{(F_R)_x^2 + (F_R)_y^2}$$
$$= \sqrt{(0.5F_1 + 300)^2 + (0.8660F_1 - 240)^2}$$
$$= \sqrt{F_1^2 - 115.69F_1 + 147600} \qquad (1)$$

Thus,

$$F_R^2 = F_1^2 - 115.69F_1 + 147\,600 \qquad (2)$$

The first derivative of Eq. (2) is

$$2F_R \frac{dF_R}{dF_1} = 2F_1 - 115.69 \qquad (3)$$

and the second derivative of Eq. (1) is

$$F_R \frac{d^2F_R}{dF_1^2} + \frac{dF_R}{dF_1}\frac{dF_R}{dF_1} = 1 \qquad (4)$$

For $\mathbf{F}_R$ to be minimum, $\frac{dF_R}{dF_1} = 0$. Thus, from Eq. (3)

$$2F_R \frac{dF_R}{dF_1} = 2F_1 - 115.69 = 0$$
$$F_1 = 57.84\,\text{N} = 57.8\,\text{N} \qquad \textbf{Ans.}$$

Substituting $F_1 = 57.84$ N and $\frac{dF_R}{dF_1} = 0$ into Eq. (4),

$$\frac{d^2F_R}{dF_1^2} = 0.00263 > 0$$

Thus, $F_1 = 57.84$ N produces a minimum $\mathbf{F}_R$. From Eq. (1),

$$F_R = \sqrt{(57.84)^2 - 115.69(57.84) + 147600} = 380\,\text{N} \qquad \textbf{Ans.}$$

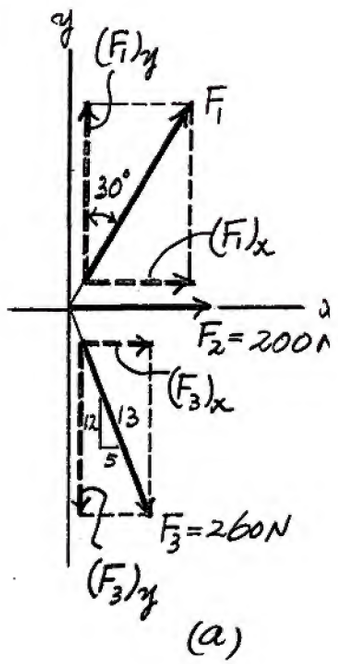

(a)

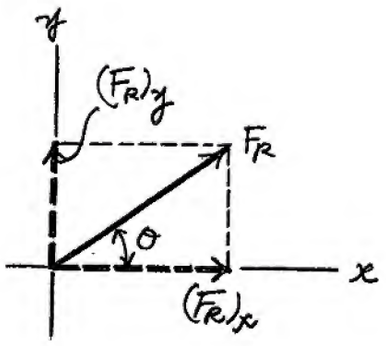

(b)

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–54. Three forces act on the bracket. Determine the magnitude and direction θ of $\mathbf{F}_2$ so that the resultant force is directed along the positive u axis and has a magnitude of 50 lb.

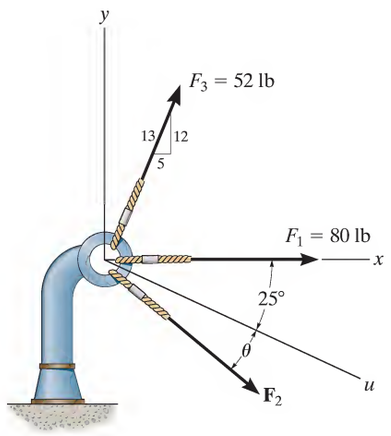

Scalar Notation : Suming the force components algebraically, we have

$$\stackrel{+}{\rightarrow} F_{R_x} = \Sigma F_x; \quad 50\cos 25° = 80 + 52\left(\frac{5}{13}\right) + F_2\cos(25° + \theta)$$

$$F_2\cos(25° + \theta) = -54.684 \qquad [1]$$

$$+\uparrow F_{R_y} = \Sigma F_y; \quad -50\sin 25° = 52\left(\frac{12}{13}\right) - F_2\sin(25° + \theta)$$

$$F_2\sin(25° + \theta) = 69.131 \qquad [2]$$

Solving Eq. [1] and [2] yields

$$25° + \theta = 128.35° \qquad \theta = 103° \qquad \textbf{Ans}$$

$$F_2 = 88.1 \text{ lb} \qquad \textbf{Ans}$$

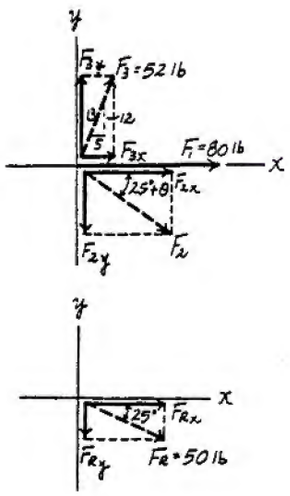

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–55. If $F_2 = 150$ lb and $\theta = 55°$, determine the magnitude and direction measured clockwise from the positive x axis of the resultant force of the three forces acting on the bracket.

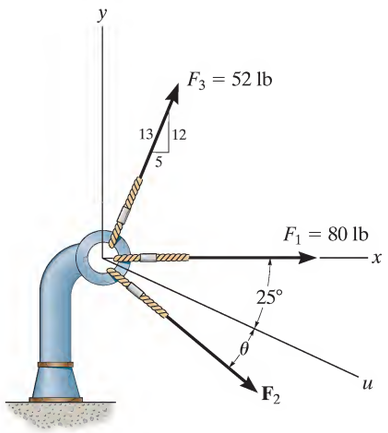

Scalar Notation : Suming the force components algebraically, we have

$$\stackrel{+}{\rightarrow} F_{R_x} = \Sigma F_x; \quad F_{R_x} = 80 + 52\left(\frac{5}{13}\right) + 150\cos 80°$$
$$= 126.05 \text{ lb} \rightarrow$$

$$+\uparrow F_{R_y} = \Sigma F_y; \quad F_{R_y} = 52\left(\frac{12}{13}\right) - 150\sin 80°$$
$$= -99.72 \text{ lb} = 99.72 \text{ lb} \downarrow$$

The magnitude of the resultant force $\mathbf{F}_R$ is

$$F_R = \sqrt{F_{R_x}^2 + F_{R_y}^2} = \sqrt{126.05^2 + 99.72^2} = 161 \text{ lb} \quad \textbf{Ans}$$

The directional angle θ measured clockwise from positive x axis is

$$\theta = \tan^{-1}\frac{F_{R_y}}{F_{R_x}} = \tan^{-1}\left(\frac{99.72}{126.05}\right) = 38.3° \quad \textbf{Ans}$$

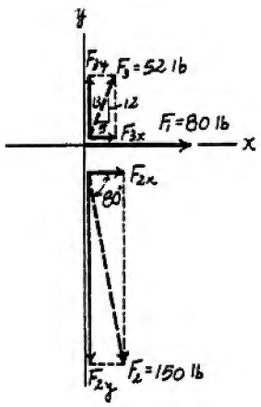



***2–56.** The three concurrent forces acting on the post produce a resultant force $\mathbf{F}_R = \mathbf{0}$. If $F_2 = \frac{1}{2}F_1$, and $\mathbf{F}_1$ is to be 90° from $\mathbf{F}_2$ as shown, determine the required magnitude of F_3 expressed in terms of F_1 and the angle θ.

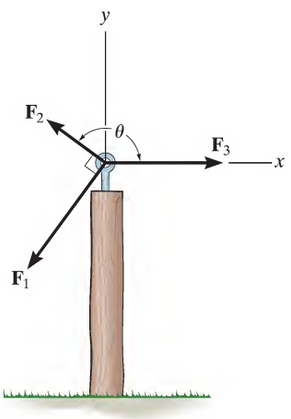

$$\Sigma F_{Rx'} = 0; \quad F_3\cos(\theta - 90°) = F_1$$

$$\Sigma F_{Ry'} = 0; \quad F_3\sin(\theta - 90°) = F_2$$



$$\tan(\theta - 90°) = \frac{F_2}{F_1} = \frac{1}{2}$$

$$\theta - 90° = 26.57°$$

$$\theta = 116.57° = 117° \quad \textbf{Ans}$$

$$F_3 = \frac{F_1}{\cos(116.57° - 90°)}$$

$$F_3 = 1.12F_1 \quad \textbf{Ans}$$

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–57. Determine the magnitude of force **F** so that the resultant force of the three forces is as small as possible. What is the magnitude of this smallest resultant force?



$\rightarrow F_{R_x} = \Sigma F_x; \quad F_{R_x} = 8 - F\cos 45° - 14\cos 30°$

$= -4.1244 - F\cos 45°$

$+\uparrow F_{R_y} = \Sigma F_y; \quad F_{R_y} = -F\sin 45° + 14\sin 30°$

$= 7 - F\sin 45°$

$F_R^2 = (-4.1244 - F\cos 45°)^2 + (7 - F\sin 45°)^2 \qquad (1)$

$2F_R\frac{dF_R}{dF} = 2(-4.1244 - F\cos 45°)(-\cos 45°) + 2(7 - F\sin 45°)(-\sin 45°) = 0$

$F = 2.03\ \text{kN}$ Ans

From Eq. (1): $F_R = 7.87\ \text{kN}$ Ans

Also, from the figure require

$(F_R)_{x'} = 0 = \Sigma F_{x'}; \quad F + 14\sin 15° - 8\cos 45° = 0$

$F = 2.03\ \text{kN}$ Ans

$(F_R)_{y'} = \Sigma F_{y'}; \quad F_R = 14\cos 15° - 8\sin 45°$

$F_R = 7.87\ \text{kN}$ Ans

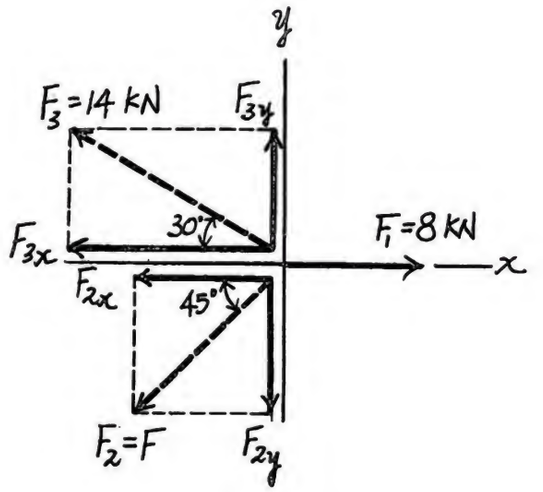

(a)

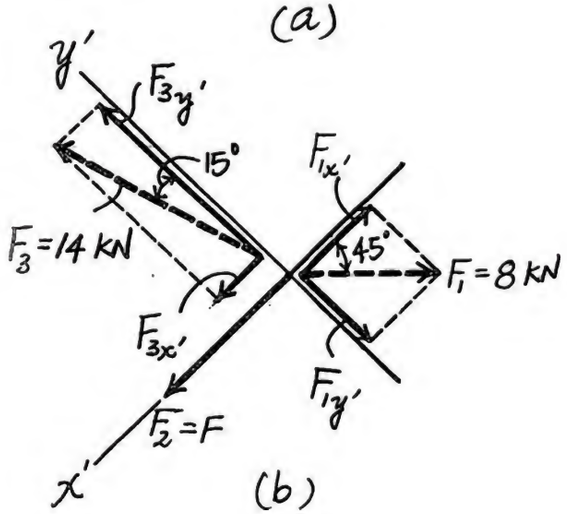

(b)

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–58. Express each of the three forces acting on the bracket in Cartesian vector form with respect to the x and y axes. Determine the magnitude and direction θ of $\mathbf{F}_1$ so that the resultant force is directed along the positive x' axis and has a magnitude of $F_R = 600$ N.

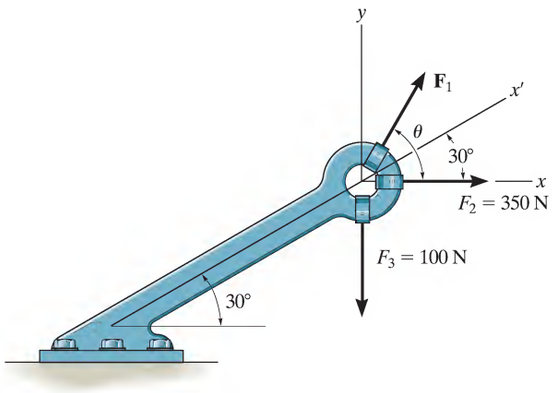

$\mathbf{F}_1 = \{F_1 \cos\theta\,\mathbf{i} + F_1 \sin\theta\,\mathbf{j}\}$ N **Ans**

$\mathbf{F}_2 = \{350\mathbf{i}\}$ N **Ans**

$\mathbf{F}_3 = \{-100\mathbf{j}\}$ N **Ans**

Require,

$\mathbf{F}_R = 600\cos 30°\,\mathbf{i} + 600\sin 30°\,\mathbf{j}$

$\mathbf{F}_R = \{519.6\mathbf{i} + 300\mathbf{j}\}$ N

$\mathbf{F}_R = \Sigma\mathbf{F}$

Equating the **i** and **j** components yields:

$519.6 = F_1 \cos\theta + 350$

$F_1 \cos\theta = 169.6$

$300 = F_1 \sin\theta - 100$

$F_1 \sin\theta = 400$

$\theta = \tan^{-1}\left[\frac{400}{169.6}\right] = 67.0°$ **Ans**

$F_1 = 434$ N **Ans**

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–59. Determine the coordinate angle γ for $\mathbf{F}_2$ and then express each force acting on the bracket as a Cartesian vector.

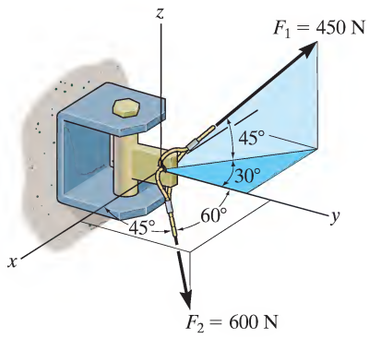

Rectangular Components: Since $\cos^2\alpha_2 + \cos^2\beta_2 + \cos^2\gamma_2 = 1$, then $\cos\gamma_{2z} = \pm\sqrt{1 - \cos^2 45° - \cos^2 60°} = \pm 0.5$. However, it is required that $\gamma_2 > 90°$, thus, $\gamma_2 = \cos^{-1}(-0.5) = 120°$. By resolving $\mathbf{F}_1$ and $\mathbf{F}_2$ into their x, y, and z components, as shown in Figs. *a* and *b*, respectively $\mathbf{F}_1$ and $\mathbf{F}_2$ can be expressed in Cartesian vector form as

$$\mathbf{F}_1 = 450\cos 45°\sin 30°(-\mathbf{i}) + 450\cos 45°\cos 30°(+\mathbf{j}) + 450\sin 45°(+\mathbf{k})$$
$$= \{-159\mathbf{i} + 276\mathbf{j} + 318\mathbf{k}\}\text{N} \quad \textbf{Ans.}$$

$$\mathbf{F}_2 = 600\cos 45°\mathbf{i} + 600\cos 60°\mathbf{j} + 600\cos 120°\mathbf{k}$$
$$= \{424\mathbf{i} + 300\mathbf{j} - 300\mathbf{k}\}\text{ N} \quad \textbf{Ans.}$$

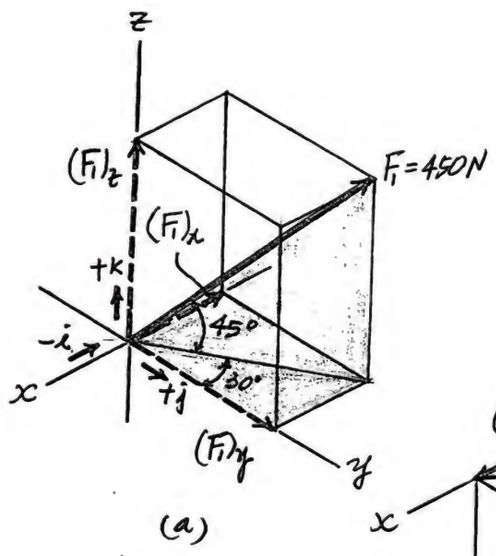

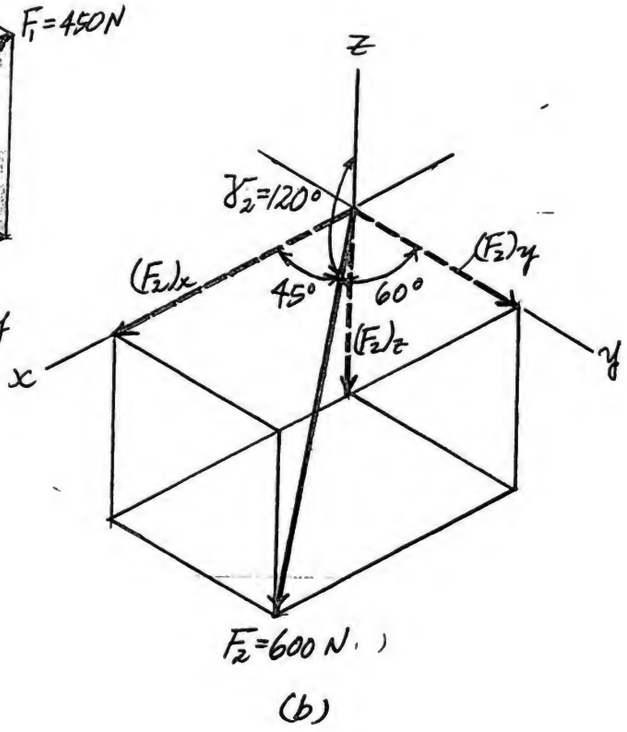

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***2–60.** Determine the magnitude and coordinate direction angles of the resultant force acting on the bracket.

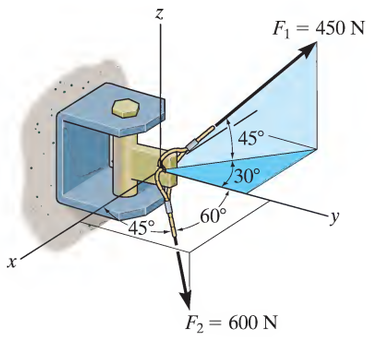

Rectangular Components: Since $\cos^2\alpha_2 + \cos^2\beta_2 + \cos^2\gamma_2 = 1$, then $\cos\gamma_{2z} = \pm\sqrt{1 - \cos^2 45° - \cos^2 60°} = \pm 0.5$. However, it is required that $\alpha_2 > 90°$, thus, $\gamma_2 = \cos^{-1}(-0.5) = 120°$. By resolving $\mathbf{F}_1$ and $\mathbf{F}_2$ into their x, y, and z components, as shown in Figs. a and b, respectively, $\mathbf{F}_1$ and $\mathbf{F}_2$, can be expressed in Cartesian vector form, as

$$\mathbf{F}_1 = 450\cos 45°\sin 30°(-\mathbf{i}) + 450\cos 45°\cos 30°(+\mathbf{j}) + 450\sin 45°(+\mathbf{k})$$
$$= \{-159.10\mathbf{i} + 275.57\mathbf{j} + 318.20\mathbf{k}\}\text{N} \quad \textbf{Ans.}$$
$$\mathbf{F}_2 = 600\cos 45°\mathbf{i} + 600\cos 60°\mathbf{j} + 600\cos 120°\mathbf{k}$$
$$= \{424\mathbf{i} + 300\mathbf{j} - 300\mathbf{k}\}\text{ N} \quad \textbf{Ans.}$$

Resultant Force: By adding $\mathbf{F}_1$ and $\mathbf{F}_2$ vectorally, we obtain $\mathbf{F}_R$.

$$\mathbf{F}_R = \mathbf{F}_1 + \mathbf{F}_2$$
$$= (-159.10\mathbf{i} + 275.57\mathbf{j} + 318.20\mathbf{k}) + (424.26\mathbf{i} + 300\mathbf{j} - 300\mathbf{k})$$
$$= \{265.16\mathbf{i} + 575.57\mathbf{j} + 18.20\mathbf{k}\}\text{ N}$$

The magnitude of $\mathbf{F}_R$ is

$$F_R = \sqrt{(F_R)_x^2 + (F_R)_y^2 + (F_R)_z^2}$$
$$= \sqrt{265.16^2 + 575.57^2 + 18.20^2} = 633.97\text{ N} = 634\text{ N} \quad \textbf{Ans.}$$

The coordinate direction angles of $\mathbf{F}_R$ are

$$\alpha = \cos^{-1}\left[\frac{(F_R)_x}{F_R}\right] = \cos^{-1}\left(\frac{265.16}{633.97}\right) = 65.3° \quad \textbf{Ans.}$$
$$\beta = \cos^{-1}\left[\frac{(F_R)_y}{F_R}\right] = \cos^{-1}\left(\frac{575.57}{633.97}\right) = 24.8° \quad \textbf{Ans.}$$
$$\gamma = \cos^{-1}\left[\frac{(F_R)_z}{F_R}\right] = \cos^{-1}\left(\frac{18.20}{633.97}\right) = 88.4° \quad \textbf{Ans.}$$

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–61. Express each force acting on the pipe assembly in Cartesian vector form.

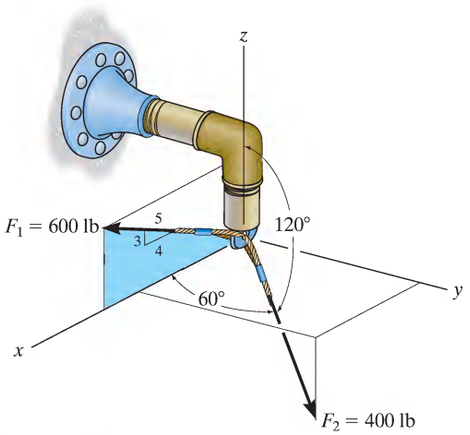

Rectangular Components: Since $\cos^2\alpha_2 + \cos^2\beta_2 + \cos^2\gamma_2 = 1$, then $\cos\beta_2 = \pm\sqrt{1-\cos^2 60° - \cos^2 120°} = \pm 0.7071$. However, it is required that $\beta_2 > 90°$, thus, $\beta_2 = \cos^{-1}(0.7071) = 45°$. By resolving $\mathbf{F}_1$ and $\mathbf{F}_2$ into their x, y, and z components, as shown in Figs. *a* and *b*, respectively, $\mathbf{F}_1$ and $\mathbf{F}_2$, can be expressed in Cartesian vector form, as

$$\mathbf{F}_1 = 600\left(\frac{4}{5}\right)(+\mathbf{i}) + 0\mathbf{j} + 600\left(\frac{3}{5}\right)(+\mathbf{k})$$

$$= [480\mathbf{i} + 360\mathbf{k}]\,\text{N} \qquad \textbf{Ans.}$$

$$\mathbf{F}_2 = 400\cos 60°\,\mathbf{i} + 400\cos 45°\,\mathbf{j} + 400\cos 120°\,\mathbf{k}$$

$$= [200\mathbf{i} + 283\mathbf{j} - 200\mathbf{k}]\,\text{N} \qquad \textbf{Ans.}$$

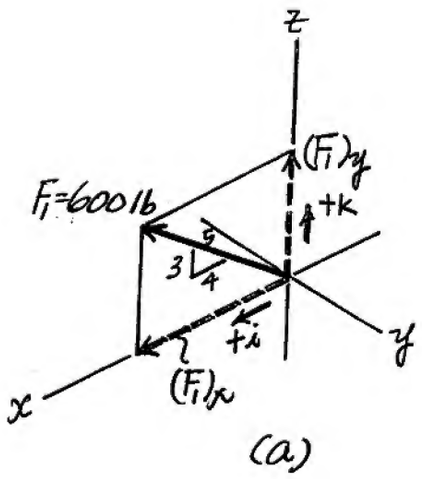

(a)

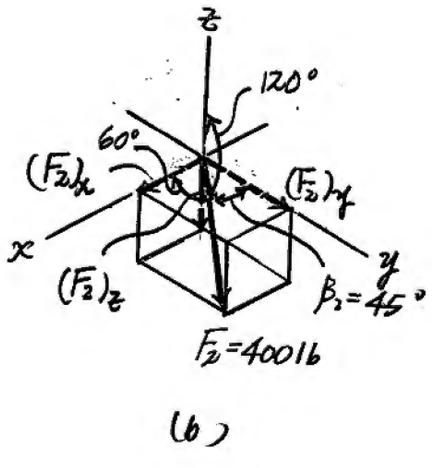

(b)

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–62. Determine the magnitude and direction of the resultant force acting on the pipe assembly.

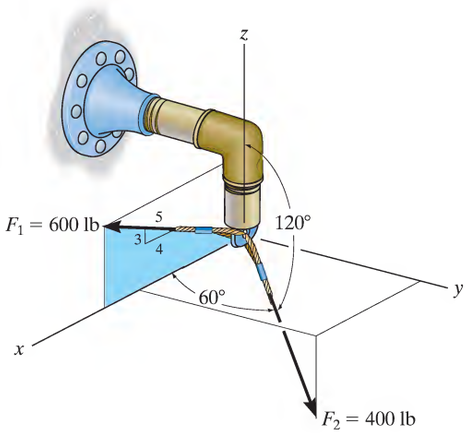

Force Vectors: Since $\cos^2\alpha_2+\cos^2\beta_2+\cos^2\gamma_2=1$, then $\cos\gamma_2=\pm\sqrt{1-\cos^2 60°-\cos^2 120°}=\pm 0.7071$. However, it is required that $\gamma_2<90°$, thus, $\gamma_2=\cos^{-1}(0.7071)=45°$. By resolving $\mathbf{F}_1$ and $\mathbf{F}_2$ into their x, y, and z components, as shown in Figs. a and b, respectively, $\mathbf{F}_1$ and $\mathbf{F}_2$, can be expressed in Cartesian vector form, as

$$\mathbf{F}_1 = 600\left(\frac{4}{5}\right)(+\mathbf{i})+0\mathbf{j}+600\left(\frac{3}{5}\right)(+\mathbf{k})$$
$$=\{480\mathbf{i}+360\mathbf{k}\}\ \text{lb}$$
$$\mathbf{F}_2 = 400\cos 60°\,\mathbf{i}+400\cos 45°\,\mathbf{j}+400\cos 120°\,\mathbf{k}$$
$$=\{200\mathbf{i}+282.84\mathbf{j}-200\mathbf{k}\}\ \text{lb}$$

Resultant Force: By adding $\mathbf{F}_1$ and $\mathbf{F}_2$ vectorally, we obtain $\mathbf{F}_R$.

$$\mathbf{F}_R=\mathbf{F}_1+\mathbf{F}_2$$
$$=(480\mathbf{i}+360\mathbf{k})+(200\mathbf{i}+282.84\mathbf{j}-200\mathbf{k})$$
$$=\{680\mathbf{i}+282.84\mathbf{j}+160\mathbf{k}\}\ \text{lb}$$

The magnitude of $\mathbf{F}_R$ is

$$F_R=\sqrt{(F_R)_x^2+(F_R)_y^2+(F_R)_z^2}$$
$$=\sqrt{680^2+282.84^2+160^2}=753.66\ \text{lb}=754\ \text{lb}\qquad\textbf{Ans.}$$

The coordinate direction angles of $\mathbf{F}_R$ are

$$\alpha=\cos^{-1}\left[\frac{(F_R)_x}{F_R}\right]=\cos^{-1}\left(\frac{680}{753.66}\right)=25.5°\qquad\textbf{Ans.}$$

$$\beta=\cos^{-1}\left[\frac{(F_R)_y}{F_R}\right]=\cos^{-1}\left(\frac{282.84}{753.66}\right)=68.0°\qquad\textbf{Ans.}$$

$$\gamma=\cos^{-1}\left[\frac{(F_R)_z}{F_R}\right]=\cos^{-1}\left(\frac{160}{753.66}\right)=77.7°\qquad\textbf{Ans.}$$

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–63. The force **F** acts on the bracket within the octant shown. If $F = 400$ N, $\beta = 60°$, and $\gamma = 45°$, determine the x, y, z components of **F**.



Coordinate Direction Angles: Since β and γ are known, the third angle α can be determined from

$$\cos^2\alpha + \cos^2\beta + \cos^2\gamma = 1$$
$$\cos^2\alpha + \cos^2 60° + \cos^2 45° = 1$$
$$\cos\alpha = \pm 0.5$$

Since **F** is in the octant shown in Fig. *a*, θ_x must be greater than 90°. Thus, $\alpha = \cos^{-1}(-0.5) = 120°$.

Rectangular Components: By referring to Fig. *a*, the x, y, and z components of **F** can be written as

$$F_x = F\cos\alpha = 400\cos 120° = -200\,\text{N} \quad \textbf{Ans.}$$
$$F_y = F\cos\beta = 400\cos 60° = 200\,\text{N} \quad \textbf{Ans.}$$
$$F_z = F\cos\gamma = 400\cos 45° = 283\,\text{N} \quad \textbf{Ans.}$$

The negative sign indicates that $\mathbf{F}_x$ is directed towards the negative x axis.

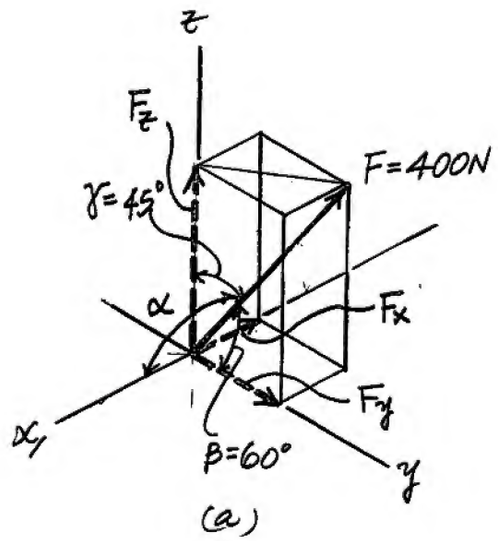

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***2–64.** The force **F** acts on the bracket within the octant shown. If the magnitudes of the x and z components of **F** are $F_x = 300$ N and $F_z = 600$ N, respectively, and $\beta = 60°$, determine the magnitude of **F** and its y component. Also, find the coordinate direction angles α and γ.



Rectangular Components: The magnitude of **F** is given by

$$F = \sqrt{F_x^2 + F_y^2 + F_z^2}$$

$$F = \sqrt{300^2 + F_y^2 + 600^2}$$

$$F^2 = F_y^2 + 450\,000 \qquad (1)$$

The magnitude of $\mathbf{F}_y$ is given by

$$F_y = F\cos 60° = 0.5F \qquad (2)$$

Solving Eqs. (1) and (2) yields

$$F = 774.60\text{ N} = 775\text{ N} \qquad \textbf{Ans.}$$

$$F_y = 387\text{ N} \qquad \textbf{Ans.}$$

Coordinate Direction Angles: Since **F** is contained in the octant so that $\mathbf{F}_x$ is directed towards the negative x axis, the coordinate direction angle θ_x is given by

$$\alpha = \cos^{-1}\left(\frac{-F_x}{F}\right) = \cos^{-1}\left(\frac{-300}{774.60}\right) = 113° \qquad \textbf{Ans.}$$

The third coordinate direction angle is

$$\gamma = \cos^{-1}\left(\frac{-F_z}{F}\right) = \cos^{-1}\left(\frac{600}{774.60}\right) = 39.2° \qquad \textbf{Ans.}$$

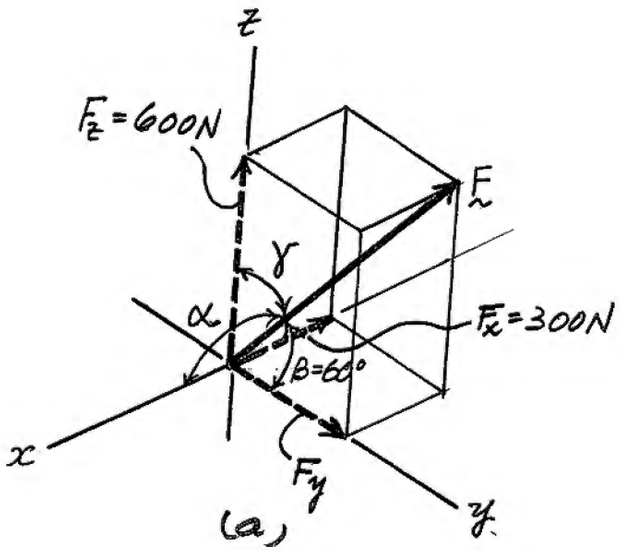

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–65. The two forces $\mathbf{F}_1$ and $\mathbf{F}_2$ acting at A have a resultant force of $\mathbf{F}_R = \{-100\mathbf{k}\}$ lb. Determine the magnitude and coordinate direction angles of $\mathbf{F}_2$.

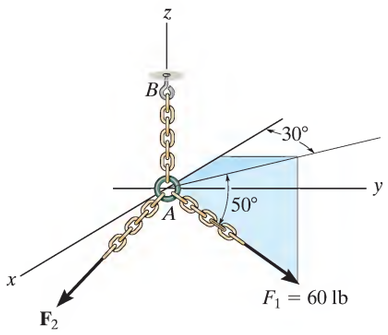

Cartesian Vector Notation :

$$\mathbf{F}_R = \{-100\mathbf{k}\}\ \text{lb}$$

$$\mathbf{F}_1 = 60\{-\cos 50°\cos 30°\mathbf{i} + \cos 50°\sin 30°\mathbf{j} - \sin 50°\mathbf{k}\}\ \text{lb}$$
$$= \{-33.40\mathbf{i} + 19.28\mathbf{j} - 45.96\mathbf{k}\}\ \text{lb}$$

$$\mathbf{F}_2 = \{F_{2_x}\mathbf{i} + F_{2_y}\mathbf{j} + F_{2_z}\mathbf{k}\}\ \text{lb}$$

Resultant Force :

$$\mathbf{F}_R = \mathbf{F}_1 + \mathbf{F}_2$$
$$-100\mathbf{k} = \{(F_{2_x} - 33.40)\mathbf{i} + (F_{2_y} + 19.28)\mathbf{j} + (F_{2_z} - 45.96)\mathbf{k}\}$$

Equating **i**, **j** and **k** components, we have

$$F_{2_x} - 33.40 = 0 \qquad F_{2_x} = 33.40\ \text{lb}$$
$$F_{2_y} + 19.28 = 0 \qquad F_{2_y} = -19.28\ \text{lb}$$
$$F_{2_z} - 45.96 = -100 \qquad F_{2_z} = -54.04\ \text{lb}$$

The magnitude of force $\mathbf{F}_2$ is

$$F_2 = \sqrt{F_{2_x}^2 + F_{2_y}^2 + F_{2_z}^2}$$
$$= \sqrt{33.40^2 + (-19.28)^2 + (-54.04)^2}$$
$$= 66.39\ \text{lb} = 66.4\ \text{lb} \qquad \textbf{Ans}$$

The coordinate direction angles for $\mathbf{F}_2$ are

$$\cos\alpha = \frac{F_{2_x}}{F_2} = \frac{33.40}{66.39} \qquad \alpha = 59.8° \qquad \textbf{Ans}$$
$$\cos\beta = \frac{F_{2_y}}{F_2} = \frac{-19.28}{66.39} \qquad \beta = 107° \qquad \textbf{Ans}$$
$$\cos\gamma = \frac{F_{2_z}}{F_2} = \frac{-54.04}{66.39} \qquad \gamma = 144° \qquad \textbf{Ans}$$

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–66. Determine the coordinate direction angles of the force $\mathbf{F}_1$ and indicate them on the figure.

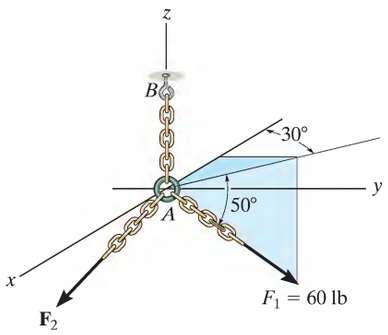

Unit Vector For Force $\mathbf{F}_1$ **:**

$$\mathbf{u}_{F_1} = -\cos 50°\cos 30°\mathbf{i} + \cos 50°\sin 30°\mathbf{j} - \sin 50°\mathbf{k}$$
$$= -0.5567\mathbf{i} + 0.3214\mathbf{j} - 0.7660\mathbf{k}$$

Coordinate Direction Angles : From the unit vector obtained above, we have

$\cos\alpha = -0.5567$	$\alpha = 124°$	Ans
$\cos\beta = 0.3214$	$\beta = 71.3°$	Ans
$\cos\gamma = -0.7660$	$\gamma = 140°$	Ans

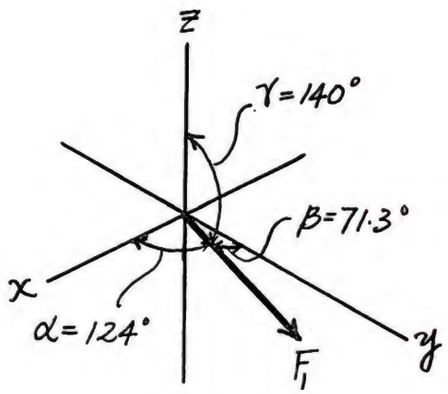

2–67. The spur gear is subjected to the two forces caused by contact with other gears. Express each force as a Cartesian vector.

$$\mathbf{F}_1 = \frac{7}{25}(50)\mathbf{j} - \frac{24}{25}(50)\mathbf{k} = \{14.0\,\mathbf{j} - 48.0\mathbf{k}\}\ \text{lb} \qquad \text{Ans}$$

$$\mathbf{F}_2 = 180\cos 60°\mathbf{i} + 180\cos 135°\mathbf{j} + 180\cos 60°\mathbf{k}$$
$$= \{90\mathbf{i} - 127\mathbf{j} + 90\mathbf{k}\}\ \text{lb} \qquad \text{Ans}$$

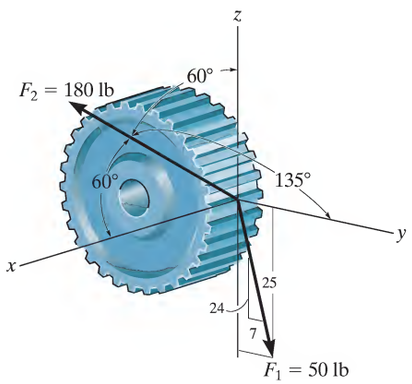

***2–68.** The spur gear is subjected to the two forces caused by contact with other gears. Determine the resultant of the two forces and express the result as a Cartesian vector.

$$F_{Rx} = 180\cos 60° = 90$$

$$F_{Ry} = \frac{7}{25}(50) + 180\cos 135° = -113$$

$$F_{Rz} = -\frac{24}{25}(50) + 180\cos 60° = 42$$

$$\mathbf{F}_R = \{90\mathbf{i} - 113\mathbf{j} + 42\mathbf{k}\}\ \text{lb} \qquad \text{Ans}$$

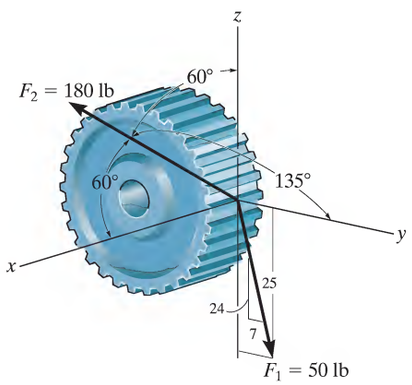

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–69. If the resultant force acting on the bracket is $\mathbf{F}_R = \{-300\mathbf{i} + 650\mathbf{j} + 250\mathbf{k}\}$ N, determine the magnitude and coordinate direction angles of $\mathbf{F}$.

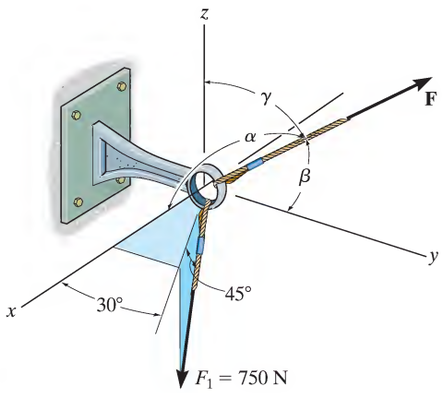

Force Vectors: By resolving $\mathbf{F}_1$ and $\mathbf{F}_2$ into their x, y, and z components, as shown in Fig. *a*.

$\mathbf{F}_1$ and $\mathbf{F}_2$ can be expressed in Cartesian vector form as

$$\mathbf{F}_1 = 750\cos 45°\cos 30°(+\mathbf{i}) + 750\cos 45°\sin 30°(+\mathbf{j}) + 750\sin 45°(-\mathbf{k})$$
$$= [459.28\mathbf{i} + 265.17\mathbf{j} - 530.33\mathbf{k}]\text{N}$$
$$\mathbf{F} = F\cos\alpha\mathbf{i} + F\cos\beta\mathbf{j} + F\cos\gamma\mathbf{k}$$

Resultant Force: By adding $\mathbf{F}_1$ and $\mathbf{F}$ vectorally, we obtain $\mathbf{F}_R$. Thus,

$$\mathbf{F}_R = \mathbf{F}_1 + \mathbf{F}$$
$$-300\mathbf{i} + 650\mathbf{j} + 250\mathbf{k} = (459.28\mathbf{i} + 265.17\mathbf{j} - 530.33\mathbf{k}) + (F\cos\theta_x\mathbf{i} + F\cos\theta_y\mathbf{j} + F\cos\theta_z\mathbf{k})$$
$$-300\mathbf{i} + 650\mathbf{j} + 250\mathbf{k} = (459.28 + F\cos\theta_x)\mathbf{i} + (265.17 + F\cos\theta_y)\mathbf{j} + (F\cos\theta_z - 530.33)\mathbf{k}$$

Equating the **i**, **j**, and **k** components,

$$-300 = 459.28 + F\cos\alpha$$
$$F\cos\alpha = -759.28 \qquad (1)$$

$$650 = 265.17 + F\cos\beta$$
$$F\cos\beta = 384.83 \qquad (2)$$

$$250 = F\cos\gamma - 530.33$$
$$F\cos\gamma = 780.33 \qquad (3)$$

Squaring and then adding Eqs. (1), (2), and (3), yields

$$F^2(\cos^2\alpha + \cos^2\beta + \cos^2\gamma) = 1\,333\,518.08 \qquad (4)$$

However, $\cos^2\alpha + \cos^2\beta + \cos^2\gamma = 1$. Thus, from Eq. (4)

$$F = 1154.78\,\text{N} = 1.15\,\text{kN} \qquad \textbf{Ans.}$$

Substituting $F = 1154.78$ N into Eqs. (1), (2), and (3), yields

$$\alpha = 131° \qquad \beta = 70.5° \qquad \gamma = 47.5° \qquad \textbf{Ans.}$$

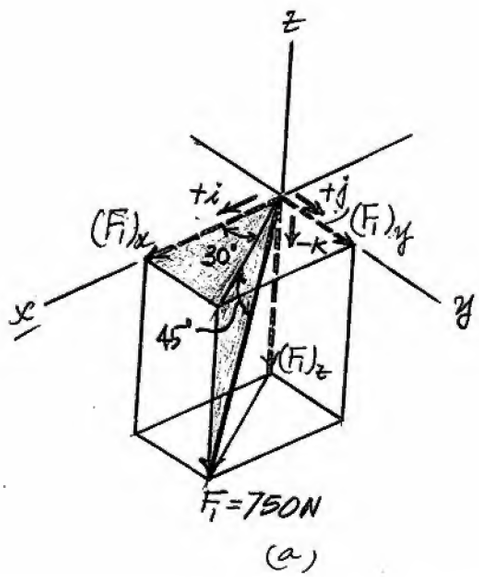

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–70. If the resultant force acting on the bracket is to be $\mathbf{F}_R = \{800\mathbf{j}\}$ N, determine the magnitude and coordinate direction angles of $\mathbf{F}$.

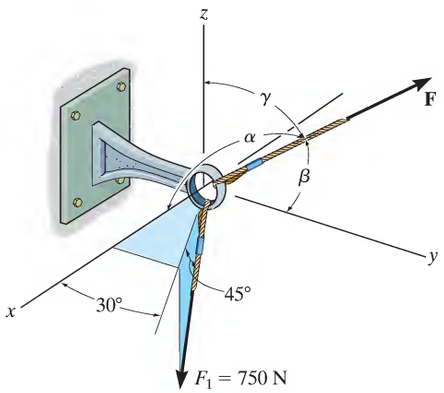

Force Vectors: By resolving $\mathbf{F}_1$ and $\mathbf{F}$ into their x, y, and z components, as shown in Figs. b and c, respectively, $\mathbf{F}_1$ and $\mathbf{F}$ can be expressed in Cartesian vector form as

$$\mathbf{F}_1 = 750\cos 45°\cos 30°(+\mathbf{i}) + 750\cos 45°\sin 30°(+\mathbf{j}) + 750\sin 45°(-\mathbf{k})$$
$$= [459.28\mathbf{i} + 265.17\mathbf{j} - 530.33\mathbf{k}]\text{ N}$$
$$\mathbf{F} = F\cos\alpha\mathbf{i} + F\cos\beta\mathbf{j} + F\cos\gamma\mathbf{k}$$

Resultant Force: By adding $\mathbf{F}_1$ and $\mathbf{F}$ vectorally, Figs. a, b, and c, we obtain $\mathbf{F}_R$. Thus,

$$\mathbf{F}_R = \mathbf{F}_1 + \mathbf{F}$$
$$800\mathbf{j} = (459.28\mathbf{i} + 265.17\mathbf{j} - 530.33\mathbf{k}) + (F\cos\alpha\mathbf{i} + F\cos\beta\mathbf{j} + F\cos\gamma\mathbf{k})$$
$$800\mathbf{j} = (459.28 + F\cos\alpha)\mathbf{i} + (265.17 + F\cos\beta)\mathbf{j} + (F\cos\gamma - 530.33)\mathbf{k}$$

Equating the $\mathbf{i}$, $\mathbf{j}$, and $\mathbf{k}$ components, we have

$$0 = 459.28 + F_2\cos\alpha$$
$$F\cos\alpha = -459.28 \qquad (1)$$

$$800 = 265.17 + F\cos\beta$$
$$F\cos\beta = 534.8 \qquad (2)$$

$$0 = F\cos\gamma - 530.33$$
$$F\cos\gamma = 530.33 \qquad (3)$$

Squaring and then adding Eqs. (1), (2), and (3), yields

$$F^2(\cos^2\alpha + \cos^2\beta + \cos^2\gamma) = 778\,235.93 \qquad (4)$$

However, $\cos^2\alpha + \cos^2\beta + \cos^2\gamma = 1$. Thus, from Eq. (4)

$$F = 882.17\text{ N} = 882\text{ N} \qquad \textbf{Ans.}$$

Substituting $F = 882.17$ N into Eqs. (1), (2), and (3), yields

$$\alpha = 121° \quad \beta = 52.7° \quad \gamma = 53.0° \qquad \textbf{Ans.}$$

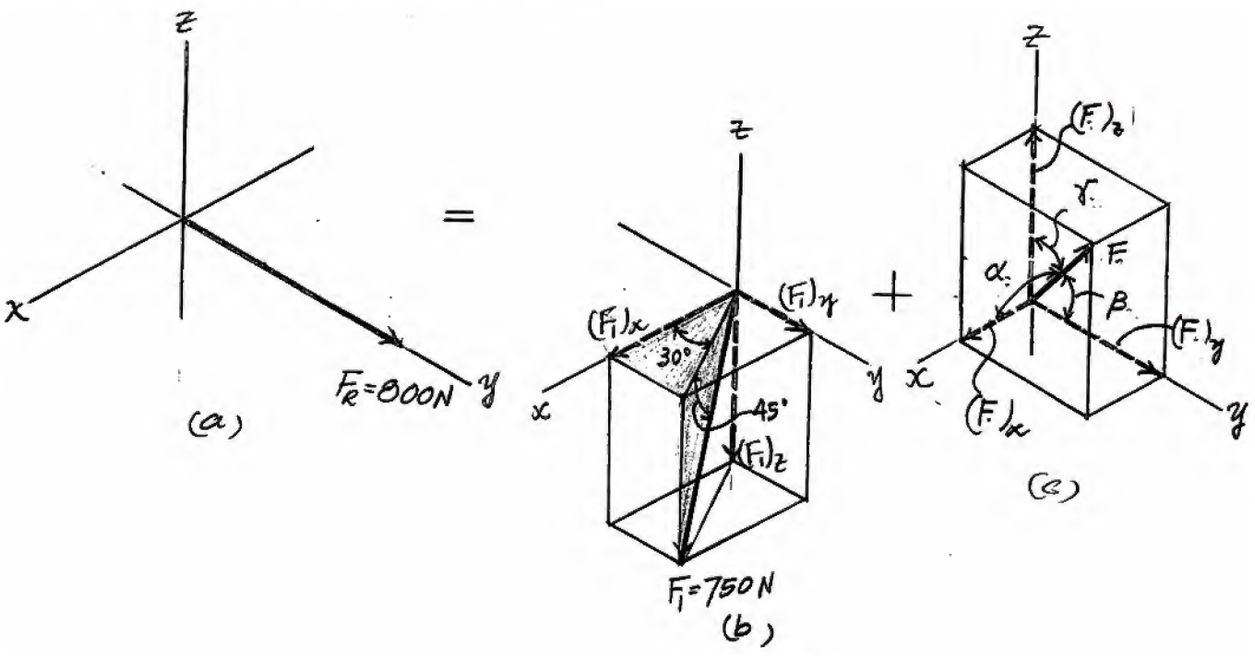

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–71. If $\alpha = 120°$, $\beta < 90°$, $\gamma = 60°$, and $F = 400$ lb, determine the magnitude and coordinate direction angles of the resultant force acting on the hook.

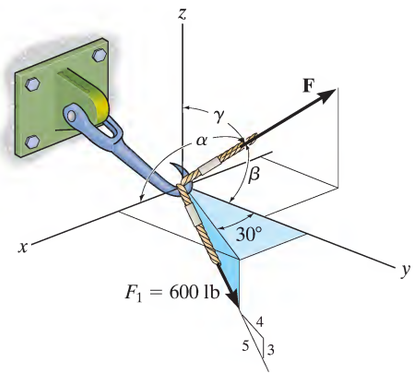

Force Vectors: Since $\cos^2\alpha + \cos^2\beta + \cos^2\gamma = 1$, then $\cos\beta = \pm\sqrt{1 - \cos^2 120° - \cos^2 60°} = \pm 0.7071$. However, it is required that $\beta < 90°$, thus, $\beta = \cos^{-1}(0.7071) = 45°$. By resolving $\mathbf{F}_1$ and $\mathbf{F}_2$ into their x, y, and z components, as shown in Figs. a and b, respectively, $\mathbf{F}_1$ and $\mathbf{F}_2$, can be expressed in Cartesian vector form as

$$\mathbf{F}_1 = 600\left(\frac{4}{5}\right)\sin 30°(+\mathbf{i}) + 600\left(\frac{4}{5}\right)\cos 30°(+\mathbf{j}) + 600\left(\frac{3}{5}\right)(-\mathbf{k})$$
$$= \{240\mathbf{i} + 415.69\mathbf{j} - 360\mathbf{k}\}\ \text{lb}$$
$$\mathbf{F} = 400\cos 120°\mathbf{i} + 400\cos 45°\mathbf{j} + 400\cos 60°\mathbf{k}$$
$$= \{-200\mathbf{i} + 282.84\mathbf{j} + 200\mathbf{k}\}\ \text{lb}$$

Resultant Force: By adding $\mathbf{F}_1$ and $\mathbf{F}$ vectorally, we obtain $\mathbf{F}_R$.

$$\mathbf{F}_R = \mathbf{F}_1 + \mathbf{F}$$
$$= (240\mathbf{i} + 415.69\mathbf{j} - 360\mathbf{k}) + (-200\mathbf{i} + 282.84\mathbf{j} + 200\mathbf{k})$$
$$= \{40\mathbf{i} + 698.53\mathbf{j} - 160\mathbf{k}\}\ \text{lb}$$

The magnitude of $\mathbf{F}_R$ is

$$F_R = \sqrt{(F_R)_x^2 + (F_R)_y^2 + (F_R)_z^2}$$
$$= \sqrt{(40)^2 + (698.53)^2 + (-160)^2} = 717.74\ \text{lb} = 718\ \text{lb} \qquad \textbf{Ans.}$$

The coordinate direction angles of $\mathbf{F}_R$ are

$$\alpha = \cos^{-1}\left[\frac{(F_R)_x}{F_R}\right] = \cos^{-1}\left(\frac{40}{717.74}\right) = 86.8° \qquad \textbf{Ans.}$$

$$\beta = \cos^{-1}\left[\frac{(F_R)_y}{F_R}\right] = \cos^{-1}\left(\frac{698.53}{717.74}\right) = 13.3° \qquad \textbf{Ans.}$$

$$\gamma = \cos^{-1}\left[\frac{(F_R)_z}{F_R}\right] = \cos^{-1}\left(\frac{-160}{717.74}\right) = 103° \qquad \textbf{Ans.}$$

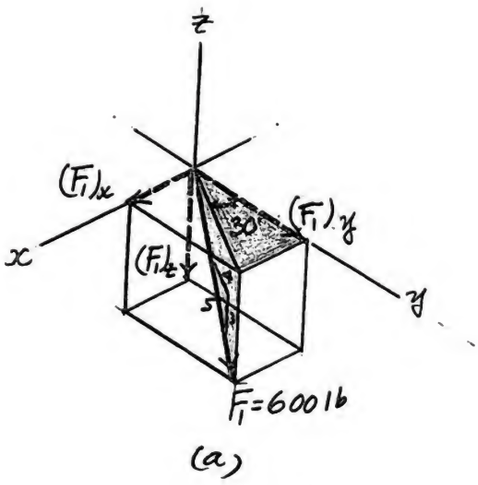

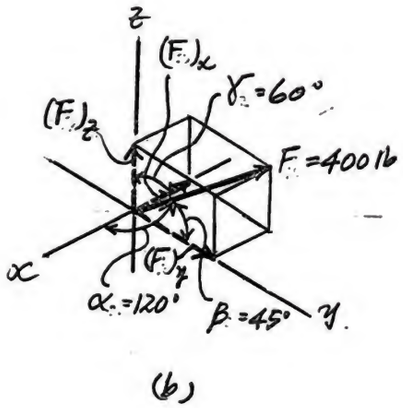

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***2–72.** If the resultant force acting on the hook is $\mathbf{F}_R = \{-200\mathbf{i} + 800\mathbf{j} + 150\mathbf{k}\}$ lb, determine the magnitude and coordinate direction angles of $\mathbf{F}$.

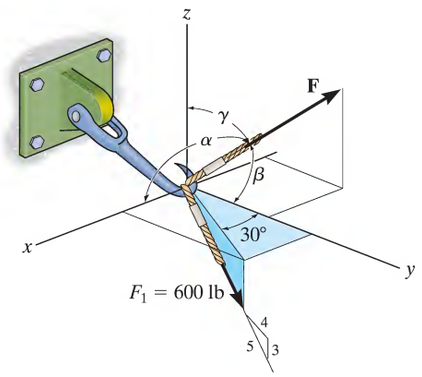

Force Vectors: By resolving $\mathbf{F}_1$ and $\mathbf{F}$ into their x, y, and z components, as shown in Figs. a and b, respectively, $\mathbf{F}_1$ and $\mathbf{F}_2$ can be expressed in Cartesian vector form as

$$\mathbf{F}_1 = 600\left(\frac{4}{5}\right)\sin 30°(+\mathbf{i}) + 600\left(\frac{4}{5}\right)\cos 30°(+\mathbf{j}) + 600\left(\frac{3}{5}\right)(-\mathbf{k})$$
$$= \{240\mathbf{i} + 415.69\mathbf{j} - 360\mathbf{k}\}\ \text{lb}$$
$$\mathbf{F} = F\cos\alpha\mathbf{i} + F\cos\beta\mathbf{j} + F\cos\gamma\mathbf{k}$$

Resultant Force: By adding $\mathbf{F}_1$ and $\mathbf{F}_2$ vectorally, we obtain $\mathbf{F}_R$. Thus,

$$\mathbf{F}_R = \mathbf{F}_1 + \mathbf{F}$$
$$-200\mathbf{i} + 800\mathbf{j} + 150\mathbf{k} = (240\mathbf{i} + 415.69\mathbf{j} - 360\mathbf{k}) + (F\cos\theta_x\mathbf{i} + F\cos\theta_y\mathbf{j} + F\cos\theta_z\mathbf{k})$$
$$-200\mathbf{i} + 800\mathbf{j} + 150\mathbf{k} = (240 + F\cos\alpha)\mathbf{i} + (415.69 + F\cos\beta)\mathbf{j} + (F\cos\gamma - 360)\mathbf{k}$$

Equating the **i**, **j**, and **k** components, we have

$$-200 = 240 + F\cos\theta_x$$
$$F\cos\alpha = -440 \qquad (1)$$

$$800 = 415.69 + F\cos\beta$$
$$F\cos\beta = 384.31 \qquad (2)$$

$$150 = F\cos\gamma - 360$$
$$F\cos\gamma = 510 \qquad (3)$$

Squaring and then adding Eqs. (1), (2), and (3), yields

$$F^2(\cos^2\alpha + \cos^2\beta + \cos^2\gamma) = 601392.49 \qquad (4)$$

However, $\cos^2\alpha + \cos^2\beta + \cos^2\gamma = 1$. Thus, from Eq. (4)

$$F = 775.49\,\text{N} = 775\,\text{N} \qquad \textbf{Ans.}$$

Substituting $F = 775.49$ N into Eqs. (1), (2), and (3), yields

$$\alpha = 125° \quad \beta = 60.3° \quad \gamma = 48.9° \qquad \textbf{Ans.}$$

see Fig. 2-71a

(a)

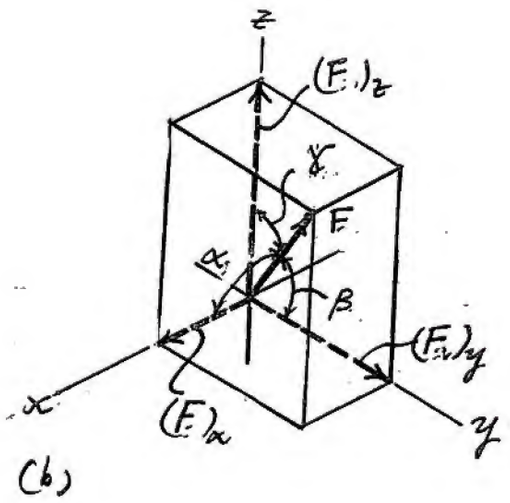

(b)

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–73. The shaft S exerts three force components on the die D. Find the magnitude and coordinate direction angles of the resultant force. Force $\mathbf{F}_2$ acts within the octant shown.

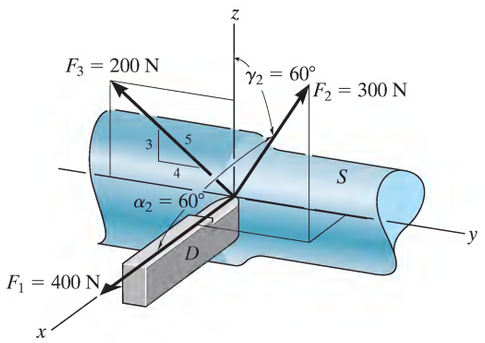

$\mathbf{F}_1 = 400\,\mathbf{i}$

Since $\cos^2 60° + \cos^2 \beta_2 + \cos^2 60° = 1$

Solving for the positive root, $\beta_2 = 45°$

$\mathbf{F}_2 = 300\cos 60°\,\mathbf{i} + 300\cos 45°\,\mathbf{j} + 300\cos 60°\,\mathbf{k}$

$= 150\,\mathbf{i} + 212.1\,\mathbf{j} + 150\,\mathbf{k}$

$\mathbf{F}_3 = -200\left(\frac{4}{5}\right)\mathbf{j} + 200\left(\frac{3}{5}\right)\mathbf{k}$

$= -160\,\mathbf{j} + 120\,\mathbf{k}$

Then

$\mathbf{F}_R = \mathbf{F}_1 + \mathbf{F}_2 + \mathbf{F}_3 = 550\,\mathbf{i} + 52.1\,\mathbf{j} + 270\,\mathbf{k}$

$F_R = \sqrt{(550)^2 + (52.1)^2 + (270)^2} = 614.9\text{ N} = 615\text{ N}$ Ans

$\alpha = \cos^{-1}\left(\frac{550}{614.9}\right) = 26.6°$ Ans

$\beta = \cos^{-1}\left(\frac{52.1}{614.9}\right) = 85.1°$ Ans

$\gamma = \cos^{-1}\left(\frac{270}{614.9}\right) = 64.0°$ Ans

2–74. The mast is subjected to the three forces shown. Determine the coordinate direction angles $\alpha_1, \beta_1, \gamma_1$ of $\mathbf{F}_1$ so that the resultant force acting on the mast is $\mathbf{F}_R = \{350\mathbf{i}\}$ N.

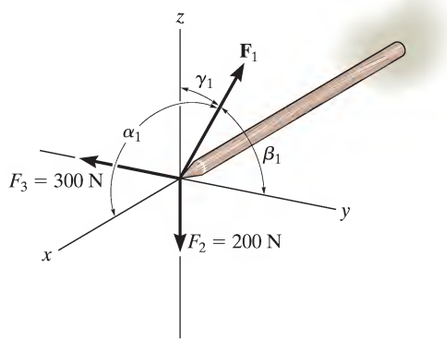

$\mathbf{F}_1 = 500\cos\alpha_1\,\mathbf{i} + 500\cos\beta_1\,\mathbf{j} + 500\cos\gamma_1\,\mathbf{k}$

$\mathbf{F}_R = \mathbf{F}_1 + (-300\mathbf{j}) + (-200\mathbf{k})$

$350\mathbf{i} = 500\cos\alpha_1\,\mathbf{i} + (500\cos\beta_1 - 300)\mathbf{j} + (500\cos\gamma_1 - 200)\mathbf{k}$

$350 = 500\cos\alpha_1;$ $\alpha_1 = 45.6°$ Ans

$0 = 500\cos\beta_1 - 300;$ $\beta_1 = 53.1°$ Ans

$0 = 500\cos\gamma_1 - 200;$ $\gamma_1 = 66.4°$ Ans

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–75. The mast is subjected to the three forces shown. Determine the coordinate direction angles $\alpha_1, \beta_1, \gamma_1$ of $\mathbf{F}_1$ so that the resultant force acting on the mast is zero.

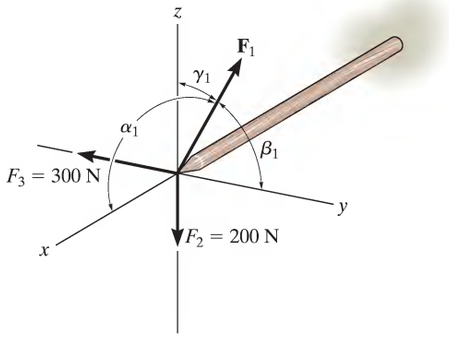

$\mathbf{F}_1 = \{500\cos\alpha_1\,\mathbf{i} + 500\cos\beta_1\,\mathbf{j} + 500\cos\gamma_1\,\mathbf{k}\}$ N

$\mathbf{F}_2 = \{-200\mathbf{k}\}$ N

$\mathbf{F}_3 = \{-300\mathbf{j}\}$ N

$\mathbf{F}_R = \mathbf{F}_1 + \mathbf{F}_2 + \mathbf{F}_3 = \mathbf{0}$

$500\cos\alpha_1 = 0;$ $\alpha_1 = 90°$ Ans

$500\cos\beta_1 = 300;$ $\beta_1 = 53.1°$ Ans

$500\cos\gamma_1 = 200;$ $\gamma_1 = 66.4°$ Ans

***2–76.** Determine the magnitude and coordinate direction angles of $\mathbf{F}_2$ so that the resultant of the two forces acts along the positive x axis and has a magnitude of 500 N.

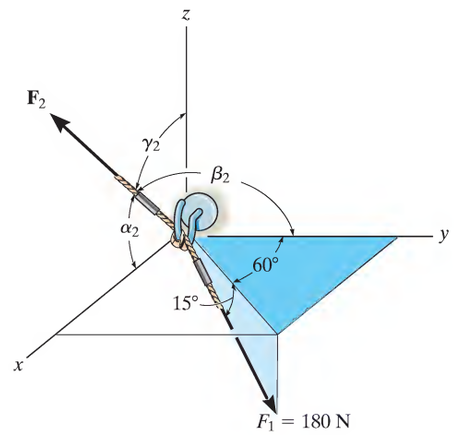

$\mathbf{F}_1 = (180\cos 15°)\sin 60°\,\mathbf{i} + (180\cos 15°)\cos 60°\,\mathbf{j} - 180\sin 15°\,\mathbf{k}$

$= 150.57\,\mathbf{i} + 86.93\,\mathbf{j} - 46.59\,\mathbf{k}$

$\mathbf{F}_2 = F_2\cos\alpha_2\,\mathbf{i} + F_2\cos\beta_2\,\mathbf{j} + F_2\cos\gamma_2\,\mathbf{k}$

$\mathbf{F}_R = \{500\,\mathbf{i}\}$ N

$\mathbf{F}_R = \mathbf{F}_1 + \mathbf{F}_2$

i components :

$500 = 150.57 + F_2\cos\alpha_2$

$F_{2x} = F_2\cos\alpha_2 = 349.43$

j components :

$0 = 86.93 + F_2\cos\beta_2$

$F_{2y} = F_2\cos\beta_2 = -86.93$

k components :

$0 = -46.59 + F_2\cos\gamma_2$

$F_{2z} = F_2\cos\gamma_2 = 46.59$

Thus,

$F_2 = \sqrt{F_{2x}^2 + F_{2y}^2 + F_{2z}^2} = \sqrt{(349.43)^2 + (-86.93)^2 + (46.59)^2}$

$F_2 = 363$ N Ans

$\alpha_2 = 15.8°$ Ans

$\beta_2 = 104°$ Ans

$\gamma_2 = 82.6°$ Ans

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–77. Determine the magnitude and coordinate direction angles of $\mathbf{F}_2$ so that the resultant of the two forces is zero.

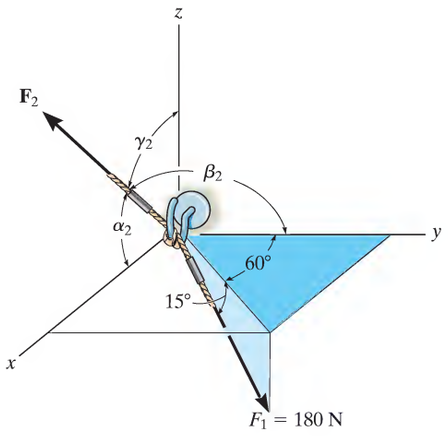

$\mathbf{F}_1 = (180\cos 15°)\sin 60°\,\mathbf{i} + (180\cos 15°)\cos 60°\,\mathbf{j} - 180\sin 15°\,\mathbf{k}$

$= 150.57\,\mathbf{i} + 86.93\,\mathbf{j} - 46.59\,\mathbf{k}$

$\mathbf{F}_2 = F_2\cos\alpha_2\,\mathbf{i} + F_2\cos\beta_2\,\mathbf{j} + F_2\cos\gamma_2\,\mathbf{k}$

$\mathbf{F}_R = \mathbf{0}$

i components :

$$0 = 150.57 + F_2\cos\alpha_2$$

$$F_2\cos\alpha_2 = -150.57$$

j components :

$$0 = 86.93 + F_2\cos\beta_2$$

$$F_2\cos\beta_2 = -86.93$$

k components :

$$0 = -46.59 + F_2\cos\gamma_2$$

$$F_2\cos\gamma_2 = 46.59$$

$$F_2 = \sqrt{(-150.57)^2 + (-86.93)^2 + (46.59)^2}$$

Solving,

$F_2 = 180\text{ N}$ Ans

$\alpha_2 = 147°$ Ans

$\beta_2 = 119°$ Ans

$\gamma_2 = 75.0°$ Ans

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–78. If the resultant force acting on the bracket is directed along the positive y axis, determine the magnitude of the resultant force and the coordinate direction angles of $\mathbf{F}$ so that $\beta < 90°$.

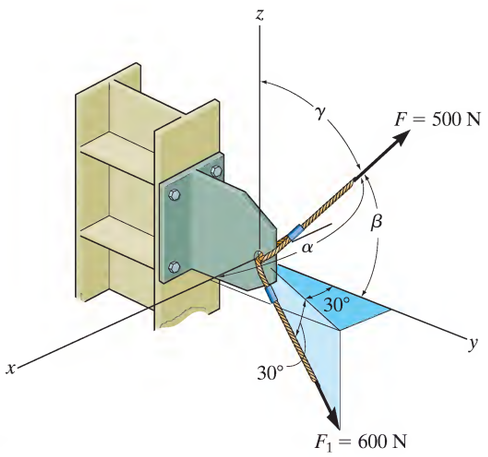

Force Vectors: By resolving $\mathbf{F}_1$ and $\mathbf{F}$ into their x, y, and z components, as shown in Figs. a and b, respectively, $\mathbf{F}_1$ and $\mathbf{F}$ can be expressed in Cartesian vector form as

$$\mathbf{F}_1 = 600\cos 30°\sin 30°(+\mathbf{i}) + 600\cos 30°\cos 30°(+\mathbf{j}) + 600\sin 30°(-\mathbf{k})$$
$$= \{259.81\mathbf{i} + 450\mathbf{j} - 300\mathbf{k}\}\ \text{N}$$
$$\mathbf{F} = 500\cos\alpha\,\mathbf{i} + 500\cos\beta\,\mathbf{j} + 500\cos\gamma\,\mathbf{k}$$

Since the resultant force $\mathbf{F}_R$ is directed towards the positive y axis, then

$$\mathbf{F}_R = F_R\mathbf{j}$$

Resultant Force:

$$\mathbf{F}_R = \mathbf{F}_1 + \mathbf{F}$$
$$F_R\mathbf{j} = (259.81\mathbf{i} + 450\mathbf{j} - 300\mathbf{k}) + (500\cos\theta_x\mathbf{i} + 500\cos\theta_y\mathbf{j} + 500\cos\theta_z\mathbf{k})$$
$$F_R\mathbf{j} = (259.81 + 500\cos\alpha)\mathbf{i} + (450 + 500\cos\beta)\mathbf{j} + (500\cos\gamma - 300)\mathbf{k}$$

Equating the $\mathbf{i}$, $\mathbf{j}$, and $\mathbf{k}$ components,

$$0 = 259.81 + 500\cos\alpha$$
$$\alpha = 121.31° = 121° \qquad \text{Ans.}$$
$$F_R = 450 + 500\cos\beta \qquad (1)$$

$$0 = 500\cos\gamma - 300$$
$$\gamma = 53.13° = 53.1° \qquad \text{Ans.}$$

However, since $\cos^2\alpha + \cos^2\beta + \cos^2\gamma = 1$, $\alpha = 121.31°$, and $\gamma = 53.13°$,

$$\cos\beta = \pm\sqrt{1 - \cos^2 121.31° - \cos^2 53.13°} = \pm 0.6083$$

If we substitute $\cos\beta = 0.6083$ into Eq. (1),

$$F_R = 450 + 500(0.6083) = 754\ \text{N} \qquad \text{Ans.}$$

and

$$\beta = \cos^{-1}(0.6083) = 52.5° \qquad \text{Ans.}$$

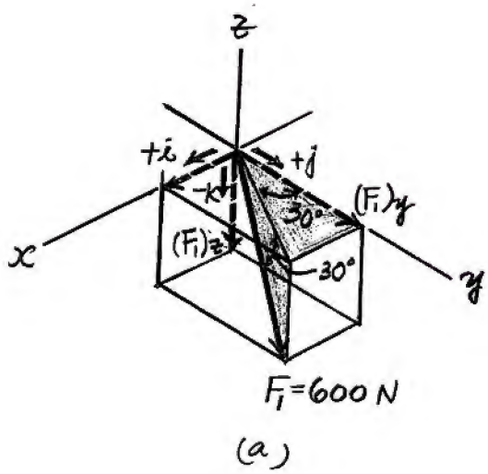

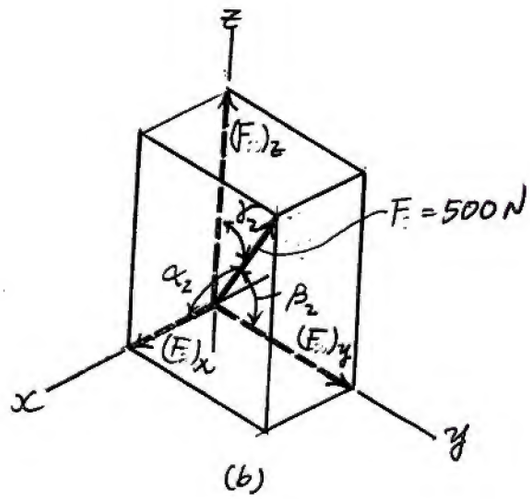

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–79. Specify the magnitude of $\mathbf{F}_3$ and its coordinate direction angles $\alpha_3, \beta_3, \gamma_3$ so that the resultant force $\mathbf{F}_R = \{9\mathbf{j}\}$ kN.

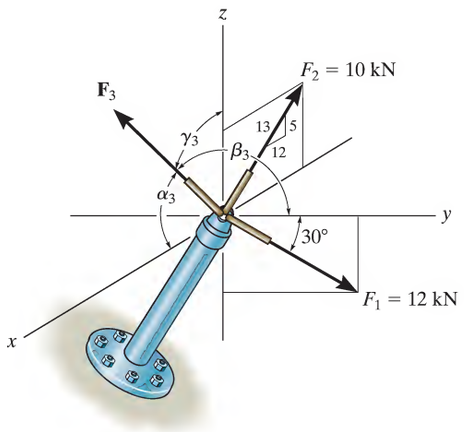

$\mathbf{F}_1 = 12\cos 30°\,\mathbf{j} - 12\sin 30°\,\mathbf{k} = 10.392\,\mathbf{j} - 6\,\mathbf{k}$

$\mathbf{F}_2 = -\frac{12}{13}(10)\,\mathbf{i} + \frac{5}{13}(10)\,\mathbf{k} = -9.231\,\mathbf{i} + 3.846\,\mathbf{k}$

Require

$\mathbf{F}_R = \mathbf{F}_1 + \mathbf{F}_2 + \mathbf{F}_3$

$9\,\mathbf{j} = 10.392\,\mathbf{j} - 6\,\mathbf{k} - 9.231\,\mathbf{i} + 3.846\,\mathbf{k} + \mathbf{F}_3$

$\mathbf{F}_3 = 9.231\,\mathbf{i} - 1.392\,\mathbf{j} + 2.154\,\mathbf{k}$

Hence,

$F_3 = \sqrt{(9.231)^2 + (-1.392)^2 + (2.154)^2}$

$F_3 = 9.581\text{ kN} = 9.58\text{ kN}$ **Ans**

$\alpha_3 = \cos^{-1}\left(\frac{9.231}{9.581}\right) = 15.5°$ **Ans**

$\beta_3 = \cos^{-1}\left(\frac{-1.392}{9.581}\right) = 98.4°$ **Ans**

$\gamma_3 = \cos^{-1}\left(\frac{2.154}{9.581}\right) = 77.0°$ **Ans**

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***2–80.** If $F_3 = 9$ kN, $\theta = 30°$, and $\phi = 45°$, determine the magnitude and coordinate direction angles of the resultant force acting on the ball-and-socket joint.

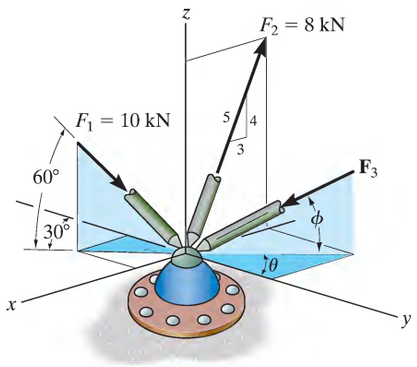

Force Vectors: By resolving $\mathbf{F}_1$, $\mathbf{F}_2$ and $\mathbf{F}_3$ into their x, y, and z components, as shown in Figs. respectively, $\mathbf{F}_1$, $\mathbf{F}_2$ and $\mathbf{F}_3$ can be expressed in Cartesian vector form as

$$\mathbf{F}_1 = 10\cos 60°\sin 30°(-\mathbf{i}) + 10\cos 60°\cos 30°(+\mathbf{j}) + 10\sin 60°(-\mathbf{k})$$
$$= \{-2.5\mathbf{i} + 4.330\mathbf{j} - 8.660\mathbf{k}\}\ \text{kN}$$

$$\mathbf{F}_2 = 8\left(\frac{3}{5}\right)(-\mathbf{i}) + 0\mathbf{j} + 8\left(\frac{4}{5}\right)(+\mathbf{k})$$
$$= \{-4.8\mathbf{i} + 6.4\mathbf{k}\}\ \text{kN}$$

$$\mathbf{F}_3 = 9\cos 45°\sin 30°(+\mathbf{i}) + 9\cos 45°\cos 30°(-\mathbf{j}) + 9\sin 45°(-\mathbf{k})$$
$$= \{3.182\mathbf{i} - 5.511\mathbf{j} - 6.364\mathbf{k}\}\ \text{kN}$$

Resultant Force: By adding $\mathbf{F}_1$, $\mathbf{F}_2$ and $\mathbf{F}_3$ vectorially, we obtain $\mathbf{F}_R$. Thus,

$$\mathbf{F}_R = \mathbf{F}_1 + \mathbf{F}_2 + \mathbf{F}_3$$
$$= (-2.5\mathbf{i} + 4.330\mathbf{j} - 8.660\mathbf{k}) + (-4.8\mathbf{i} + 6.4\mathbf{k}) + (3.182\mathbf{i} - 5.511\mathbf{j} - 6.364\mathbf{k})$$
$$= \{-4.118\mathbf{i} - 1.181\mathbf{j} - 8.624\mathbf{k}\}\ \text{kN}$$

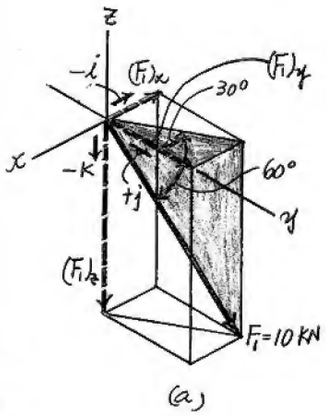

(a)

The magnitude of $\mathbf{F}_R$ is

$$F_R = \sqrt{(F_R)_x^2 + (F_R)_y^2 + (F_R)_z^2}$$
$$= \sqrt{(-4.118)^2 + (-1.181)^2 + (-8.624)^2} = 9.630\ \text{kN} = 9.63\ \text{kN}$$ **Ans.**

The coordinate direction angles of $\mathbf{F}_R$ are

$$\alpha = \cos^{-1}\left[\frac{(F_R)_x}{F_R}\right] = \cos^{-1}\left(\frac{-4.118}{9.630}\right) = 115°$$ **Ans.**

$$\beta = \cos^{-1}\left[\frac{(F_R)_y}{F_R}\right] = \cos^{-1}\left(\frac{-1.181}{9.630}\right) = 97.0°$$ **Ans.**

$$\gamma = \cos^{-1}\left[\frac{(F_R)_z}{F_R}\right] = \cos^{-1}\left(\frac{-8.624}{9.630}\right) = 154°$$ **Ans.**



(c)

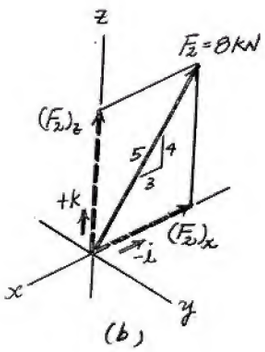

(b)

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–81. The pole is subjected to the force **F**, which has components acting along the *x, y, z* axes as shown. If the magnitude of **F** is 3 kN, $\beta = 30°$, and $\gamma = 75°$, determine the magnitudes of its three components.

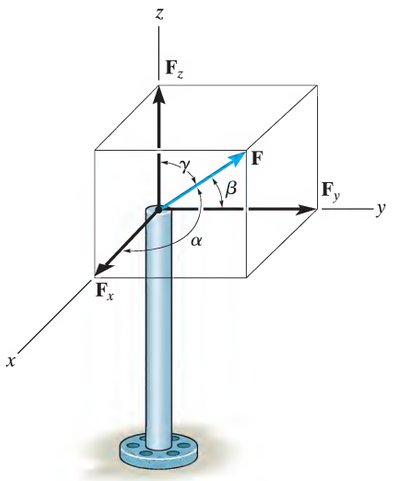

$\cos^2\alpha + \cos^2\beta + \cos^2\gamma = 1$

$\cos^2\alpha + \cos^2 30° + \cos^2 75° = 1$

$\alpha = 64.67°$

$F_x = 3\cos 64.67° = 1.28\ \text{kN}$ **Ans**

$F_y = 3\cos 30° = 2.60\ \text{kN}$ **Ans**

$F_z = 3\cos 75° = 0.776\ \text{kN}$ **Ans**

2–82. The pole is subjected to the force **F** which has components $F_x = 1.5$ kN and $F_z = 1.25$ kN. If $\beta = 75°$, determine the magnitudes of **F** and $\mathbf{F}_y$.

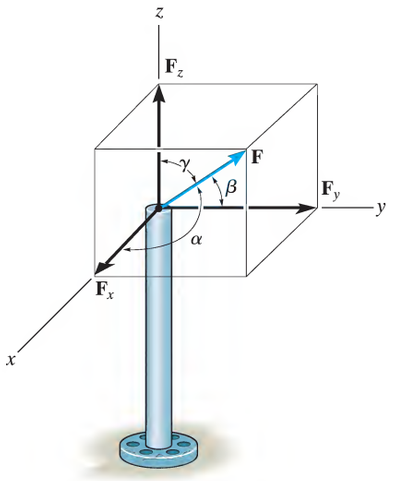

$\cos^2\alpha + \cos^2\beta + \cos^2\gamma = 1$

$\left(\frac{1.5}{F}\right)^2 + \cos^2 75° + \left(\frac{1.25}{F}\right)^2 = 1$

$F = 2.02\ \text{kN}$ **Ans**

$F_y = 2.02\cos 75° = 0.523\ \text{kN}$ **Ans**

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–83. Three forces act on the ring. If the resultant force $\mathbf{F}_R$ has a magnitude and direction as shown, determine the magnitude and the coordinate direction angles of force $\mathbf{F}_3$.

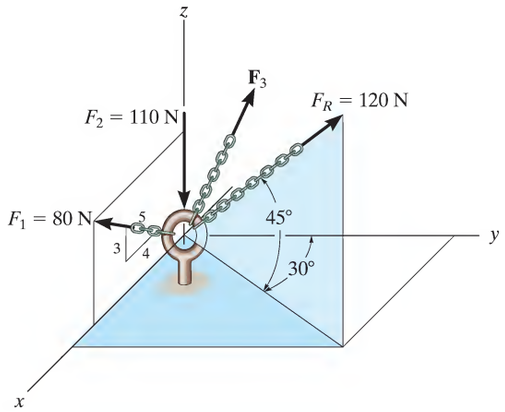

Cartesian Vector Notation :

$$\mathbf{F}_R = 120\{\cos 45°\sin 30°\mathbf{i} + \cos 45°\cos 30°\mathbf{j} + \sin 45°\mathbf{k}\}\ \text{N}$$
$$= \{42.43\mathbf{i} + 73.48\mathbf{j} + 84.85\mathbf{k}\}\ \text{N}$$

$$\mathbf{F}_1 = 80\left\{\frac{4}{5}\mathbf{i} + \frac{3}{5}\mathbf{k}\right\}\text{N} = \{64.0\mathbf{i} + 48.0\mathbf{k}\}\ \text{N}$$

$$\mathbf{F}_2 = \{-110\mathbf{k}\}\ \text{N}$$

$$\mathbf{F}_3 = \{F_{3_x}\mathbf{i} + F_{3_y}\mathbf{j} + F_{3_z}\mathbf{k}\}\ \text{N}$$

Resultant Force :

$$\mathbf{F}_R = \mathbf{F}_1 + \mathbf{F}_2 + \mathbf{F}_3$$
$$\{42.43\mathbf{i} + 73.48\mathbf{j} + 84.85\mathbf{k}\} = \{(64.0 + F_{3_x})\mathbf{i} + F_{3_y}\mathbf{j} + (48.0 - 110 + F_{3_z})\mathbf{k}\}$$

Equating i, j and k components, we have

$$64.0 + F_{3_x} = 42.43 \qquad F_{3_x} = -21.57\ \text{N}$$
$$F_{3_y} = 73.48\ \text{N}$$
$$48.0 - 110 + F_{3_z} = 84.85 \qquad F_{3_z} = 146.85\ \text{N}$$

The magnitude of force $\mathbf{F}_3$ is

$$F_3 = \sqrt{F_{3_x}^2 + F_{3_y}^2 + F_{3_z}^2}$$
$$= \sqrt{(-21.57)^2 + 73.48^2 + 146.85^2}$$
$$= 165.62\ \text{N} = 166\ \text{N} \qquad \textbf{Ans}$$

The coordinate direction angles for $\mathbf{F}_3$ are

$$\cos\alpha = \frac{F_{3_x}}{F_3} = \frac{-21.57}{165.62} \qquad \alpha = 97.5° \qquad \textbf{Ans}$$
$$\cos\beta = \frac{F_{3_y}}{F_3} = \frac{73.48}{165.62} \qquad \beta = 63.7° \qquad \textbf{Ans}$$
$$\cos\gamma = \frac{F_{3_z}}{F_3} = \frac{146.85}{165.62} \qquad \gamma = 27.5° \qquad \textbf{Ans}$$

***2–84.** Determine the coordinate direction angles of $\mathbf{F}_1$ and $\mathbf{F}_R$.

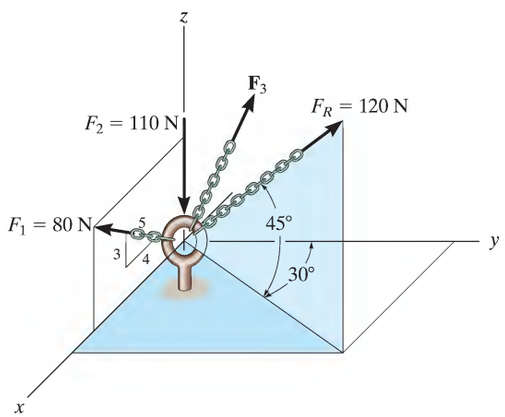

Unit Vector of $\mathbf{F}_1$ and $\mathbf{F}_R$:

$$\mathbf{u}_{F_1} = \frac{4}{5}\mathbf{i} + \frac{3}{5}\mathbf{k} = 0.8\mathbf{i} + 0.6\mathbf{k}$$

$$\mathbf{u}_R = \cos 45°\sin 30°\mathbf{i} + \cos 45°\cos 30°\mathbf{j} + \sin 45°\mathbf{k}$$
$$= 0.3536\mathbf{i} + 0.6124\mathbf{j} + 0.7071\mathbf{k}$$

Thus, the coordinate direction angles $\mathbf{F}_1$ and $\mathbf{F}_R$ are

$$\cos\alpha_{F_1} = 0.8 \qquad \alpha_{F_1} = 36.9° \qquad \textbf{Ans}$$
$$\cos\beta_{F_1} = 0 \qquad \beta_{F_1} = 90.0° \qquad \textbf{Ans}$$
$$\cos\gamma_{F_1} = 0.6 \qquad \gamma_{F_1} = 53.1° \qquad \textbf{Ans}$$

$$\cos\alpha_R = 0.3536 \qquad \alpha_R = 69.3° \qquad \textbf{Ans}$$
$$\cos\beta_R = 0.6124 \qquad \beta_R = 52.2° \qquad \textbf{Ans}$$
$$\cos\gamma_R = 0.7071 \qquad \gamma_R = 45.0° \qquad \textbf{Ans}$$

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–85. Two forces $\mathbf{F}_1$ and $\mathbf{F}_2$ act on the bolt. If the resultant force $\mathbf{F}_R$ has a magnitude of 50 lb and coordinate direction angles $\alpha = 110°$ and $\beta = 80°$, as shown, determine the magnitude of $\mathbf{F}_2$ and its coordinate direction angles.

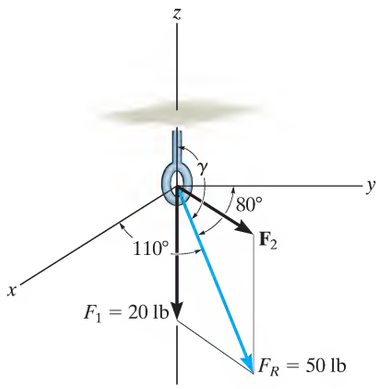

$$(1)^2 = \cos^2 110° + \cos^2 80° + \cos^2 \gamma$$

$$\gamma = 157.44°$$

$$\mathbf{F}_R = \mathbf{F}_1 + \mathbf{F}_2$$

$$50 \cos 110° = (F_2)_x$$

$$50 \cos 80° = (F_2)_y$$

$$50 \cos 157.44° = (F_2)_z - 20$$

$$(F_2)_x = -17.10$$

$$(F_2)_y = 8.68$$

$$(F_2)_z = -26.17$$

$$F_2 = \sqrt{(-17.10)^2 + (8.68)^2 + (-26.17)^2} = 32.4 \text{ lb} \qquad \textbf{Ans}$$

$$\alpha_2 = \cos^{-1}\left(\frac{-17.10}{32.4}\right) = 122° \qquad \textbf{Ans}$$

$$\beta_2 = \cos^{-1}\left(\frac{8.68}{32.4}\right) = 74.5° \qquad \textbf{Ans}$$

$$\gamma_2 = \cos^{-1}\left(\frac{-26.17}{32.4}\right) = 144° \qquad \textbf{Ans}$$

2–86. Determine the position vector **r** directed from point A to point B and the length of cord AB. Take $z = 4$ m.

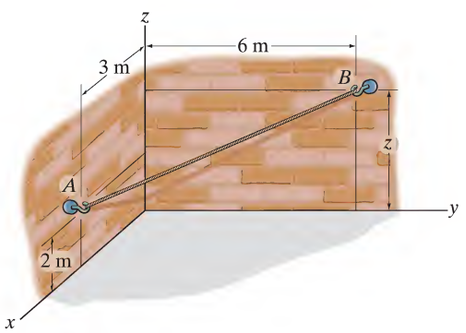

Position Vector: The coordinates for points A and B are $A(3, 0, 2)$ m and $B(0, 6, 4)$ m, respectively. Thus,

$$\mathbf{r}_{AB} = (0-3)\mathbf{i} + (6-0)\mathbf{j} + (4-2)\mathbf{k}$$
$$= \{-3\mathbf{i} + 6\mathbf{j} + 2\mathbf{k}\} \text{ m} \qquad \textbf{Ans.}$$

The length of cord AB is

$$r_{AB} = \sqrt{(-3)^2 + 6^2 + 2^2} = 7 \text{ m} \qquad \textbf{Ans.}$$

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–87. If the cord AB is 7.5 m long, determine the coordinate position $+z$ of point B

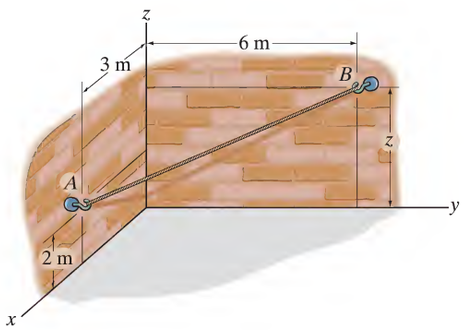

Position Vector: The coordinates for points A and B are $A(3, 0, 2)$ m and $B(0, 6, z)$ m, respectively. Thus,

$$\mathbf{r}_{AB} = (0-3)\mathbf{i}+(6-0)\mathbf{j}+(z-2)\mathbf{k}$$
$$=\{-3\mathbf{i}+6\mathbf{j}+(z-2)\mathbf{k}\}\ \text{m}$$

Since the length of cord is equal to the magnitude of $\mathbf{r}_{AB}$, then

$$r_{AB} = 7.5 = \sqrt{(-3)^2+6^2+(z-2)^2}$$
$$56.25 = 45+(z-2)^2$$
$$z-2 = \pm 3.354$$
$$z = 5.35\ \text{m} \qquad \textbf{Ans.}$$

*2–88. Determine the distance between the end points A and B on the wire by first formulating a position vector from A to B and then determining its magnitude.

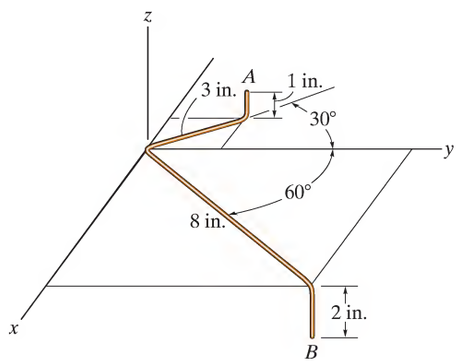

$$\mathbf{r}_{AB} = (8\sin 60^\circ-(-3\sin 30^\circ))\,\mathbf{i}+(8\cos 60^\circ-3\cos 30^\circ)\,\mathbf{j}+(-2-1)\,\mathbf{k}$$

$$\mathbf{r}_{AB} = \{8.428\,\mathbf{i}+1.402\,\mathbf{j}-3\,\mathbf{k}\}\ \text{in.}$$

$$r_{AB} = \sqrt{(8.428)^2+(1.402)^2+(-3)^2} = 9.06\ \text{in.} \qquad \textbf{Ans}$$

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–89. Determine the magnitude and coordinate direction angles of the resultant force acting at A.

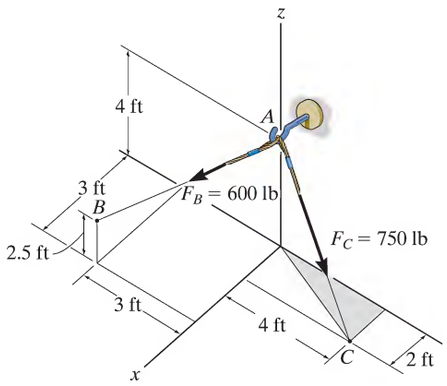

Unit Vectors: The coordinate points A, B, and C are shown in Fig. a. Thus,

$$\mathbf{u}_B = \frac{\mathbf{r}_B}{r_B} = \frac{(3-0)\mathbf{i}+(-3-0)\mathbf{j}+(2.5-4)\mathbf{k}}{\sqrt{(3-0)^2+(-3-0)^2+(2.5-4)^2}}$$

$$= \frac{2}{3}\mathbf{i}-\frac{2}{3}\mathbf{j}-\frac{1}{3}\mathbf{k}$$

$$\mathbf{u}_C = \frac{\mathbf{r}_C}{r_C} = \frac{(2-0)\mathbf{i}+(4-0)\mathbf{j}+(0-4)\mathbf{k}}{\sqrt{(2-0)^2+(4-0)^2+(0-4)^2}}$$

$$= \frac{1}{3}\mathbf{i}+\frac{2}{3}\mathbf{j}-\frac{2}{3}\mathbf{k}$$

Force Vectors: Multiplying the magnitude of the force with its unit vector, we have

$$\mathbf{F}_B = F_B\mathbf{u}_B = 600\left(\frac{2}{3}\mathbf{i}-\frac{2}{3}\mathbf{j}-\frac{1}{3}\mathbf{k}\right) = \{400\mathbf{i}-400\mathbf{j}-200\mathbf{k}\}\ \text{lb} \qquad \textbf{Ans.}$$

$$\mathbf{F}_C = F_C\mathbf{u}_C = 750\left(\frac{1}{3}\mathbf{i}+\frac{2}{3}\mathbf{j}-\frac{2}{3}\mathbf{k}\right) = \{250\mathbf{i}+500\mathbf{j}-500\mathbf{k}\}\ \text{lb} \qquad \textbf{Ans.}$$

$$\mathbf{F}_R = \mathbf{F}_B + \mathbf{F}_C = 400\mathbf{i}-400\mathbf{j}-200\mathbf{k}+250\mathbf{i}+500\mathbf{j}-500\mathbf{k}$$

$$\mathbf{F}_R = \{650\mathbf{i}+100\mathbf{j}-700\mathbf{k}\}\ \text{lb}$$

$$F_R = \sqrt{650^2+100^2+(-700)^2} = 960\ \text{lb} \qquad \textbf{Ans.}$$

$$\alpha = \cos^{-1}\left[\frac{(F_R)_x}{F_R}\right] = \cos^{-1}\left(\frac{650}{960}\right) = 47.4° \qquad \textbf{Ans.}$$

$$\beta = \cos^{-1}\left[\frac{(F_R)_y}{F_R}\right] = \cos^{-1}\left(\frac{100}{960}\right) = 84.0° \qquad \textbf{Ans.}$$

$$\gamma = \cos^{-1}\left[\frac{(F_R)_z}{F_R}\right] = \cos^{-1}\left(\frac{-700}{960}\right) = 137° \qquad \textbf{Ans.}$$

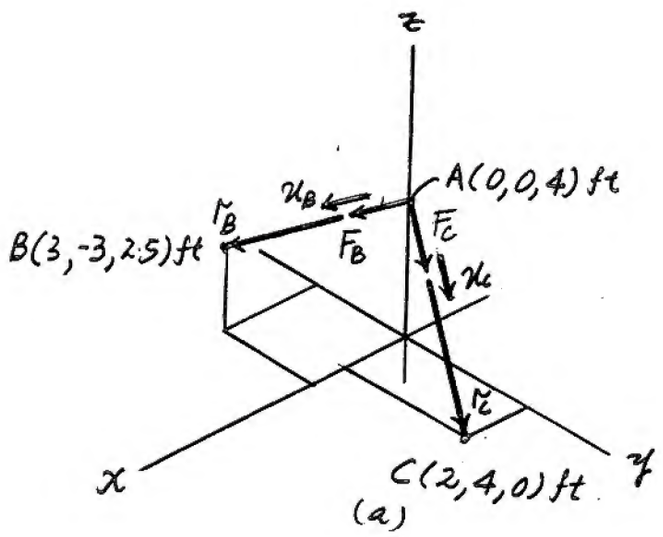

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–90. Determine the magnitude and coordinate direction angles of the resultant force.

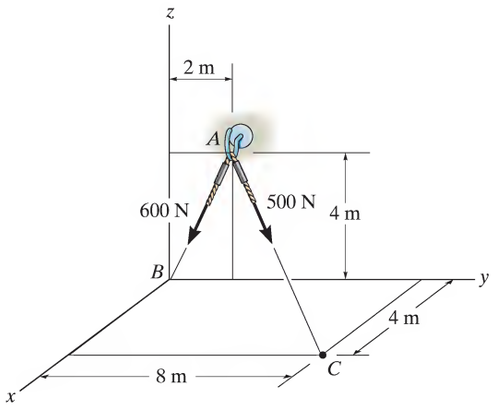

$\mathbf{r}_{AB} = \{-2\,\mathbf{j} - 4\,\mathbf{k}\}\text{m}; \quad r_{AB} = 4.472\text{ m}$

$\mathbf{u}_{AB} = \left(\frac{\mathbf{r}_{AB}}{r_{AB}}\right) = -0.447\,\mathbf{j} - 0.894\,\mathbf{k}$

$\mathbf{F}_{AB} = 600\,\mathbf{u}_{AB} = \{-268.33\,\mathbf{j} - 536.66\,\mathbf{k}\}\text{N}$

$\mathbf{r}_{AC} = \{4\,\mathbf{i} + 6\,\mathbf{j} - 4\,\mathbf{k}\}\text{m}; \quad r_{AC} = 8.246\text{ m}$

$\mathbf{u}_{AC} = \left(\frac{\mathbf{r}_{AC}}{r_{AC}}\right) = 0.485\,\mathbf{i} + 0.728\,\mathbf{j} - 0.485\,\mathbf{k}$

$\mathbf{F}_{AC} = 500\,\mathbf{u}_{AC} = \{242.54\,\mathbf{i} + 363.80\,\mathbf{j} - 242.54\,\mathbf{k}\}\text{N}$

$\mathbf{F}_R = \mathbf{F}_{AB} + \mathbf{F}_{AC}$

$\mathbf{F}_R = \{242.54\,\mathbf{i} + 95.47\,\mathbf{j} - 779.20\,\mathbf{k}\}$

$F_R = \sqrt{(242.54)^2 + (95.47)^2 + (-779.20)^2} = 821.64 = 822\text{ N}$ **Ans**

$\alpha = \cos^{-1}\left(\frac{242.54}{821.64}\right) = 72.8°$ **Ans**

$\beta = \cos^{-1}\left(\frac{95.47}{821.64}\right) = 83.3°$ **Ans**

$\gamma = \cos^{-1}\left(\frac{-779.20}{821.64}\right) = 162°$ **Ans**

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–91. Determine the magnitude and coordinate direction angles of the resultant force acting at A.

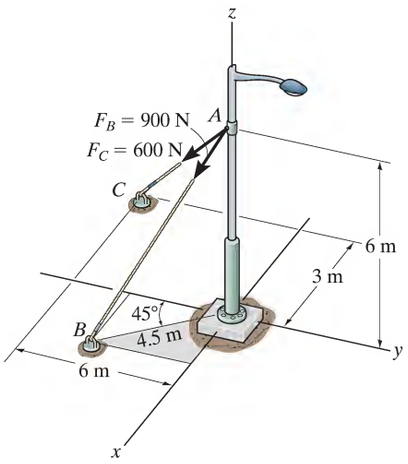

Force Vectors: The unit vectors $\mathbf{u}_B$ and $\mathbf{u}_C$ of $\mathbf{F}_B$ and $\mathbf{F}_C$ must be determined first. From Fig. *a*

$$\mathbf{u}_B = \frac{\mathbf{r}_B}{r_B} = \frac{(4.5\sin 45° - 0)\mathbf{i} + (-4.5\cos 45° - 0)\mathbf{j} + (0 - 6)\mathbf{k}}{\sqrt{(4.5\sin 45° - 0)^2 + (-4.5\cos 45° - 0)^2 + (0 - 6)^2}}$$
$$= 0.4243\mathbf{i} - 0.4243\mathbf{j} - 0.8\mathbf{k}$$

$$\mathbf{u}_C = \frac{\mathbf{r}_C}{r_C} = \frac{(-3 - 0)\mathbf{i} + (-6 - 0)\mathbf{j} + (0 - 6)\mathbf{k}}{\sqrt{(-3 - 0)^2 + (-6 - 0)^2 + (0 - 6)^2}}$$
$$= -\frac{1}{3}\mathbf{i} - \frac{2}{3}\mathbf{j} - \frac{2}{3}\mathbf{k}$$

Thus, the force vectors $\mathbf{F}_B$ and $\mathbf{F}_C$ are given by

$$\mathbf{F}_B = F_B\mathbf{u}_B = 900(0.4243\mathbf{i} - 0.4243\mathbf{j} - 0.8\mathbf{k}) = \{381.84\mathbf{i} - 381.84\mathbf{j} - 720\mathbf{k}\}\text{N}$$

$$\mathbf{F}_C = F_C\mathbf{u}_C = 600\left(-\frac{1}{3}\mathbf{i} - \frac{2}{3}\mathbf{j} - \frac{2}{3}\mathbf{k}\right) = \{-200\mathbf{i} - 400\mathbf{j} - 400\mathbf{k}\}\text{N}$$

Resultant Force:

$$\mathbf{F}_R = \mathbf{F}_B + \mathbf{F}_C = (381.84\mathbf{i} - 381.84\mathbf{j} - 720\mathbf{k}) + (-200\mathbf{i} - 400\mathbf{j} - 400\mathbf{k})$$
$$= \{181.84\mathbf{i} - 781.84\mathbf{j} - 1120\mathbf{k}\}\text{ N}$$

The magnitude of $\mathbf{F}_R$ is

$$F_R = \sqrt{(F_R)_x^2 + (F_R)_y^2 + (F_R)_z^2}$$
$$= \sqrt{(181.84)^2 + (-781.84)^2 + (-1120)^2} = 1377.95\text{ N} = 1.38\text{ kN}$$ **Ans.**

The coordinate direction angles of $\mathbf{F}_R$ are

$$\alpha = \cos^{-1}\left[\frac{(F_R)_x}{F_R}\right] = \cos^{-1}\left(\frac{181.84}{1377.95}\right) = 82.4°$$ **Ans.**

$$\beta = \cos^{-1}\left[\frac{(F_R)_y}{F_R}\right] = \cos^{-1}\left(\frac{-781.84}{1377.95}\right) = 125°$$ **Ans.**

$$\gamma = \cos^{-1}\left[\frac{(F_R)_z}{F_R}\right] = \cos^{-1}\left(\frac{-1120}{1377.95}\right) = 144°$$ **Ans.**

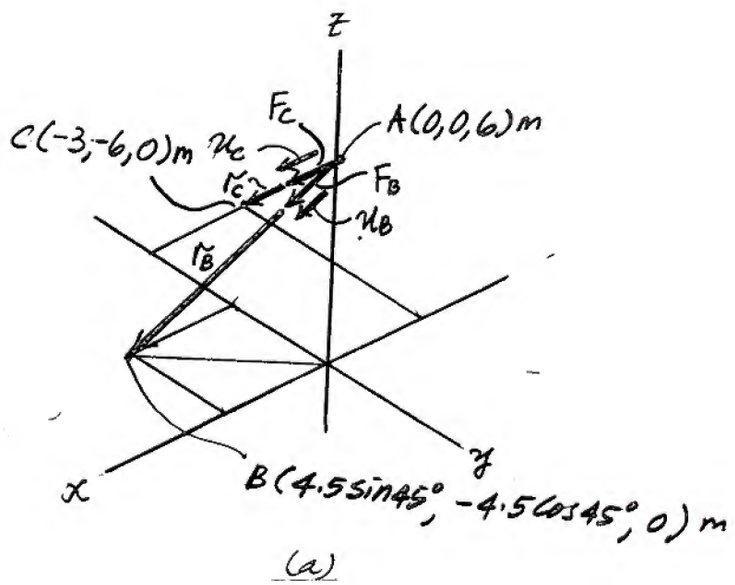

(a)

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

*2–92. Determine the magnitude and coordinate direction angles of the resultant force.

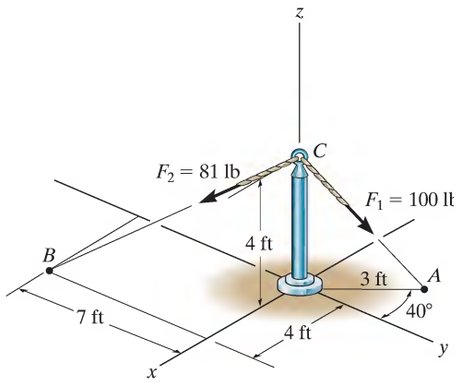

$$\mathbf{F}_1 = -100\left(\frac{3}{5}\right)\sin 40^\circ\,\mathbf{i} + 100\left(\frac{3}{5}\right)\cos 40^\circ\,\mathbf{j} - 100\left(\frac{4}{5}\right)\mathbf{k}$$

$$= \{-38.567\,\mathbf{i} + 45.963\,\mathbf{j} - 80\,\mathbf{k}\}\ \text{lb}$$

$$\mathbf{F}_2 = 81\ \text{lb}\left(\frac{4}{9}\,\mathbf{i} - \frac{7}{9}\,\mathbf{j} - \frac{4}{9}\,\mathbf{k}\right)$$

$$= \{36\,\mathbf{i} - 63\,\mathbf{j} - 36\,\mathbf{k}\}\ \text{lb}$$

$$\mathbf{F}_R = \mathbf{F}_1 + \mathbf{F}_2 = \{-2.567\,\mathbf{i} - 17.04\,\mathbf{j} - 116.0\,\mathbf{k}\}\ \text{lb}$$

$$F_R = \sqrt{(-2.567)^2 + (-17.04)^2 + (-116.0)^2} = 117.27\ \text{lb} = 117\ \text{lb} \quad \textbf{Ans}$$

$$\alpha = \cos^{-1}\left(\frac{-2.567}{117.27}\right) = 91.3^\circ \quad \textbf{Ans}$$

$$\beta = \cos^{-1}\left(\frac{-17.04}{117.27}\right) = 98.4^\circ \quad \textbf{Ans}$$

$$\gamma = \cos^{-1}\left(\frac{-116.0}{117.27}\right) = 172^\circ \quad \textbf{Ans}$$

•2–93. The chandelier is supported by three chains which are concurrent at point O. If the force in each chain has a magnitude of 60 lb, express each force as a Cartesian vector and determine the magnitude and coordinate direction angles of the resultant force.

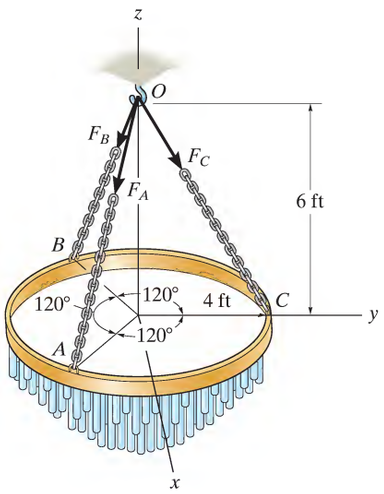

$$\mathbf{F}_A = 60\,\frac{(4\cos 30^\circ\,\mathbf{i} - 4\sin 30^\circ\,\mathbf{j} - 6\,\mathbf{k})}{\sqrt{(4\cos 30^\circ)^2 + (-4\sin 30^\circ)^2 + (-6)^2}}$$

$$= \{28.8\,\mathbf{i} - 16.6\,\mathbf{j} - 49.9\,\mathbf{k}\}\ \text{lb} \quad \textbf{Ans}$$

$$\mathbf{F}_B = 60\,\frac{(-4\cos 30^\circ\,\mathbf{i} - 4\sin 30^\circ\,\mathbf{j} - 6\,\mathbf{k})}{\sqrt{(-4\cos 30^\circ)^2 + (-4\sin 30^\circ)^2 + (-6)^2}}$$

$$= \{-28.8\,\mathbf{i} - 16.6\,\mathbf{j} - 49.9\,\mathbf{k}\}\ \text{lb} \quad \textbf{Ans}$$

$$\mathbf{F}_C = 60\,\frac{(4\,\mathbf{j} - 6\,\mathbf{k})}{\sqrt{(4)^2 + (-6)^2}}$$

$$= \{33.3\,\mathbf{j} - 49.9\,\mathbf{k}\}\ \text{lb} \quad \textbf{Ans}$$

$$\mathbf{F}_R = \mathbf{F}_A + \mathbf{F}_B + \mathbf{F}_C = \{-149.8\,\mathbf{k}\}\ \text{lb}$$

$$F_R = 150\ \text{lb} \quad \textbf{Ans}$$

$$\alpha = 90^\circ \quad \textbf{Ans}$$

$$\beta = 90^\circ \quad \textbf{Ans}$$

$$\gamma = 180^\circ \quad \textbf{Ans}$$

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–94. The chandelier is supported by three chains which are concurrent at point O. If the resultant force at O has a magnitude of 130 lb and is directed along the negative z axis, determine the force in each chain.

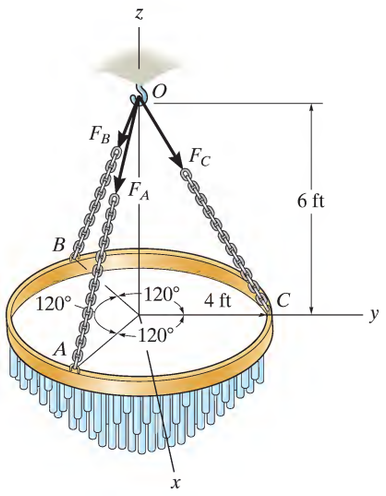

$$\mathbf{F}_C = F\frac{(4\mathbf{j} - 6\mathbf{k})}{\sqrt{4^2 + (-6)^2}} = 0.5547F\mathbf{j} - 0.8321F\mathbf{k}$$

$$\mathbf{F}_A = \mathbf{F}_B = \mathbf{F}_C$$

$$F_{R_z} = \Sigma F_z; \qquad 130 = 3(0.8321F)$$

$$F = 52.1 \text{ lb} \qquad \text{Ans}$$

2–95. Express force $\mathbf{F}$ as a Cartesian vector; then determine its coordinate direction angles.

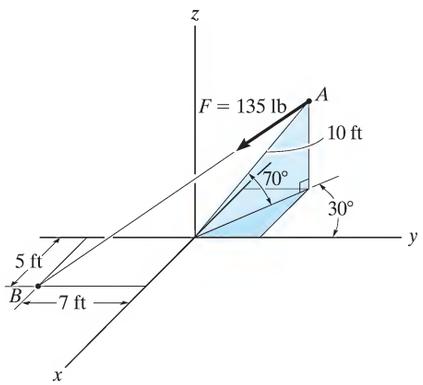

Unit Vector : The coordinates of point A are

$$A(-10\cos 70°\sin 30°,\ 10\cos 70°\cos 30°,\ 10\sin 70°)\text{ ft}$$
$$= A(-1.710,\ 2.962,\ 9.397)\text{ ft}$$

Then

$$\mathbf{r}_{AB} = \{[5-(-1.710)]\mathbf{i} + (-7-2.962)\mathbf{j} + (0-9.397)\mathbf{k}\}\text{ ft}$$
$$= \{6.710\mathbf{i} - 9.962\mathbf{j} - 9.397\mathbf{k}\}\text{ ft}$$
$$r_{AB} = \sqrt{6.710^2 + (-9.962)^2 + (-9.397)^2} = 15.250\text{ ft}$$

$$\mathbf{u}_{AB} = \frac{\mathbf{r}_{AB}}{r_{AB}} = \frac{6.710\mathbf{i} - 9.962\mathbf{j} - 9.397\mathbf{k}}{15.250}$$
$$= 0.4400\mathbf{i} - 0.6532\mathbf{j} - 0.6162\mathbf{k}$$

Force Vector :

$$\mathbf{F} = F\mathbf{u}_{AB} = 135\{0.4400\mathbf{i} - 0.6532\mathbf{j} - 0.6162\mathbf{k}\}\text{ lb}$$
$$= \{59.4\mathbf{i} - 88.2\mathbf{j} - 83.2\mathbf{k}\}\text{ lb} \qquad \text{Ans}$$

Coordinate Direction Angles : From the unit vector $\mathbf{u}_{AB}$ obtained above, we have

$$\cos\alpha = 0.4400 \qquad \alpha = 63.9° \qquad \text{Ans}$$
$$\cos\beta = -0.6532 \qquad \beta = 131° \qquad \text{Ans}$$
$$\cos\gamma = -0.6162 \qquad \gamma = 128° \qquad \text{Ans}$$

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***2–96.** The tower is held in place by three cables. If the force of each cable acting on the tower is shown, determine the magnitude and coordinate direction angles α, β, γ of the resultant force. Take $x = 20$ m, $y = 15$ m.

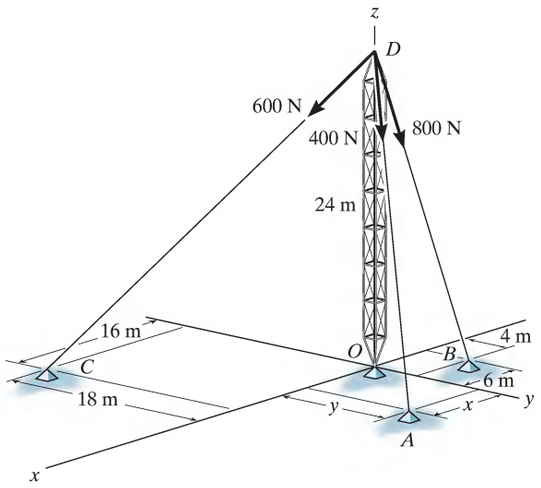

$$\mathbf{F}_{DA} = 400\left(\frac{20}{34.66}\mathbf{i} + \frac{15}{34.66}\mathbf{j} - \frac{24}{34.66}\mathbf{k}\right)\ \text{N}$$

$$\mathbf{F}_{DB} = 800\left(\frac{-6}{25.06}\mathbf{i} + \frac{4}{25.06}\mathbf{j} - \frac{24}{25.06}\mathbf{k}\right)\ \text{N}$$

$$\mathbf{F}_{DC} = 600\left(\frac{16}{34}\mathbf{i} - \frac{18}{34}\mathbf{j} - \frac{24}{34}\mathbf{k}\right)\text{N}$$

$$\mathbf{F}_R = \mathbf{F}_{DA} + \mathbf{F}_{DB} + \mathbf{F}_{DC}$$

$$= \{321.66\mathbf{i} - 16.82\mathbf{j} - 1466.71\mathbf{k}\}\ \text{N}$$

$$F_R = \sqrt{(321.66)^2 + (-16.82)^2 + (-1466.71)^2}$$

$$= 1501.66\ \text{N} = 1.50\ \text{kN} \qquad \textbf{Ans}$$

$$\alpha = \cos^{-1}\left(\frac{321.66}{1501.66}\right) = 77.6° \qquad \textbf{Ans}$$

$$\beta = \cos^{-1}\left(\frac{-16.82}{1501.66}\right) = 90.6° \qquad \textbf{Ans}$$

$$\gamma = \cos^{-1}\left(\frac{-1466.71}{1501.66}\right) = 168° \qquad \textbf{Ans}$$

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–97. The door is held opened by means of two chains. If the tension in AB and CD is $F_A = 300$ N and $F_C = 250$ N, respectively, express each of these forces in Cartesian vector form.

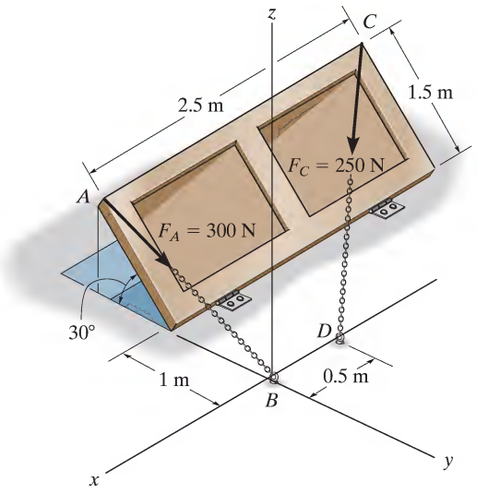

Unit Vector : First determine the position vector $\mathbf{r}_{AB}$ and $\mathbf{r}_{CD}$. The coordinates of points A and C are

$$A[0, -(1+1.5\cos 30°), 1.5\sin 30°]\ \text{m} = A(0, -2.299, 0.750)\ \text{m}$$
$$C[-2.50, -(1+1.5\cos 30°), 1.5\sin 300°]\ \text{m} = C(-2.50, -2.299, 0.750)\ \text{m}$$

Then

$$\mathbf{r}_{AB} = \{(0-0)\mathbf{i} + [0-(-2.299)]\mathbf{j} + (0-0.750)\mathbf{k}\}\ \text{m}$$
$$= \{2.299\mathbf{j} - 0.750\mathbf{k}\}\ \text{m}$$
$$r_{AB} = \sqrt{2.299^2 + (-0.750)^2} = 2.418\ \text{m}$$
$$\mathbf{u}_{AB} = \frac{\mathbf{r}_{AB}}{r_{AB}} = \frac{2.299\mathbf{j} - 0.750\mathbf{k}}{2.418} = 0.9507\mathbf{j} - 0.3101\mathbf{k}$$

$$\mathbf{r}_{CD} = \{[-0.5-(-2.5)]\mathbf{i} + [0-(-2.299)]\mathbf{j} + (0-0.750)\mathbf{k}\}\ \text{m}$$
$$= \{2.00\mathbf{i} + 2.299\mathbf{j} - 0.750\mathbf{k}\}\ \text{m}$$
$$r_{CD} = \sqrt{2.00^2 + 2.299^2 + (-0.750)^2} = 3.138\ \text{m}$$
$$\mathbf{u}_{CD} = \frac{\mathbf{r}_{CD}}{r_{CD}} = \frac{2.00\mathbf{i} + 2.299\mathbf{j} - 0.750\mathbf{k}}{3.138} = 0.6373\mathbf{i} + 0.7326\mathbf{j} - 0.2390\mathbf{k}$$

Force Vector :

$$\mathbf{F}_A = F_A\mathbf{u}_{AB} = 300\{0.9507\mathbf{j} - 0.3101\mathbf{k}\}\ \text{N}$$
$$= \{285.21\mathbf{j} - 93.04\mathbf{k}\}\ \text{N}$$
$$= \{285\mathbf{j} - 93.0\mathbf{k}\}\ \text{N} \qquad \textbf{Ans}$$

$$\mathbf{F}_C = F_C\mathbf{u}_{CD} = 250\{0.6373\mathbf{i} + 0.7326\mathbf{j} - 0.2390\mathbf{k}\}\ \text{N}$$
$$= \{159.33\mathbf{i} + 183.15\mathbf{j} - 59.75\mathbf{k}\}\ \text{N}$$
$$= \{159\mathbf{i} + 183\mathbf{j} - 59.7\mathbf{k}\}\ \text{N} \qquad \textbf{Ans}$$

2–98. The guy wires are used to support the telephone pole. Represent the force in each wire in Cartesian vector form. Neglect the diameter of the pole.

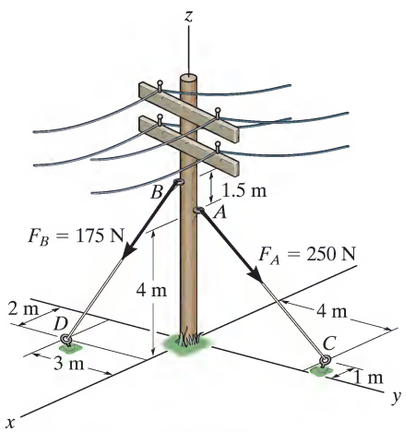

Unit Vector :

$$\mathbf{r}_{AC} = \{(-1-0)\mathbf{i} + (4-0)\mathbf{j} + (0-4)\mathbf{k}\}\ \text{m} = \{-1\mathbf{i} + 4\mathbf{j} - 4\mathbf{k}\}\ \text{m}$$
$$r_{AC} = \sqrt{(-1)^2 + 4^2 + (-4)^2} = 5.745\ \text{m}$$
$$\mathbf{u}_{AC} = \frac{\mathbf{r}_{AC}}{r_{AC}} = \frac{-1\mathbf{i} + 4\mathbf{j} - 4\mathbf{k}}{5.745} = -0.1741\mathbf{i} + 0.6963\mathbf{j} - 0.6963\mathbf{k}$$

$$\mathbf{r}_{BD} = \{(2-0)\mathbf{i} + (-3-0)\mathbf{j} + (0-5.5)\mathbf{k}\}\ \text{m} = \{2\mathbf{i} - 3\mathbf{j} - 5.5\mathbf{k}\}\ \text{m}$$
$$r_{BD} = \sqrt{2^2 + (-3)^2 + (-5.5)^2} = 6.576\ \text{m}$$
$$\mathbf{u}_{BD} = \frac{\mathbf{r}_{BD}}{r_{BD}} = \frac{2\mathbf{i} - 3\mathbf{j} - 5.5\mathbf{k}}{6.576} = 0.3041\mathbf{i} - 0.4562\mathbf{j} - 0.8363\mathbf{k}$$

Force Vector :

$$\mathbf{F}_A = F_A\mathbf{u}_{AC} = 250\{-0.1741\mathbf{i} + 0.6963\mathbf{j} - 0.6963\mathbf{k}\}\ \text{N}$$
$$= \{-43.52\mathbf{i} + 174.08\mathbf{j} - 174.08\mathbf{k}\}\ \text{N}$$
$$= \{-43.5\mathbf{i} + 174\mathbf{j} - 174\mathbf{k}\}\ \text{N} \qquad \textbf{Ans}$$

$$\mathbf{F}_B = F_B\mathbf{u}_{BD} = 175\{0.3041\mathbf{i} - 0.4562\mathbf{j} - 0.8363\mathbf{k}\}\ \text{N}$$
$$= \{53.22\mathbf{i} - 79.83\mathbf{j} - 146.36\mathbf{k}\}\ \text{N}$$
$$= \{53.2\mathbf{i} - 79.8\mathbf{j} - 146\mathbf{k}\}\ \text{N} \qquad \textbf{Ans}$$

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–99. Two cables are used to secure the overhang boom in position and support the 1500-N load. If the resultant force is directed along the boom from point A towards O, determine the magnitudes of the resultant force and forces $\mathbf{F}_B$ and $\mathbf{F}_C$. Set $x = 3$ m and $z = 2$ m.

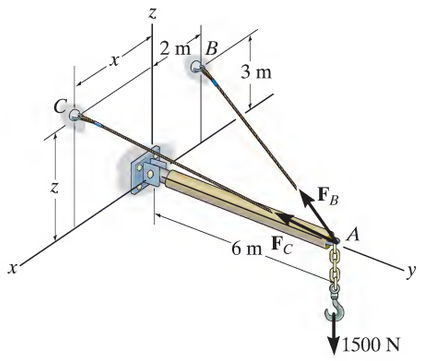

Force Vectors: The unit vectors $\mathbf{u}_B$ and $\mathbf{u}_C$ must be determined first. From Fig. *a*,

$$\mathbf{u}_B = \frac{\mathbf{r}_B}{r_B} = \frac{(-2-0)\mathbf{i}+(0-6)\mathbf{j}+(3-0)\mathbf{k}}{\sqrt{(-2-0)^2+(0-6)^2+(3-0)^2}} = -\frac{2}{7}\mathbf{i}-\frac{6}{7}\mathbf{j}+\frac{3}{7}\mathbf{k}$$

$$\mathbf{u}_C = \frac{\mathbf{r}_C}{r_C} = \frac{(3-0)\mathbf{i}+(0-6)\mathbf{j}+(2-0)\mathbf{k}}{\sqrt{(3-0)^2+(0-6)^2+(2-0)^2}} = \frac{3}{7}\mathbf{i}-\frac{6}{7}\mathbf{j}+\frac{2}{7}\mathbf{k}$$

Thus, the force vectors $\mathbf{F}_B$ and $\mathbf{F}_C$ are given by

$$\mathbf{F}_B = F_B\mathbf{u}_B = -\frac{2}{7}F_B\mathbf{i}-\frac{6}{7}F_B\mathbf{j}+\frac{3}{7}F_B\mathbf{k}$$

$$\mathbf{F}_C = F_C\mathbf{u}_C = \frac{3}{7}F_C\mathbf{i}-\frac{6}{7}F_C\mathbf{j}+\frac{2}{7}F_C\mathbf{k}$$

Since the resultant force $\mathbf{F}_R$ is directed along the negative y axis, and the load $\mathbf{W}$ is directed along the z axis, these two forces can be written as

$$\mathbf{F}_R = -F_R\mathbf{j} \qquad \text{and} \qquad \mathbf{W} = [-1500\mathbf{k}]\ \text{N}$$

Resultant Force: The vector addition of $\mathbf{F}_B$, $\mathbf{F}_C$, and $\mathbf{W}$ is equal to $\mathbf{F}_R$. Thus,

$$\mathbf{F}_R = \mathbf{F}_B + \mathbf{F}_C + \mathbf{W}$$

$$-F_R\mathbf{j} = \left(-\frac{2}{7}F_B\mathbf{i}-\frac{6}{7}F_B\mathbf{j}+\frac{3}{7}F_B\mathbf{k}\right)+\left(\frac{3}{7}F_C\mathbf{i}-\frac{6}{7}F_C\mathbf{j}+\frac{2}{7}F_C\mathbf{k}\right)+(-1500\mathbf{k})$$

$$-F_R\mathbf{j} = \left(-\frac{2}{7}F_B+\frac{3}{7}F_C\right)\mathbf{i}+\left(-\frac{6}{7}F_B-\frac{6}{7}F_C\right)\mathbf{j}+\left(\frac{3}{7}F_B+\frac{2}{7}F_C-1500\right)\mathbf{k}$$

Equating the $\mathbf{i}$, $\mathbf{j}$, and $\mathbf{k}$ components,

$$0 = -\frac{2}{7}F_B+\frac{3}{7}F_C \qquad (1)$$

$$-F_R = -\frac{6}{7}F_B-\frac{6}{7}F_C \qquad (2)$$

$$0 = \frac{3}{7}F_B+\frac{2}{7}F_C-1500 \qquad (3)$$

Solving Eqs. (1), (2), and (3) yields

$F_C = 1615.38\ \text{N} = 1.62\ \text{kN}$ **Ans.**

$F_B = 2423.08\ \text{N} = 2.42\ \text{kN}$ **Ans.**

$F_R = 3461.53\ \text{N} = 3.46\ \text{kN}$ **Ans.**

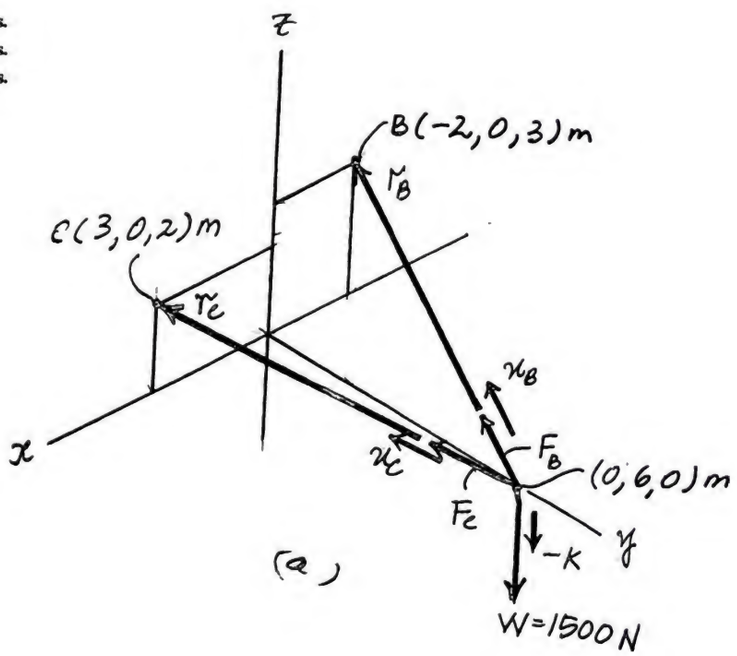

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***2–100.** Two cables are used to secure the overhang boom in position and support the 1500-N load. If the resultant force is directed along the boom from point A towards O, determine the values of x and z for the coordinates of point C and the magnitude of the resultant force. Set $F_B = 1610$ N and $F_C = 2400$ N.

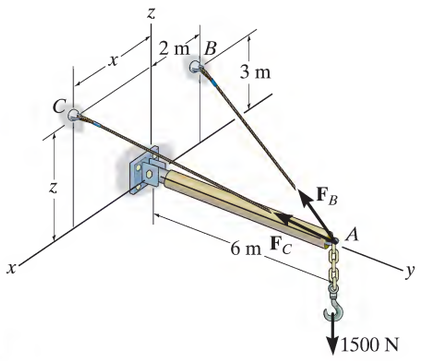

Force Vectors: From Fig. *a*,

$$\mathbf{u}_B = \frac{\mathbf{r}_B}{r_B} = \frac{(-2-0)\mathbf{i}+(0-6)\mathbf{j}+(3-0)\mathbf{k}}{\sqrt{(-2-0)^2+(0-6)^2+(3-0)^2}} = -\frac{2}{7}\mathbf{i}-\frac{6}{7}\mathbf{j}+\frac{3}{7}\mathbf{k}$$

$$\mathbf{u}_C = \frac{\mathbf{r}_C}{r_C} = \frac{(x-0)\mathbf{i}+(0-6)\mathbf{j}+(z-0)\mathbf{k}}{\sqrt{(x-0)^2+(0-6)^2+(z-0)^2}} = \frac{x}{\sqrt{x^2+z^2+36}}\mathbf{i}-\frac{6}{\sqrt{x^2+z^2+36}}\mathbf{j}+\frac{z}{\sqrt{x^2+z^2+36}}\mathbf{k}$$

Thus,

$$\mathbf{F}_B = F_B\mathbf{u}_B = 1610\left(-\frac{2}{7}\mathbf{i}-\frac{6}{7}\mathbf{j}+\frac{3}{7}\mathbf{k}\right) = [-460\mathbf{i}-1380\mathbf{j}+690\mathbf{k}]\text{N}$$

$$\mathbf{F}_C = F_C\mathbf{u}_C = 2400\left(\frac{x}{\sqrt{x^2+z^2+36}}\mathbf{i}-\frac{6}{\sqrt{x^2+z^2+36}}\mathbf{j}+\frac{z}{\sqrt{x^2+z^2+36}}\right)$$

$$= \frac{2400x}{\sqrt{x^2+z^2+36}}\mathbf{i}-\frac{14\,400}{\sqrt{x^2+z^2+36}}\mathbf{j}+\frac{2400z}{\sqrt{x^2+z^2+36}}$$

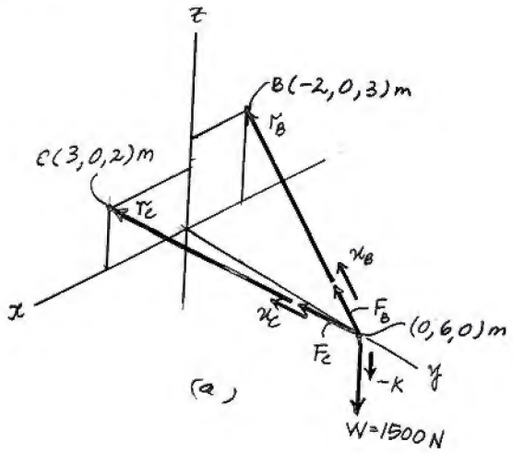

Since the resultant force $\mathbf{F}_R$ is directed along the negative y axis, and the load is directed along the z axis, these two forces can be written as

$$\mathbf{F}_R = -F_R\mathbf{j} \qquad \text{and} \qquad \mathbf{W} = [-1500\mathbf{k}]\text{ N}$$

Resultant Force:

$$\mathbf{F}_R = \mathbf{F}_B + \mathbf{F}_C + \mathbf{W}$$

$$-F_R\mathbf{j} = (-460\mathbf{i}-1380\mathbf{j}+690\mathbf{k})+\left(\frac{2400x}{\sqrt{x^2+z^2+36}}\mathbf{i}-\frac{14\,400}{\sqrt{x^2+z^2+36}}\mathbf{j}+\frac{2400z}{\sqrt{x^2+z^2+36}}\mathbf{k}\right)+(-1500\mathbf{k})$$

$$-F_R\mathbf{j} = \left(\frac{2400x}{\sqrt{x^2+z^2+36}}-460\right)\mathbf{i}-\left(\frac{14\,400}{\sqrt{x^2+z^2+36}}+1380\right)\mathbf{j}+\left(690+\frac{2400z}{\sqrt{x^2+z^2+36}}-1500\right)\mathbf{k}$$

Equating the **i**, **j**, and **k** components,

$$0 = \frac{2400x}{\sqrt{x^2+z^2+36}}-460 \qquad \frac{2400x}{\sqrt{x^2+z^2+36}} = 460 \qquad (1)$$

$$-F_R = -\left(\frac{14400}{\sqrt{x^2+z^2+36}}+1380\right) \qquad F_R = \frac{14400}{\sqrt{x^2+z^2+36}}+1380 \qquad (2)$$

$$0 = 690+\frac{2400z}{\sqrt{x^2+z^2+36}}-1500 \qquad \frac{2400z}{\sqrt{x^2+z^2+36}} = 810 \qquad (3)$$

Dividing Eq. (1) by Eq. (3), yields

$$x = 0.5679z \qquad (4)$$

Substituting Eq. (4) into Eq. (1), and solving

$$z = 2.197\text{ m} = 2.20\text{ m} \qquad \textbf{Ans.}$$

Substituting $z = 2.197$ m into Eq. (4), yields

$$x = 1.248\text{ m} = 1.25\text{ m} \qquad \textbf{Ans.}$$

Substituting $x = 1.248$ m and $z = 2.197$ m into Eq. (2), yields

$$F_R = 3591.85\text{ N} = 3.59\text{ kN} \qquad \textbf{Ans.}$$

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–101. The cable AO exerts a force on the top of the pole of $\mathbf{F} = \{-120\mathbf{i} - 90\mathbf{j} - 80\mathbf{k}\}$ lb. If the cable has a length of 34 ft, determine the height z of the pole and the location (x, y) of its base.

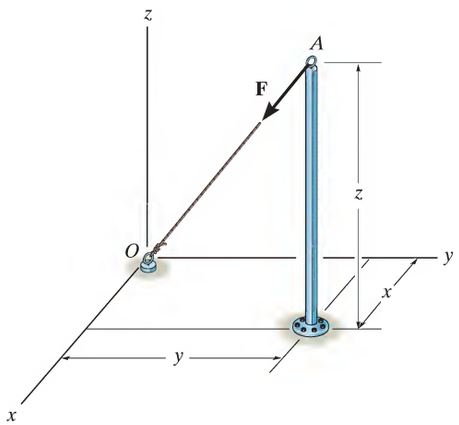

$$F = \sqrt{(-120)^2 + (-90)^2 + (-80)^2} = 170 \text{ lb}$$

$$\mathbf{u} = \frac{\mathbf{F}}{F} = -\frac{120}{170}\mathbf{i} - \frac{90}{170}\mathbf{j} - \frac{80}{170}\mathbf{k}$$

$$\mathbf{r} = 34\,\mathbf{u} = \{-24\,\mathbf{i} - 18\,\mathbf{j} - 16\,\mathbf{k}\} \text{ ft}$$

Thus,

$x = 24$ ft Ans

$y = 18$ ft Ans

$z = 16$ ft Ans

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–102. If the force in each chain has a magnitude of 450 lb, determine the magnitude and coordinate direction angles of the resultant force.

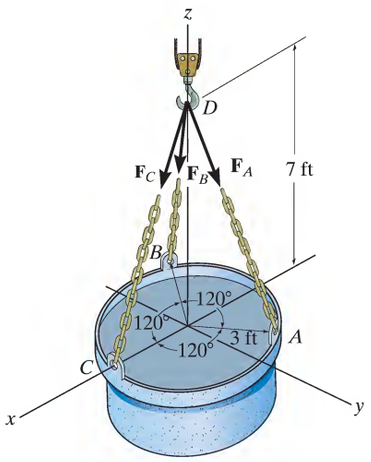

Force Vectors: The unit vectors $\mathbf{u}_A$, $\mathbf{u}_B$, and $\mathbf{u}_C$ must be determined first. From Fig. *a*,

$$\mathbf{u}_A = \frac{(-3\sin 30° - 0)\mathbf{i} + (3\cos 30° - 0)\mathbf{j} + (0-7)\mathbf{k}}{\sqrt{(-3\sin 30° - 0)^2 + (3\cos 30° - 0)^2 + (0-7)^2}} = -0.1970\mathbf{i} + 0.3411\mathbf{j} - 0.9191\mathbf{k}$$

$$\mathbf{u}_B = \frac{(-3\sin 30° - 0)\mathbf{i} + (-3\cos 30° - 0)\mathbf{j} + (0-7)\mathbf{k}}{\sqrt{(-3\sin 30° - 0)^2 + (-3\cos 30° - 0)^2 + (0-7)^2}} = -0.1970\mathbf{i} - 0.3411\mathbf{j} - 0.9191\mathbf{k}$$

$$\mathbf{u}_C = \frac{(3-0)\mathbf{i} + (0-0)\mathbf{j} + (0-7)\mathbf{k}}{\sqrt{(3-0)^2 + (0-0)^2 + (0-7)^2}} = 0.3939\mathbf{i} - 0.9191\mathbf{k}$$

Thus, the force vectors $\mathbf{F}_A$, $\mathbf{F}_B$, and $\mathbf{F}_C$ are given by

$$\mathbf{F}_A = F_A\mathbf{u}_A = 450(-0.1970\mathbf{i} + 0.3411\mathbf{j} - 0.9191\mathbf{k}) = \{-88.63\mathbf{i} + 153.51\mathbf{j} - 413.62\mathbf{k}\}\ \text{lb}$$

$$\mathbf{F}_B = F_B\mathbf{u}_B = 450(-0.1970\mathbf{i} - 0.3411\mathbf{j} - 0.9191\mathbf{k}) = \{-88.63\mathbf{i} - 153.51\mathbf{j} - 413.62\mathbf{k}\}\ \text{lb}$$

$$\mathbf{F}_C = F_C\mathbf{u}_C = 450(0.3939\mathbf{i} - 0.9191\mathbf{k}) = \{177.26\mathbf{i} - 413.62\mathbf{k}\}\ \text{lb}$$

Resultant Force:

$$\mathbf{F}_R = \mathbf{F}_A + \mathbf{F}_B + \mathbf{F}_C = (-88.63\mathbf{i} + 153.51\mathbf{j} - 413.62\mathbf{k}) + (-88.63\mathbf{i} - 153.51\mathbf{j} - 413.62\mathbf{k}) + (177.26\mathbf{i} - 413.62\mathbf{k})$$
$$= \{-1240.85\mathbf{k}\}\ \text{lb}$$

The magnitude of $\mathbf{F}_R$ is

$$F_R = \sqrt{(F_R)_x^2 + (F_R)_y^2 + (F_R)_z^2}$$
$$= \sqrt{0^2 + 0^2 + (-1240.85)^2} = 1240.85\ \text{lb} = 1.24\ \text{kip} \qquad \textbf{Ans.}$$

The coordinate direction angles of $\mathbf{F}_R$ are

$$\alpha = \cos^{-1}\left[\frac{(F_R)_x}{F_R}\right] = \cos^{-1}\left(\frac{0}{1240.85}\right) = 90° \qquad \textbf{Ans.}$$

$$\beta = \cos^{-1}\left[\frac{(F_R)_y}{F_R}\right] = \cos^{-1}\left(\frac{0}{1240.85}\right) = 90° \qquad \textbf{Ans.}$$

$$\gamma = \cos^{-1}\left[\frac{(F_R)_z}{F_R}\right] = \cos^{-1}\left(\frac{-1240.85}{1240.85}\right) = 180° \qquad \textbf{Ans.}$$

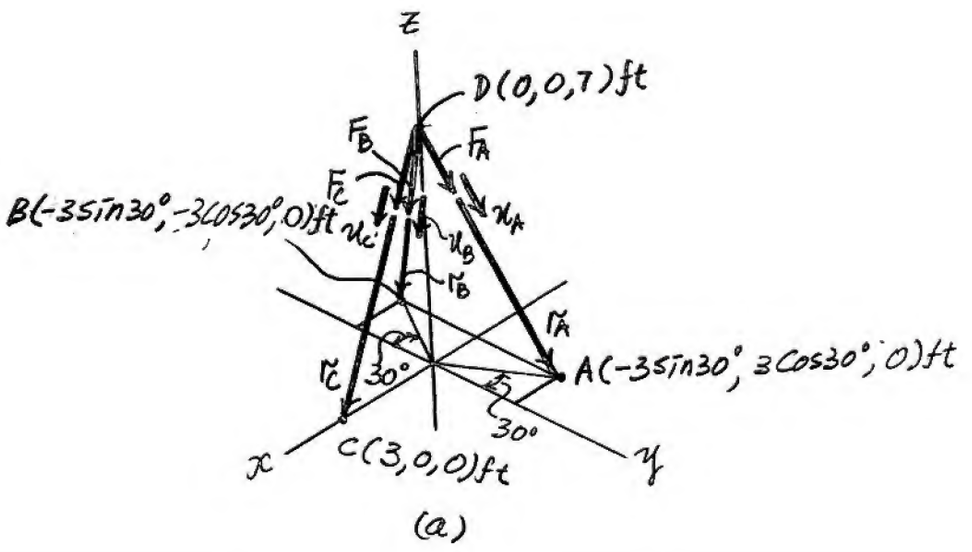

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–103. If the resultant of the three forces is $\mathbf{F}_R = \{-900\mathbf{k}\}$ lb, determine the magnitude of the force in each chain.

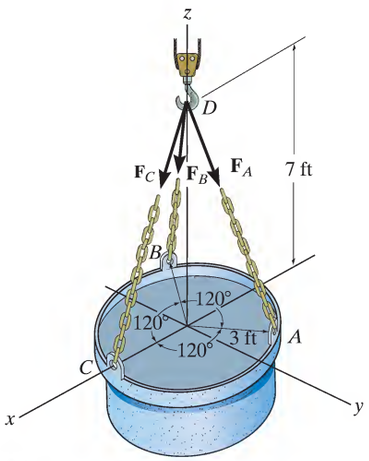

Force Vectors: The unit vectors $\mathbf{u}_A$, $\mathbf{u}_B$, and $\mathbf{u}_C$ must be determined first. From Fig. *a*,

$$\mathbf{u}_A = \frac{(-3\sin 30° - 0)\mathbf{i} + (3\cos 30° - 0)\mathbf{j} + (0-7)\mathbf{k}}{\sqrt{(-3\sin 30° - 0)^2 + (3\cos 30° - 0)^2 + (0-7)^2}} = -0.1970\mathbf{i} + 0.3411\mathbf{j} - 0.9191\mathbf{k}$$

$$\mathbf{u}_B = \frac{(-3\sin 30° - 0)\mathbf{i} + (-3\cos 30° - 0)\mathbf{j} + (0-7)\mathbf{k}}{\sqrt{(-3\sin 30° - 0)^2 + (-3\cos 30° - 0)^2 + (0-7)^2}} = -0.1970\mathbf{i} - 0.3411\mathbf{j} - 0.9191\mathbf{k}$$

$$\mathbf{u}_C = \frac{(3-0)\mathbf{i} + (0-0)\mathbf{j} + (0-7)\mathbf{k}}{\sqrt{(3-0)^2 + (0-0)^2 + (0-7)^2}} = 0.3939\mathbf{i} - 0.9191\mathbf{k}$$

Thus, the force vectors $\mathbf{F}_A$, $\mathbf{F}_B$, and $\mathbf{F}_C$ are given by

$$\mathbf{F}_A = F_A\mathbf{u}_A = -0.1970F_A\mathbf{i} + 0.3411F_A\mathbf{j} - 0.9191F_A\mathbf{k}$$
$$\mathbf{F}_B = F_B\mathbf{u}_B = -0.1970F_B\mathbf{i} - 0.3411F_B\mathbf{j} - 0.9191F_B\mathbf{k}$$
$$\mathbf{F}_C = F_C\mathbf{u}_C = 0.3939F_C\mathbf{i} - 0.9191F_C\mathbf{k}$$

Resultant Force: The vector addition of $\mathbf{F}_A$, $\mathbf{F}_B$, and $\mathbf{F}_C$ is equal to $\mathbf{F}_R$. Thus,

$$\mathbf{F}_R = \mathbf{F}_A + \mathbf{F}_B + \mathbf{F}_C$$
$$-900\mathbf{k} = (-0.1970F_A\mathbf{i} + 0.3411F_A\mathbf{j} - 0.9191F_A\mathbf{k}) + (-0.1970F_B\mathbf{i} - 0.3411F_B\mathbf{j} - 0.9191F_B\mathbf{k}) + (0.3939F_C\mathbf{i} - 0.9191F_C\mathbf{k})$$
$$-900\mathbf{k} = (-0.1970F_A - 0.1970F_B + 0.3939F_C)\mathbf{i} + (0.3411F_A - 0.3411F_B)\mathbf{j} + (-0.9191F_A - 0.9191F_B - 0.9191F_C)\mathbf{k}$$

Equating the **i**, **j**, and **k** components,

$$0 = -0.1970F_A - 0.1970F_B + 0.3939F_C \quad (1)$$
$$0 = 0.3411F_A - 0.3411F_B \quad (2)$$
$$-900\mathbf{k} = -0.9191F_A - 0.9191F_B - 0.9191F_C \quad (3)$$

Solving Eqs. (1), (2), and (3), yields

$$F_A = F_B = F_C = 326 \text{ lb}$$ **Ans.**

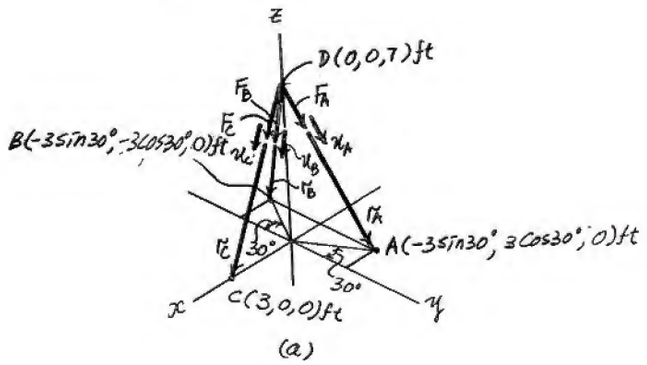

(a)

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***2–104.** The antenna tower is supported by three cables. If the forces of these cables acting on the antenna are $F_B = 520$ N, $F_C = 680$ N, and $F_D = 560$ N, determine the magnitude and coordinate direction angles of the resultant force acting at A.

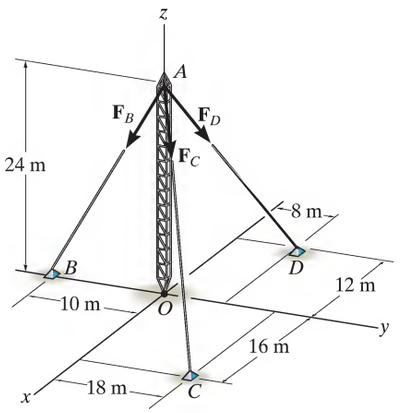

$$\mathbf{F}_B = 520\left(\frac{\mathbf{r}_{AB}}{r_{AB}}\right) = 520\left(-\frac{10}{26}\mathbf{j} - \frac{24}{26}\mathbf{k}\right) = -200\,\mathbf{j} - 480\,\mathbf{k}$$

$$\mathbf{F}_C = 680\left(\frac{\mathbf{r}_{AC}}{r_{AC}}\right) = 680\left(\frac{16}{34}\mathbf{i} + \frac{18}{34}\mathbf{j} - \frac{24}{34}\mathbf{k}\right) = 320\,\mathbf{i} + 360\,\mathbf{j} - 480\,\mathbf{k}$$

$$\mathbf{F}_D = 560\left(\frac{\mathbf{r}_{AD}}{r_{AD}}\right) = 560\left(-\frac{12}{28}\mathbf{i} + \frac{8}{28}\mathbf{j} - \frac{24}{28}\mathbf{k}\right) = -240\,\mathbf{i} + 160\,\mathbf{j} - 480\,\mathbf{k}$$

$$\mathbf{F}_R = \Sigma\mathbf{F} = \{80\,\mathbf{i} + 320\,\mathbf{j} - 1440\,\mathbf{k}\}\ \text{N}$$

$$F_R = \sqrt{(80)^2 + (320)^2 + (-1440)^2} = 1477.3 = 1.48\ \text{kN} \qquad \text{Ans}$$

$$\alpha = \cos^{-1}\left(\frac{80}{1477.3}\right) = 86.9^\circ \qquad \text{Ans}$$

$$\beta = \cos^{-1}\left(\frac{320}{1477.3}\right) = 77.5^\circ \qquad \text{Ans}$$

$$\gamma = \cos^{-1}\left(\frac{-1440}{1477.3}\right) = 167^\circ \qquad \text{Ans}$$

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–105. If the force in each cable tied to the bin is 70 lb, determine the magnitude and coordinate direction angles of the resultant force.

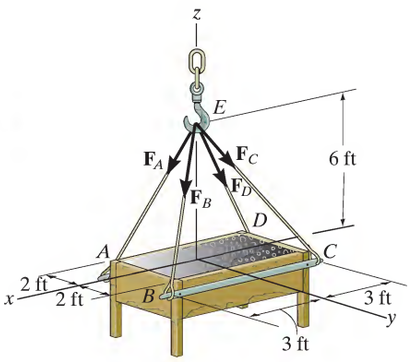

Force Vectors: The unit vectors $\mathbf{u}_A$, $\mathbf{u}_B$, $\mathbf{u}_C$ and $\mathbf{u}_D$ of $\mathbf{F}_A$, $\mathbf{F}_B$, $\mathbf{F}_C$ and $\mathbf{F}_D$ must be determined first. From Fig. *a*,

$$\mathbf{u}_A = \frac{\mathbf{r}_A}{r_A} = \frac{(3-0)\mathbf{i}+(-2-0)\mathbf{j}+(0-6)\mathbf{k}}{\sqrt{(3-0)^2+(-2-0)^2+(0-6)^2}} = \frac{3}{7}\mathbf{i}-\frac{2}{7}\mathbf{j}-\frac{6}{7}\mathbf{k}$$

$$\mathbf{u}_B = \frac{\mathbf{r}_B}{r_B} = \frac{(3-0)\mathbf{i}+(2-0)\mathbf{j}+(0-6)\mathbf{k}}{\sqrt{(3-0)^2+(2-0)^2+(0-6)^2}} = \frac{3}{7}\mathbf{i}+\frac{2}{7}\mathbf{j}-\frac{6}{7}\mathbf{k}$$

$$\mathbf{u}_C = \frac{\mathbf{r}_C}{r_C} = \frac{(-3-0)\mathbf{i}+(2-0)\mathbf{j}+(0-6)\mathbf{k}}{\sqrt{(-3-0)^2+(2-0)^2+(0-6)^2}} = -\frac{3}{7}\mathbf{i}+\frac{2}{7}\mathbf{j}-\frac{6}{7}\mathbf{k}$$

$$\mathbf{u}_D = \frac{\mathbf{r}_D}{r_D} = \frac{(-3-0)\mathbf{i}+(-2-0)\mathbf{j}+(0-6)\mathbf{k}}{\sqrt{(-3-0)^2+(-2-0)^2+(0-6)^2}} = -\frac{3}{7}\mathbf{i}-\frac{2}{7}\mathbf{j}-\frac{6}{7}\mathbf{k}$$

Thus, the force vectors $\mathbf{F}_A$, $\mathbf{F}_B$, $\mathbf{F}_C$ and $\mathbf{F}_D$ are given by

$$\mathbf{F}_A = F_A\mathbf{u}_A = 70\left(\frac{3}{7}\mathbf{i}-\frac{2}{7}\mathbf{j}-\frac{6}{7}\mathbf{k}\right) = [30\mathbf{i}-20\mathbf{j}-60\mathbf{k}]\text{ lb}$$

$$\mathbf{F}_B = F_B\mathbf{u}_B = 70\left(\frac{3}{7}\mathbf{i}+\frac{2}{7}\mathbf{j}-\frac{6}{7}\mathbf{k}\right) = [30\mathbf{i}+20\mathbf{j}-60\mathbf{k}]\text{ lb}$$

$$\mathbf{F}_C = F_C\mathbf{u}_C = 70\left(-\frac{3}{7}\mathbf{i}+\frac{2}{7}\mathbf{j}-\frac{6}{7}\mathbf{k}\right) = [-30\mathbf{i}+20\mathbf{j}-60\mathbf{k}]\text{ lb}$$

$$\mathbf{F}_D = F_D\mathbf{u}_D = 70\left(-\frac{3}{7}\mathbf{i}-\frac{2}{7}\mathbf{j}-\frac{6}{7}\mathbf{k}\right) = [-30\mathbf{i}-20\mathbf{j}-60\mathbf{k}]\text{ lb}$$

Resultant Force:

$$\mathbf{F}_R = \mathbf{F}_A+\mathbf{F}_B+\mathbf{F}_C+\mathbf{F}_D = (30\mathbf{i}-20\mathbf{j}-60\mathbf{k})+(30\mathbf{i}+20\mathbf{j}-60\mathbf{k})+(-30\mathbf{i}+20\mathbf{j}-60\mathbf{k})+(-30\mathbf{i}-20\mathbf{j}-60\mathbf{k})$$
$$= \{-240\mathbf{k}\}\text{ N}$$

The magnitude of $\mathbf{F}_R$ is

$$F_R = \sqrt{(F_R)_x^2+(F_R)_y^2+(F_R)_z^2}$$
$$= \sqrt{0+0+(-240)^2} = 240\text{ lb} \qquad \textbf{Ans.}$$

The coordinate direction angles of $\mathbf{F}_R$ are

$$\alpha = \cos^{-1}\left[\frac{(F_R)_x}{F_R}\right] = \cos^{-1}\left(\frac{0}{240}\right) = 90° \qquad \textbf{Ans.}$$

$$\beta = \cos^{-1}\left[\frac{(F_R)_y}{F_R}\right] = \cos^{-1}\left(\frac{0}{240}\right) = 90° \qquad \textbf{Ans.}$$

$$\gamma = \cos^{-1}\left[\frac{(F_R)_z}{F_R}\right] = \cos^{-1}\left(\frac{-240}{240}\right) = 180° \qquad \textbf{Ans.}$$

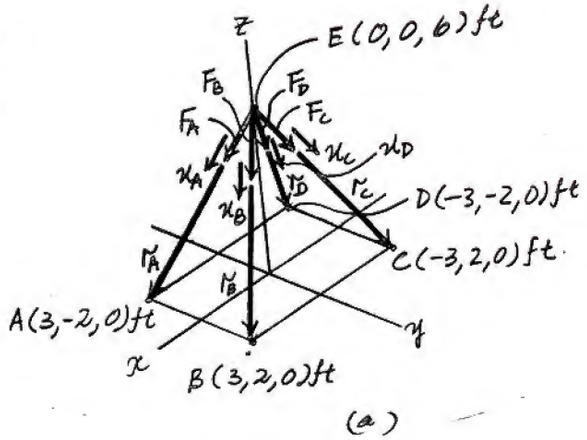

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–106. If the resultant of the four forces is $\mathbf{F}_R = \{-360\mathbf{k}\}$ lb, determine the tension developed in each cable. Due to symmetry, the tension in the four cables is the same.

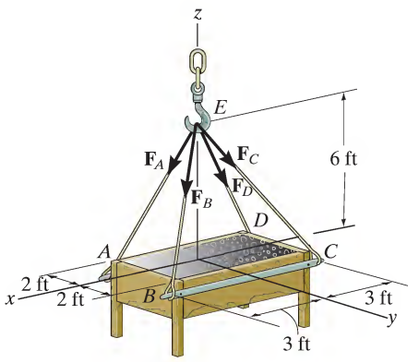

Force Vectors: The unit vectors $\mathbf{u}_A$, $\mathbf{u}_B$, $\mathbf{u}_C$ and $\mathbf{u}_D$ of $\mathbf{F}_A$, $\mathbf{F}_B$, $\mathbf{F}_C$ and $\mathbf{F}_D$ must be determined first.

From Fig. *a*,

$$\mathbf{u}_A = \frac{\mathbf{r}_A}{r_A} = \frac{(3-0)\mathbf{i}+(-2-0)\mathbf{j}+(0-6)\mathbf{k}}{\sqrt{(3-0)^2+(-2-0)^2+(0-6)^2}} = \frac{3}{7}\mathbf{i}-\frac{2}{7}\mathbf{j}-\frac{6}{7}\mathbf{k}$$

$$\mathbf{u}_B = \frac{\mathbf{r}_B}{r_B} = \frac{(3-0)\mathbf{i}+(2-0)\mathbf{j}+(0-6)\mathbf{k}}{\sqrt{(3-0)^2+(2-0)^2+(0-6)^2}} = \frac{3}{7}\mathbf{i}+\frac{2}{7}\mathbf{j}-\frac{6}{7}\mathbf{k}$$

$$\mathbf{u}_C = \frac{\mathbf{r}_C}{r_C} = \frac{(-3-0)\mathbf{i}+(2-0)\mathbf{j}+(0-6)\mathbf{k}}{\sqrt{(-3-0)^2+(2-0)^2+(0-6)^2}} = -\frac{3}{7}\mathbf{i}+\frac{2}{7}\mathbf{j}-\frac{6}{7}\mathbf{k}$$

$$\mathbf{u}_D = \frac{\mathbf{r}_D}{r_D} = \frac{(-3-0)\mathbf{i}+(-2-0)\mathbf{j}+(0-6)\mathbf{k}}{\sqrt{(-3-0)^2+(-2-0)^2+(0-6)^2}} = -\frac{3}{7}\mathbf{i}-\frac{2}{7}\mathbf{j}-\frac{6}{7}\mathbf{k}$$

Since the magnitudes of $\mathbf{F}_A$, $\mathbf{F}_B$, $\mathbf{F}_C$ and $\mathbf{F}_D$ are the same and denoted as $\mathbf{F}$, they can be written as

$$\mathbf{F}_A = F_A\mathbf{u}_A = F\left(\frac{3}{7}\mathbf{i}-\frac{2}{7}\mathbf{j}-\frac{6}{7}\mathbf{k}\right)$$

$$\mathbf{F}_B = F_B\mathbf{u}_B = F\left(\frac{3}{7}\mathbf{i}+\frac{2}{7}\mathbf{j}-\frac{6}{7}\mathbf{k}\right)$$

$$\mathbf{F}_C = F_C\mathbf{u}_C = F\left(-\frac{3}{7}\mathbf{i}+\frac{2}{7}\mathbf{j}-\frac{6}{7}\mathbf{k}\right)$$

$$\mathbf{F}_D = F_D\mathbf{u}_D = F\left(-\frac{3}{7}\mathbf{i}-\frac{2}{7}\mathbf{j}-\frac{6}{7}\mathbf{k}\right)$$

Resultant Force: The vector addition of $\mathbf{F}_A$, $\mathbf{F}_B$, $\mathbf{F}_C$ and $\mathbf{F}_D$ is equal to $\mathbf{F}_R$. Thus,

$$\mathbf{F}_R = \mathbf{F}_A + \mathbf{F}_B + \mathbf{F}_C + \mathbf{F}_D$$

$$\{-360\mathbf{k}\} = \left[F\left(\frac{3}{7}\mathbf{i}-\frac{2}{7}\mathbf{j}-\frac{6}{7}\mathbf{k}\right)\right]+\left[F\left(\frac{3}{7}\mathbf{i}+\frac{2}{7}\mathbf{j}-\frac{6}{7}\mathbf{k}\right)\right]+\left[F\left(-\frac{3}{7}\mathbf{i}+\frac{2}{7}\mathbf{j}-\frac{6}{7}\mathbf{k}\right)\right]+\left[F\left(-\frac{3}{7}\mathbf{i}-\frac{2}{7}\mathbf{j}-\frac{6}{7}\mathbf{k}\right)\right]$$

$$-360\mathbf{k} = -\frac{24}{7}F\mathbf{k}$$

Thus,

$$360 = \frac{24}{7}F \qquad F = 105 \text{ lb} \qquad \textbf{Ans.}$$

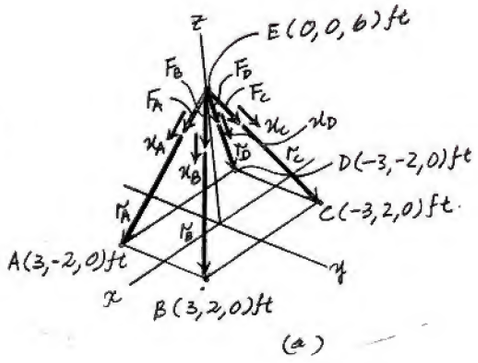

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–107. The pipe is supported at its end by a cord AB. If the cord exerts a force of $F = 12$ lb on the pipe at A, express this force as a Cartesian vector.

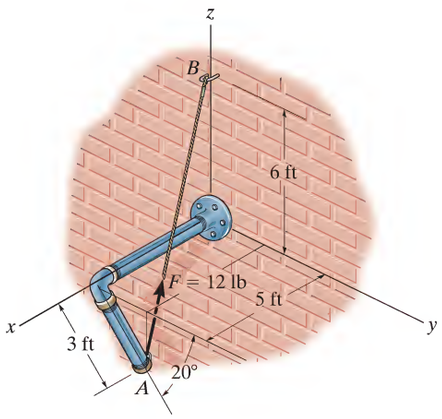

Unit Vector : The coordinates of point A are

$$A(5,\ 3\cos 20°,\ -3\sin 20°)\ \text{ft} = A(5.00,\ 2.819,\ -1.026)\ \text{ft}$$

Then

$$\mathbf{r}_{AB} = \{(0-5.00)\mathbf{i} + (0-2.819)\mathbf{j} + [6-(-1.026)]\mathbf{k}\}\ \text{ft}$$
$$= \{-5.00\mathbf{i} - 2.819\mathbf{j} + 7.026\mathbf{k}\}\ \text{ft}$$
$$r_{AB} = \sqrt{(-5.00)^2 + (-2.819)^2 + 7.026^2} = 9.073\ \text{ft}$$

$$\mathbf{u}_{AB} = \frac{\mathbf{r}_{AB}}{r_{AB}} = \frac{-5.00\mathbf{i} - 2.819\mathbf{j} + 7.026\mathbf{k}}{9.073}$$
$$= -0.5511\mathbf{i} - 0.3107\mathbf{j} + 0.7744\mathbf{k}$$

Force Vector :

$$\mathbf{F} = F\mathbf{u}_{AB} = 12\{-0.5511\mathbf{i} - 0.3107\mathbf{j} + 0.7744\mathbf{k}\}\ \text{lb}$$
$$= \{-6.61\mathbf{i} - 3.73\mathbf{j} + 9.29\mathbf{k}\}\ \text{lb}$$ **Ans**

***2–108.** The load at A creates a force of 200 N in wire AB. Express this force as a Cartesian vector, acting on A and directed towards B.

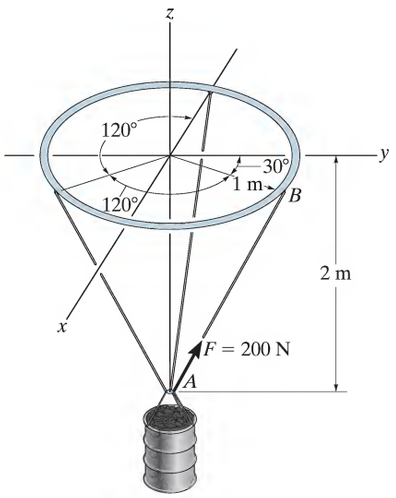

$$\mathbf{r}_{AB} = (1\sin 30° - 0)\mathbf{i} + (1\cos 30° - 0)\mathbf{j} + (2-0)\mathbf{k}$$
$$= \{0.5\,\mathbf{i} + 0.866\,\mathbf{j} + 2\mathbf{k}\}\ \text{m}$$

$$r_{AB} = \sqrt{(0.5)^2 + (0.866)^2 + (2)^2} = 2.236\ \text{m}$$

$$\mathbf{u}_{AB} = \left(\frac{\mathbf{r}_{AB}}{r_{AB}}\right) = 0.2236\mathbf{i} + 0.3873\,\mathbf{j} + 0.8944\,\mathbf{k}$$

$$\mathbf{F} = 200\,\mathbf{u}_{AB} = \{44.7\,\mathbf{i} + 77.5\,\mathbf{j} + 179\,\mathbf{k}\}\ \text{N}$$ **Ans**

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–109. The cylindrical plate is subjected to the three cable forces which are concurrent at point D. Express each force which the cables exert on the plate as a Cartesian vector, and determine the magnitude and coordinate direction angles of the resultant force.

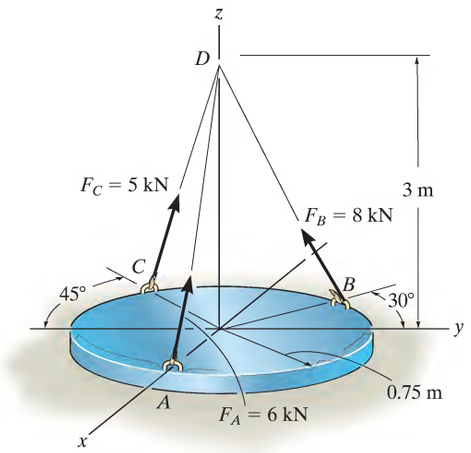

$\mathbf{r}_A = (0-0.75)\mathbf{i}+(0-0)\mathbf{j}+(3-0)\mathbf{k} = \{-0.75\,\mathbf{i}+0\,\mathbf{j}+3\,\mathbf{k}\}$ m

$r_A = \sqrt{(-0.75)^2+0^2+3^2} = 3.0923$ m

$$\mathbf{F}_A = F_A\left(\frac{\mathbf{r}_A}{r_A}\right) = 6\left(\frac{-0.75\,\mathbf{i}+3\,\mathbf{k}}{3.0923}\right)$$

$= \{-1.4552\,\mathbf{i}+5.8209\,\mathbf{k}\}$ kN

$= \{-1.46\,\mathbf{i}+5.82\,\mathbf{k}\}$ kN Ans

$\mathbf{r}_C = [0-(-0.75\sin 45°)]\mathbf{i}+[0-(-0.75\cos 45°)]\mathbf{j}+(3-0)\mathbf{k}$

$= \{0.5303\,\mathbf{i}+0.5303\,\mathbf{j}+3\,\mathbf{k}\}$ m

$r_C = \sqrt{(0.5303)^2+(0.5303)^2+3^2} = 3.0923$ m

$$\mathbf{F}_C = F_C\left(\frac{\mathbf{r}_C}{r_C}\right) = 5\left(\frac{0.5303\,\mathbf{i}+0.5303\,\mathbf{j}+3\,\mathbf{k}}{3.0923}\right)$$

$= \{0.8575\,\mathbf{i}+0.8575\,\mathbf{j}+4.8507\,\mathbf{k}\}$ kN

$= \{0.857\,\mathbf{i}+0.857\,\mathbf{j}+4.85\,\mathbf{k}\}$ kN Ans

$\mathbf{r}_B = [0-(-0.75\sin 30°)]\mathbf{i}+(0-0.75\cos 30°)\mathbf{j}+(3-0)\mathbf{k}$

$= \{0.375\,\mathbf{i}-0.6495\,\mathbf{j}+3\,\mathbf{k}\}$ m

$r_B = \sqrt{(0.375)^2+(-0.6495)^2+3^2} = 3.0923$ m

$$\mathbf{F}_B = F_B\left(\frac{\mathbf{r}_B}{r_B}\right) = 8\left(\frac{0.375\,\mathbf{i}-0.6495\,\mathbf{j}+3\,\mathbf{k}}{3.0923}\right)$$

$= \{0.9701\mathbf{i}-1.6803\mathbf{j}+7.7611\mathbf{k}\}$ kN

$= \{0.970\mathbf{i}-1.68\mathbf{j}+7.76\mathbf{k}\}$ kN Ans

$\mathbf{F}_R = \mathbf{F}_A+\mathbf{F}_B+\mathbf{F}_C$

$= \{-1.4552\,\mathbf{i}+5.8209\,\mathbf{k}\}+\{0.9701\,\mathbf{i}-1.6803\,\mathbf{j}+7.7611\mathbf{k}\}$

$+\{0.8575\,\mathbf{i}+0.8575\,\mathbf{j}+4.8507\,\mathbf{k}\}$

$= \{0.3724\,\mathbf{i}-0.8228\,\mathbf{j}+18.4327\,\mathbf{k}\}$ kN

$F_R = \sqrt{(0.3724)^2+(-0.8228)^2+(18.4327)^2}$

$= 18.4548$ kN $= 18.5$ kN Ans

$$\mathbf{u}_R = \frac{\mathbf{F}_R}{F_R} = \frac{0.3724\mathbf{i}-0.8228\mathbf{j}+18.4327\mathbf{k}}{18.4548}$$

$= 0.02018\mathbf{i}-0.04459\mathbf{j}+0.9988\mathbf{k}$

$\cos\alpha = 0.02018$ $\alpha = 88.8°$ Ans

$\cos\beta = -0.04458$ $\beta = 92.6°$ Ans

$\cos\gamma = 0.9988$ $\gamma = 2.81°$ Ans

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–110. The cable attached to the shear-leg derrick exerts a force on the derrick of $F = 350$ lb. Express this force as a Cartesian vector.

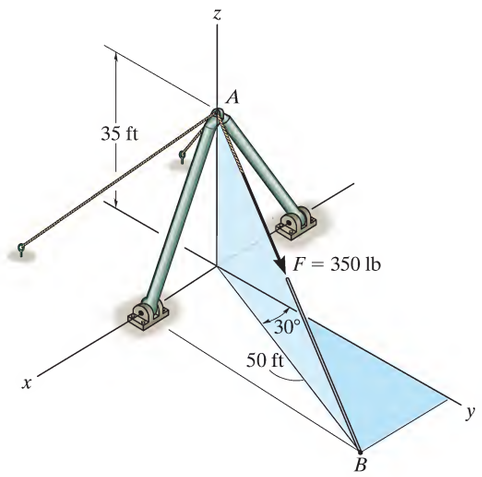

Unit Vector : The coordinates of point B are

$$B(50\sin 30°,\ 50\cos 30°,\ 0)\ \text{ft} = B(25.0,\ 43.301,\ 0)\ \text{ft}$$

Then

$$\mathbf{r}_{AB} = \{(25.0-0)\mathbf{i} + (43.301-0)\mathbf{j} + (0-35)\mathbf{k}\}\ \text{ft}$$
$$= \{25.0\mathbf{i} + 43.301\mathbf{j} - 35.0\mathbf{k}\}\ \text{ft}$$
$$r_{AB} = \sqrt{25.0^2 + 43.301^2 + (-35.0)^2} = 61.033\ \text{ft}$$

$$\mathbf{u}_{AB} = \frac{\mathbf{r}_{AB}}{r_{AB}} = \frac{25.0\mathbf{i} + 43.301\mathbf{j} - 35.0\mathbf{k}}{61.033}$$
$$= 0.4096\mathbf{i} + 0.7094\mathbf{j} - 0.5735\mathbf{k}$$

Force Vector :

$$\mathbf{F} = F\mathbf{u}_{AB} = 350\{0.4096\mathbf{i} + 0.7094\mathbf{j} - 0.5735\mathbf{k}\}\ \text{lb}$$
$$= \{143\mathbf{i} + 248\mathbf{j} - 201\mathbf{k}\}\ \text{lb} \qquad \textbf{Ans}$$

2–111. Given the three vectors A, B, and D, show that $\mathbf{A}\cdot(\mathbf{B}+\mathbf{D}) = (\mathbf{A}\cdot\mathbf{B}) + (\mathbf{A}\cdot\mathbf{D})$.

Since the component of $(\mathbf{B}+\mathbf{D})$ is equal to the sum of the components of $\mathbf{B}$ and $\mathbf{D}$, then

$$\mathbf{A}\cdot(\mathbf{B}+\mathbf{D}) = \mathbf{A}\cdot\mathbf{B} + \mathbf{A}\cdot\mathbf{D} \qquad \text{(QED)}$$



Also,

$$\mathbf{A}\cdot(\mathbf{B}+\mathbf{D}) = (A_x\mathbf{i} + A_y\mathbf{j} + A_z\mathbf{k})\cdot[(B_x + D_x)\mathbf{i} + (B_y + D_y)\mathbf{j} + (B_z + D_z)\mathbf{k}]$$

$$= A_x(B_x + D_x) + A_y(B_y + D_y) + A_z(B_z + D_z)$$

$$= (A_xB_x + A_yB_y + A_zB_z) + (A_xD_x + A_yD_y + A_zD_z)$$

$$= (\mathbf{A}\cdot\mathbf{B}) + (\mathbf{A}\cdot\mathbf{D}) \qquad \text{(QED)}$$

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***2–112.** Determine the projected component of the force $F_{AB} = 560$ N acting along cable AC. Express the result as a Cartesian vector.

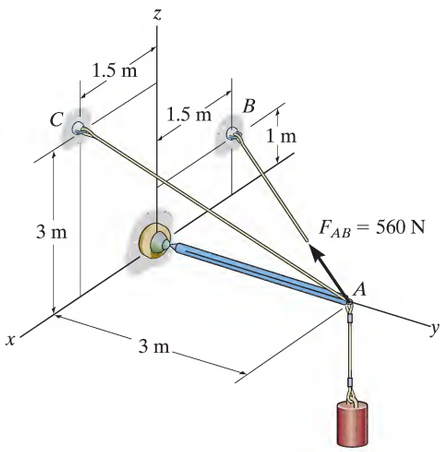

Force Vectors: The unit vectors $\mathbf{u}_{AB}$ and $\mathbf{u}_{AC}$ must be determined first. From Fig. *a*,

$$\mathbf{u}_{AB} = \frac{\mathbf{r}_{AB}}{r_{AB}} = \frac{(-1.5-0)\mathbf{i}+(0-3)\mathbf{j}+(1-0)\mathbf{k}}{\sqrt{(-1.5-0)^2+(0-3)^2+(1-0)^2}} = -\frac{3}{7}\mathbf{i}-\frac{6}{7}\mathbf{j}+\frac{2}{7}\mathbf{k}$$

$$\mathbf{u}_{AC} = \frac{\mathbf{r}_{AC}}{r_{AC}} = \frac{(1.5-0)\mathbf{i}+(0-3)\mathbf{j}+(3-0)\mathbf{k}}{\sqrt{(1.5-0)^2+(0-3)^2+(3-0)^2}} = \frac{1}{3}\mathbf{i}-\frac{2}{3}\mathbf{j}+\frac{2}{3}\mathbf{k}$$

Thus, the force vector $\mathbf{F}_{AB}$ is given by

$$\mathbf{F}_{AB} = F_{AB}\,\mathbf{u}_{AB} = 560\left(-\frac{3}{7}\mathbf{i}-\frac{6}{7}\mathbf{j}+\frac{2}{7}\mathbf{k}\right) = [-240\mathbf{i}-480\mathbf{j}+160\mathbf{k}]\,\text{N}$$

Vector Dot Product: The magnitude of the projected component of $\mathbf{F}_{AB}$ is

$$(F_{AB})_{AC} = \mathbf{F}_{AB}\cdot\mathbf{u}_{AC} = (-240\mathbf{i}-480\mathbf{j}+160\mathbf{k})\cdot\left(\frac{1}{3}\mathbf{i}-\frac{2}{3}\mathbf{j}+\frac{2}{3}\mathbf{k}\right)$$

$$= (-240)\left(\frac{1}{3}\right)+(-480)\left(-\frac{2}{3}\right)+160\left(\frac{2}{3}\right)$$

$$= 346.67\,\text{N}$$

Thus, $(\mathbf{F}_{AB})_{AC}$ expressed in Cartesian vector form is

$$(\mathbf{F}_{AB})_{AC} = (F_{AB})_{AC}\,\mathbf{u}_{AC} = 346.67\left(\frac{1}{3}\mathbf{i}-\frac{2}{3}\mathbf{j}+\frac{2}{3}\mathbf{k}\right)$$

$$= [116\mathbf{i}-231\mathbf{j}+231\mathbf{k}]\,\text{N} \qquad \textbf{Ans.}$$

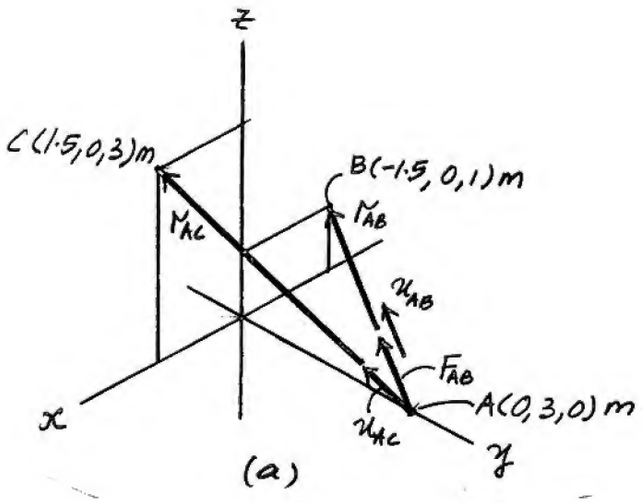

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–113. Determine the magnitudes of the components of force $F = 56$ N acting along and perpendicular to line AO.

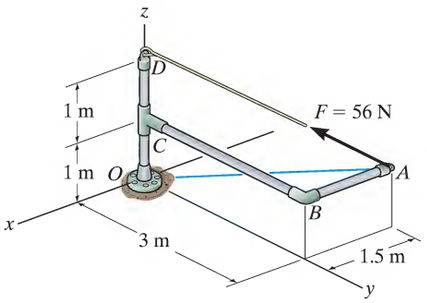

Unit Vectors: The unit vectors $\mathbf{u}_{AD}$ and $\mathbf{u}_{AO}$ must be determined first. From Fig. *a*,

$$\mathbf{u}_{AD} = \frac{\mathbf{r}_{AD}}{r_{AD}} = \frac{[0-(-1.5)]\mathbf{i}+(0-3)\mathbf{j}+(2-1)\mathbf{k}}{\sqrt{[0-(-1.5)]^2+(0-3)^2+(2-1)^2}} = \frac{3}{7}\mathbf{i}-\frac{6}{7}\mathbf{j}+\frac{2}{7}\mathbf{k}$$

$$\mathbf{u}_{AO} = \frac{\mathbf{r}_{AO}}{r_{AO}} = \frac{[0-(-1.5)]\mathbf{i}+(0-3)\mathbf{j}+(0-1)\mathbf{k}}{\sqrt{[0-(-1.5)]^2+(0-3)^2+(0-1)^2}} = \frac{3}{7}\mathbf{i}-\frac{6}{7}\mathbf{j}-\frac{2}{7}\mathbf{k}$$

Thus, the force vector $\mathbf{F}$ is given by

$$\mathbf{F} = F\mathbf{u}_{AD} = 56\left(\frac{3}{7}\mathbf{i}-\frac{6}{7}\mathbf{j}+\frac{2}{7}\mathbf{k}\right) = [24\mathbf{i}-48\mathbf{j}+16\mathbf{k}]\text{N}$$

Vector Dot Product: The magnitude of the projected component of $\mathbf{F}$ parallel to line AO is

$$(\mathbf{F}_{AO})_{\text{paral}} = \mathbf{F}\cdot\mathbf{u}_{AO} = (24\mathbf{i}-48\mathbf{j}+16\mathbf{k})\cdot\left(\frac{3}{7}\mathbf{i}-\frac{6}{7}\mathbf{j}-\frac{2}{7}\mathbf{k}\right)$$

$$= (24)\left(\frac{3}{7}\right)+(-48)\left(-\frac{6}{7}\right)+(16)\left(-\frac{2}{7}\right)$$

$$= 46.86\text{ N} = 46.9\text{ N} \qquad \textbf{Ans.}$$

The component of $\mathbf{F}$ perpendicular to line AO is

$$(\mathbf{F}_{AO})_{\text{per}} = \sqrt{F^2-(F_{AO})_{\text{paral}}}$$

$$= \sqrt{56^2-46.86^2}$$

$$= 30.7\text{ N} \qquad \textbf{Ans.}$$

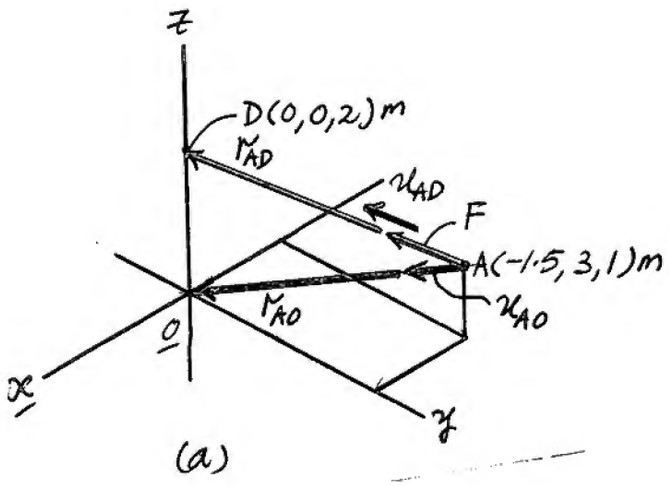

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–114. Determine the length of side BC of the triangular plate. Solve the problem by finding the magnitude of $\mathbf{r}_{BC}$; then check the result by first finding θ, r_{AB}, and r_{AC} and then using the cosine law.

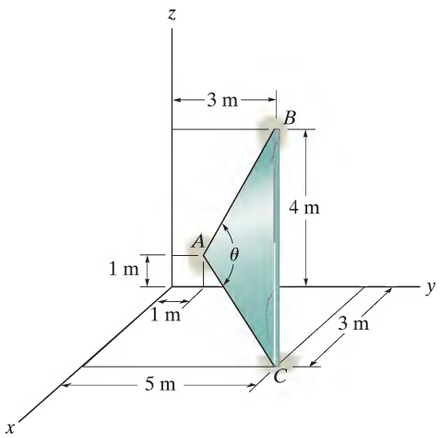

$\mathbf{r}_{BC} = \{3\,\mathbf{i} + 2\,\mathbf{j} - 4\,\mathbf{k}\}$ m

$r_{BC} = \sqrt{(3)^2 + (2)^2 + (-4)^2} = 5.39$ m **Ans**

Also,

$\mathbf{r}_{AC} = \{3\,\mathbf{i} + 4\,\mathbf{j} - 1\,\mathbf{k}\}$ m

$r_{AC} = \sqrt{(3)^2 + (4)^2 + (-1)^2} = 5.0990$ m

$\mathbf{r}_{AB} = \{2\,\mathbf{j} + 3\,\mathbf{k}\}$ m

$r_{AB} = \sqrt{(2)^2 + (3)^2} = 3.6056$ m

$\mathbf{r}_{AC} \cdot \mathbf{r}_{AB} = 0 + 4(2) + (-1)(3) = 5$

$$\theta = \cos^{-1}\left(\frac{\mathbf{r}_{AC} \cdot \mathbf{r}_{AB}}{r_{AC} r_{AB}}\right) = \cos^{-1}\frac{5}{(5.0990)(3.6056)}$$

$\theta = 74.219°$

$$r_{BC} = \sqrt{(5.0990)^2 + (3.6056)^2 - 2(5.0990)(3.6056)\cos 74.219°}$$

$r_{BC} = 5.39$ m **Ans**

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–115. Determine the magnitudes of the components of $F = 600$ N acting along and perpendicular to segment DE of the pipe assembly.

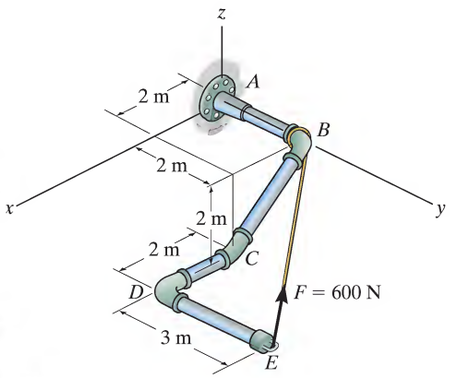

Unit Vectors: The unit vectors $\mathbf{u}_{EB}$ and $\mathbf{u}_{ED}$ must be determined first. From Fig. *a*,

$$\mathbf{u}_{EB} = \frac{\mathbf{r}_{EB}}{r_{EB}} = \frac{(0-4)\mathbf{i} + (2-5)\mathbf{j} + [0-(-2)]\mathbf{k}}{\sqrt{(0-4)^2 + (2-5)^2 + [0-(-2)]^2}} = -0.7428\mathbf{i} - 0.5571\mathbf{j} + 0.3714\mathbf{k}$$

$$\mathbf{u}_{ED} = -\mathbf{j}$$

Thus, the force vector $\mathbf{F}$ is given by

$$\mathbf{F} = F\mathbf{u}_{EB} = 600(-0.7428\mathbf{i} - 0.5571\mathbf{j} + 0.3714\mathbf{k}) = [-445.66\mathbf{i} - 334.25\mathbf{j} + 222.83\mathbf{k}]\ \text{N}$$

Vector Dot Product: The magnitude of the component of $\mathbf{F}$ *parallel* to segment DE of the pipe assembly is

$$(F_{ED})_{\text{paral}} = \mathbf{F} \cdot \mathbf{u}_{ED} = (-445.66\mathbf{i} - 334.25\mathbf{j} + 222.83\mathbf{k}) \cdot (-\mathbf{j})$$
$$= (-445.66)(0) + (-334.25)(-1) + (222.83)(0)$$
$$= 334.25 = 334\ \text{N} \qquad \textbf{Ans.}$$

The component of $\mathbf{F}$ perpendicular to segment DE of the pipe assembly is

$$(F_{ED})_{\text{per}} = \sqrt{F^2 - (F_{ED})_{\text{paral}}^2} = \sqrt{600^2 - 334.25^2} = 498\ \text{N} \qquad \textbf{Ans.}$$

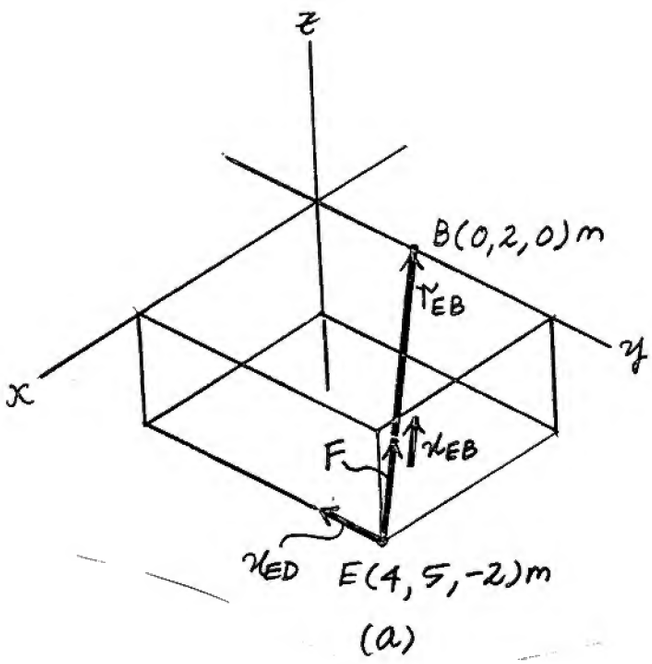

(a)

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

*2–116. Two forces act on the hook. Determine the angle θ between them. Also, what are the projections of $\mathbf{F}_1$ and $\mathbf{F}_2$ along the y axis?

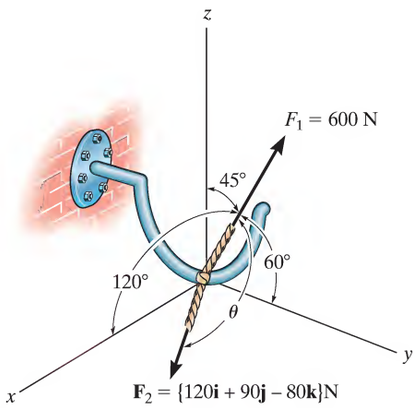

$\mathbf{F}_1 = 600\cos 120°\,\mathbf{i} + 600\cos 60°\,\mathbf{j} + 600\cos 45°\,\mathbf{k}$

$= -300\,\mathbf{i} + 300\,\mathbf{j} + 424.3\,\mathbf{k}$; $F_1 = 600$ N

$\mathbf{F}_2 = 120\,\mathbf{i} + 90\,\mathbf{j} - 80\,\mathbf{k}$; $F_2 = 170$ N

$\mathbf{F}_1 \cdot \mathbf{F}_2 = (-300)(120) + (300)(90) + (424.3)(-80) = -42\,944$

$\theta = \cos^{-1}\left(\dfrac{-42\,944}{(170)(600)}\right) = 115°$ Ans

$\mathbf{u} = \mathbf{j}$

So,

$F_{1_y} = \mathbf{F}_1 \cdot \mathbf{j} = (300)(1) = 300$ N Ans

$F_{2_y} = \mathbf{F}_2 \cdot \mathbf{j} = (90)(1) = 90$ N Ans

•2–117. Two forces act on the hook. Determine the magnitude of the projection of $\mathbf{F}_2$ along $\mathbf{F}_1$.

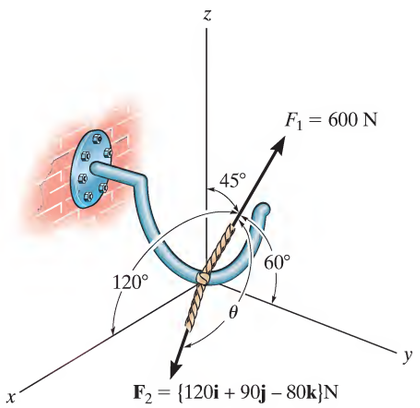

$\mathbf{u}_1 = \cos 120°\,\mathbf{i} + \cos 60°\,\mathbf{j} + \cos 45°\,\mathbf{k}$

$\text{Proj}\,F_2 = \mathbf{F}_2 \cdot \mathbf{u}_1 = (120)(\cos 120°) + (90)(\cos 60°) + (-80)(\cos 45°)$

$|\text{Proj}\,F_2| = 71.6$ N Ans

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–118. Determine the projection of force $F = 80$ N along line BC. Express the result as a Cartesian vector.

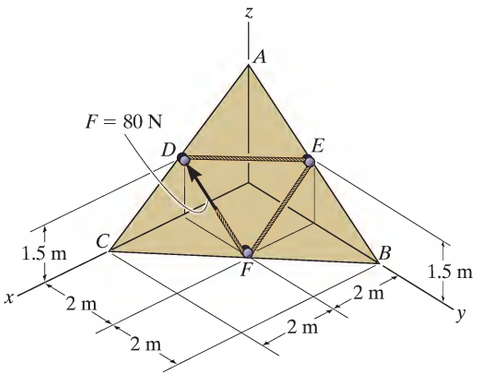

Unit Vectors: The unit vectors $\mathbf{u}_{FD}$ and $\mathbf{u}_{FC}$ must be determined first. From Fig. *a*,

$$\mathbf{u}_{FD} = \frac{\mathbf{r}_{FD}}{r_{FD}} = \frac{(2-2)\mathbf{i}+(0-2)\mathbf{j}+(1.5-0)\mathbf{k}}{\sqrt{(2-2)^2+(0-2)^2+(1.5-0)^2}} = -\frac{4}{5}\mathbf{j}+\frac{3}{5}\mathbf{k}$$

$$\mathbf{u}_{FC} = \frac{\mathbf{r}_{FC}}{r_{FC}} = \frac{(4-2)\mathbf{i}+(0-2)\mathbf{j}+(0-0)\mathbf{k}}{\sqrt{(4-2)^2+(0-2)^2+(0-0)^2}} = 0.7071\mathbf{i}-0.7071\mathbf{j}$$

Thus, the force vector $\mathbf{F}$ is given by

$$\mathbf{F} = F\mathbf{u}_{FD} = 80\left(-\frac{4}{5}\mathbf{j}+\frac{3}{5}\mathbf{k}\right) = [-64\mathbf{j}+48\mathbf{k}]\,\text{N}$$

Vector Dot Product: The magnitude of the projected component of $\mathbf{F}$ along line BC is

$$F_{BC} = \mathbf{F}\cdot\mathbf{u}_{FC} = (-64\,\mathbf{j}+48\mathbf{k})\cdot(0.7071\mathbf{i}-0.7071\mathbf{j})$$
$$= (0)(0.7071)+(-64)(-0.7071)+48(0)$$
$$= 45.25 = 45.2\,\text{N} \qquad \textbf{Ans.}$$

The component of $\mathbf{F}_{BC}$ can be expressed in Cartesian vector form as

$$\mathbf{F}_{BC} = F_{BC}(\mathbf{u}_{FC}) = 45.25(0.7071\mathbf{i}-0.7071\mathbf{j})$$
$$= \{32\mathbf{i}-32\mathbf{j}\}\,\text{N} \qquad \textbf{Ans.}$$

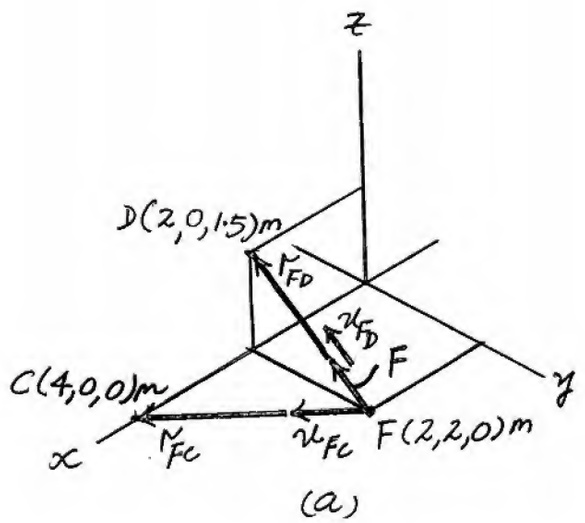

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–119. The clamp is used on a jig. If the vertical force acting on the bolt is $\mathbf{F} = \{-500\mathbf{k}\}$ N, determine the magnitudes of its components $\mathbf{F}_1$ and $\mathbf{F}_2$ which act along the *OA* axis and perpendicular to it.

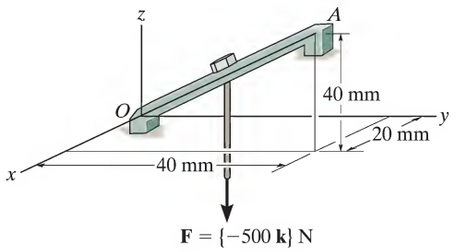

Unit Vector : The unit vector along *OA* axis is

$$\mathbf{u}_{AO} = \frac{(0-20)\mathbf{i} + (0-40)\mathbf{j} + (0-40)\mathbf{k}}{\sqrt{(0-20)^2 + (0-40)^2 + (0-40)^2}} = -\frac{1}{3}\mathbf{i} - \frac{2}{3}\mathbf{j} - \frac{2}{3}\mathbf{k}$$

Projected Component of F Along OA Axis :

$$\begin{aligned} F_1 &= \mathbf{F} \cdot \mathbf{u}_{AO} = (-500\mathbf{k}) \cdot \left(-\frac{1}{3}\mathbf{i} - \frac{2}{3}\mathbf{j} - \frac{2}{3}\mathbf{k}\right) \\ &= (0)\left(-\frac{1}{3}\right) + (0)\left(-\frac{2}{3}\right) + (-500)\left(-\frac{2}{3}\right) \\ &= 333.33 \text{ N} = 333 \text{ N} \end{aligned}$$ **Ans**

Component of F Perpendicular to OA Axis : Since the magnitude of force **F** is $F = 500$ N so that

$$F_2 = \sqrt{F^2 - F_1^2} = \sqrt{500^2 - 333.33^2} = 373 \text{ N}$$ **Ans**

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***2–120.** Determine the magnitude of the projected component of force $\mathbf{F}_{AB}$ acting along the z axis.

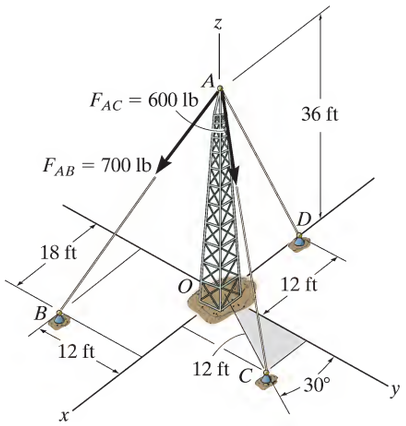

Unit Vector: The unit vector $\mathbf{u}_{AB}$ must be determined first. From Fig. *a*,

$$\mathbf{u}_{AB} = \frac{\mathbf{r}_{AB}}{r_{AB}} = \frac{(18-0)\mathbf{i}+(-12-0)\mathbf{j}+(0-36)\mathbf{k}}{\sqrt{(18-0)^2+(-12-0)^2+(0-36)^2}} = \frac{3}{7}\mathbf{i}-\frac{2}{7}\mathbf{j}-\frac{6}{7}\mathbf{k}$$

Thus, the force vector $\mathbf{F}_{AB}$ is given by

$$\mathbf{F}_{AB} = F_{AB}\,\mathbf{u}_{AB} = 700\left(\frac{3}{7}\mathbf{i}-\frac{2}{7}\mathbf{j}-\frac{6}{7}\mathbf{k}\right) = \{300\mathbf{i}-200\mathbf{j}-600\mathbf{k}\}\ \text{lb}$$

Vector Dot Product: The projected component of $\mathbf{F}_{AB}$ along the z axis is

$$(F_{AB})_z = \mathbf{F}_{AB}\cdot\mathbf{k} = (300\mathbf{i}-200\mathbf{j}-600\mathbf{k})\cdot\mathbf{k}$$
$$= -600\ \text{lb}$$

The negative sign indicates that $(\mathbf{F}_{AB})_z$ is directed towards the negative z axis. Thus

$(F_{AB})_z = 600$ lb **Ans.**

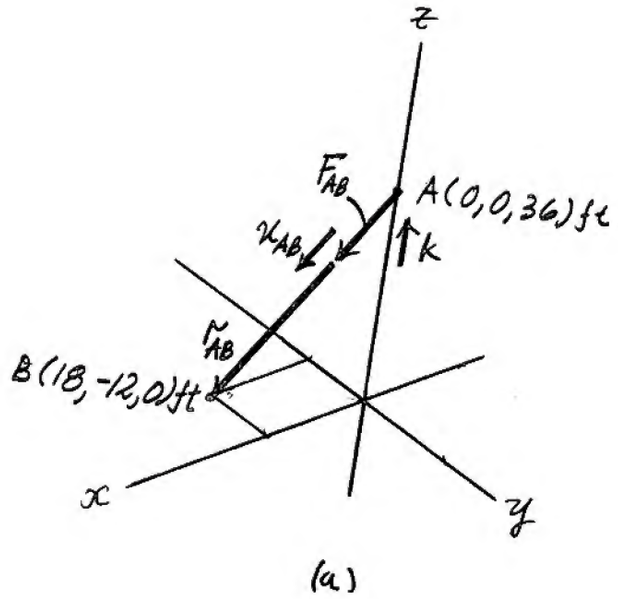

(a)

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–121. Determine the magnitude of the projected component of force $\mathbf{F}_{AC}$ acting along the z axis.

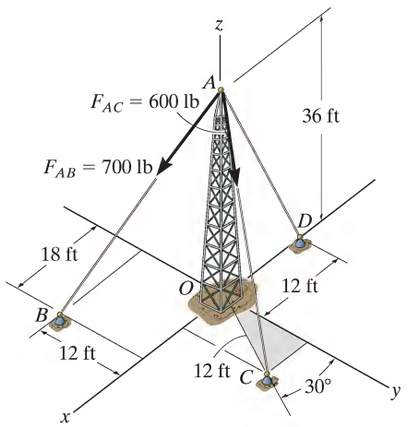

Unit Vector: The unit vector $\mathbf{u}_{AC}$ must be determined first. From Fig. *a*,

$$\mathbf{u}_{AC} = \frac{\mathbf{r}_{AC}}{r_{AC}} = \frac{(12\sin 30° - 0)\mathbf{i} + (12\cos 30° - 0)\mathbf{j} + (0 - 36)\mathbf{k}}{\sqrt{(12\sin 30° - 0)^2 + (12\cos 30° - 0)^2 + (0 - 36)^2}} = 0.1581\mathbf{i} + 0.2739\mathbf{j} - 0.9487\mathbf{k}$$

Thus, the force vector $\mathbf{F}_{AC}$ is given by

$$\mathbf{F}_{AC} = F_{AC}\mathbf{u}_{AC} = 600(0.1581\mathbf{i} + 0.2739\mathbf{j} - 0.9487\mathbf{k}) = \{94.87\mathbf{i} + 164.32\mathbf{j} - 569.21\mathbf{k}\}\text{N}$$

Vector Dot Product: The projected component of $\mathbf{F}_{AC}$ along the z axis is

$$(F_{AC})_z = \mathbf{F}_{AC} \cdot \mathbf{k} = (94.87\mathbf{i} + 164.32\mathbf{j} - 569.21\mathbf{k}) \cdot \mathbf{k}$$
$$= -569 \text{ lb}$$

The negative sign indicates that $(\mathbf{F}_{AC})_z$ is directed towards the negative z axis. Thus

$(F_{AC})_z = 569$ lb **Ans.**

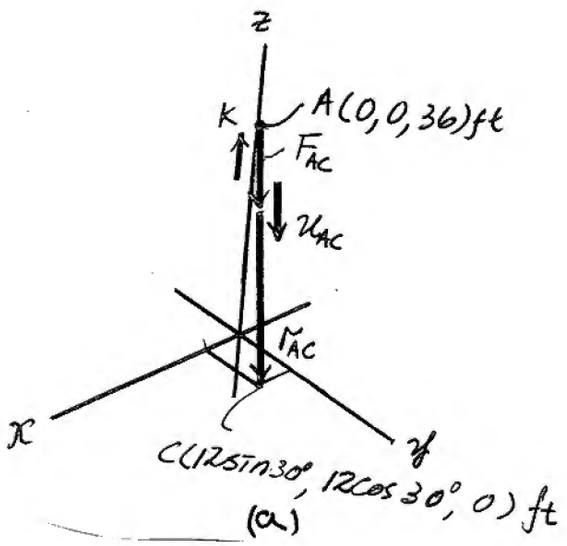

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–122. Determine the projection of force $F = 400$ N acting along line AC of the pipe assembly. Express the result as a Cartesian vector.

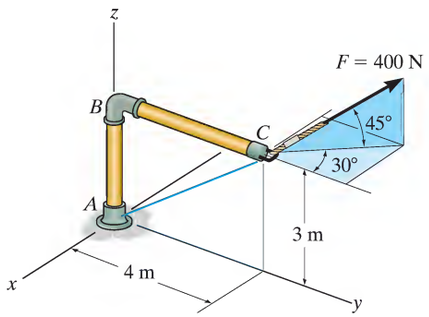

Force and unit Vector: The force vector $\mathbf{F}$ and unit vector $\mathbf{u}_{AC}$ must be determined first.

From Fig. (a)

$$\mathbf{F} = 400(-\cos 45^\circ \sin 30^\circ \mathbf{i} + \cos 45^\circ \cos 30^\circ \mathbf{j} + \sin 45^\circ \mathbf{k})$$
$$= \{-141.42\mathbf{i} + 244.95\mathbf{j} + 282.84\mathbf{k}\}$$
$$\mathbf{u}_{AC} = \frac{\mathbf{r}_{AC}}{r_{AC}} = \frac{(0-0)\mathbf{i} + (4-0)\mathbf{j} + (3-0)\mathbf{k}}{\sqrt{(0-0)^2 + (4-0)^2 + (3-0)^2}} = \frac{4}{5}\mathbf{j} + \frac{3}{5}\mathbf{k}$$

Vector Dot Product: The magnitude of the projected component of $\mathbf{F}$ along line AC is

$$F_{AC} = \mathbf{F} \cdot \mathbf{u}_{AC} = (-141.42\mathbf{i} + 244.95\mathbf{j} + 282.84\mathbf{k}) \cdot \left(\frac{4}{5}\mathbf{j} + \frac{3}{5}\mathbf{k}\right)$$
$$= (-141.42)(0) + 244.95\left(\frac{4}{5}\right) + 282.84\left(\frac{3}{5}\right)$$
$$= 365.66 \text{ lb} \qquad \textbf{Ans.}$$

Thus, $\mathbf{F}_{AC}$ written in Cartesian vector form is

$$\mathbf{F}_{AC} = F_{AC}\mathbf{u}_{AC} = 365.66\left(\frac{4}{5}\mathbf{j} + \frac{3}{5}\mathbf{k}\right) = \{293\mathbf{j} + 219\mathbf{k}\} \text{ lb} \qquad \textbf{Ans.}$$

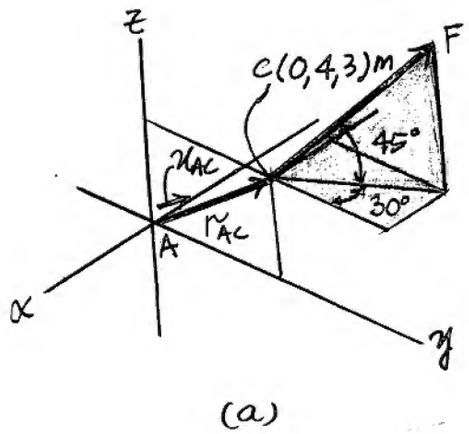

(a)

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–123. Determine the magnitudes of the components of force $F = 400$ N acting parallel and perpendicular to segment BC of the pipe assembly.

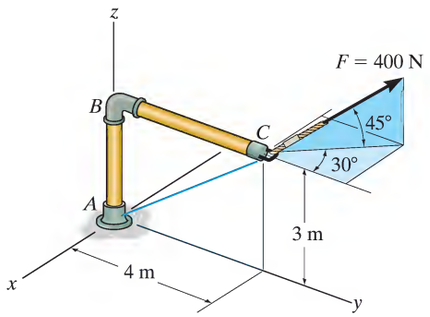

Force Vector: The force vector **F** must be determined first. From Fig. *a*,

$$\mathbf{F} = 400(-\cos 45^\circ \sin 30^\circ \mathbf{i} + \cos 45^\circ \cos 30^\circ \mathbf{j} + \sin 45^\circ \mathbf{k})$$
$$= \{-141.42\mathbf{i} + 244.95\mathbf{j} + 282.84\mathbf{k}\}\ \text{N}$$

Vector Dot Product: By inspecting Fig. (*a*) we notice that $u_{BC} = \mathbf{j}$. Thus, the magnitude of the component of **F** parallel to segment BC of the pipe assembly is

$$(F_{BC})_{paral} = \mathbf{F} \cdot \mathbf{j} = (-141.42\mathbf{i} + 244.95\mathbf{j} + 282.84\mathbf{k}) \cdot \mathbf{j}$$
$$= -141.42(0) + 244.95(1) + 282.84(0)$$
$$= 244.95\ \text{lb} = 245\ \text{N} \qquad \textbf{Ans.}$$

The magnitude of the component of **F** perpendicular to segment BC of the pipe assembly can be determined from

$$(F_{BC})_{per} = \sqrt{F^2 - (F_{BC})_{paral}} = \sqrt{400^2 - 244.95^2} = 316\ \text{N} \qquad \textbf{Ans.}$$

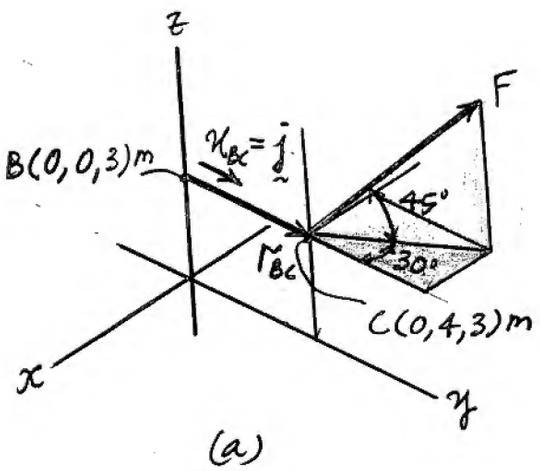

(a)

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

*2–124. Cable OA is used to support column OB. Determine the angle θ it makes with beam OC.

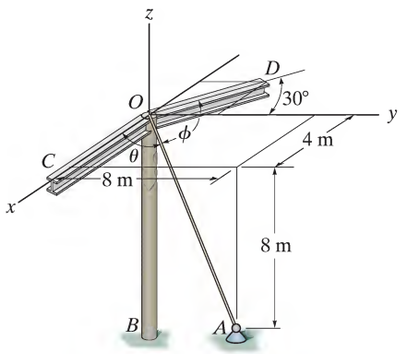

Unit Vector:

$$\mathbf{u}_{OC} = 1\mathbf{i}$$

$$\mathbf{u}_{OA} = \frac{(4-0)\mathbf{i} + (8-0)\mathbf{j} + (-8-0)\mathbf{k}}{\sqrt{(4-0)^2 + (8-0)^2 + (-8-0)^2}} = \frac{1}{3}\mathbf{i} + \frac{2}{3}\mathbf{j} - \frac{2}{3}\mathbf{k}$$

The Angle Between Two Vectors θ:

$$\mathbf{u}_{OC} \cdot \mathbf{u}_{OA} = (1\mathbf{i}) \cdot \left(\frac{1}{3}\mathbf{i} + \frac{2}{3}\mathbf{j} - \frac{2}{3}\mathbf{k}\right) = 1\left(\frac{1}{3}\right) + (0)\left(\frac{2}{3}\right) + 0\left(-\frac{2}{3}\right) = \frac{1}{3}$$

Then,

$$\theta = \cos^{-1}(\mathbf{u}_{OC} \cdot \mathbf{u}_{OA}) = \cos^{-1}\frac{1}{3} = 70.5° \qquad \text{Ans}$$

•2–125. Cable OA is used to support column OB. Determine the angle ϕ it makes with beam OD.

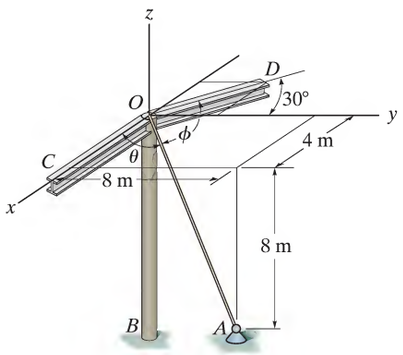

Unit Vector:

$$\mathbf{u}_{OD} = -\sin 30°\mathbf{i} + \cos 30°\mathbf{j} = -0.5\mathbf{i} + 0.8660\mathbf{j}$$

$$\mathbf{u}_{OA} = \frac{(4-0)\mathbf{i} + (8-0)\mathbf{j} + (-8-0)\mathbf{k}}{\sqrt{(4-0)^2 + (8-0)^2 + (-8-0)^2}} = \frac{1}{3}\mathbf{i} + \frac{2}{3}\mathbf{j} - \frac{2}{3}\mathbf{k}$$

The Angles Between Two Vectors ϕ:

$$\mathbf{u}_{OD} \cdot \mathbf{u}_{OA} = (-0.5\mathbf{i} + 0.8660\mathbf{j}) \cdot \left(\frac{1}{3}\mathbf{i} + \frac{2}{3}\mathbf{j} - \frac{2}{3}\mathbf{k}\right)$$
$$= (-0.5)\left(\frac{1}{3}\right) + (0.8660)\left(\frac{2}{3}\right) + 0\left(-\frac{2}{3}\right)$$
$$= 0.4107$$

Then,

$$\phi = \cos^{-1}(\mathbf{u}_{OD} \cdot \mathbf{u}_{OA}) = \cos^{-1} 0.4107 = 65.8° \qquad \text{Ans}$$

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–126. The cables each exert a force of 400 N on the post. Determine the magnitude of the projected component of $\mathbf{F}_1$ along the line of action of $\mathbf{F}_2$.

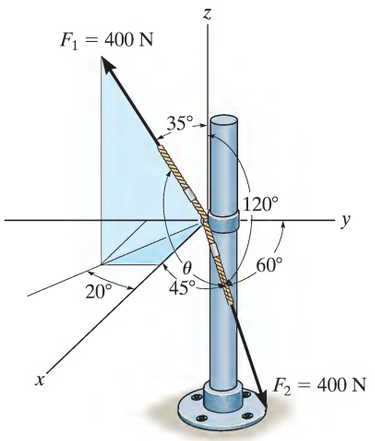

Force Vector :

$$\mathbf{u}_{F_1} = \sin 35°\cos 20°\mathbf{i} - \sin 35°\sin 20°\mathbf{j} + \cos 35°\mathbf{k}$$
$$= 0.5390\mathbf{i} - 0.1962\mathbf{j} + 0.8192\mathbf{k}$$

$$\mathbf{F}_1 = F_1\mathbf{u}_{F_1} = 400(0.5390\mathbf{i} - 0.1962\mathbf{j} + 0.8192\mathbf{k})\ \text{N}$$
$$= \{215.59\mathbf{i} - 78.47\mathbf{j} + 327.66\mathbf{k}\}\ \text{N}$$

Unit Vector : The unit vector along the line of action of $\mathbf{F}_2$ is

$$\mathbf{u}_{F_2} = \cos 45°\mathbf{i} + \cos 60°\mathbf{j} + \cos 120°\mathbf{k}$$
$$= 0.7071\mathbf{i} + 0.5\mathbf{j} - 0.5\mathbf{k}$$

Projected Component of $\mathbf{F}_1$ Along Line of Action of $\mathbf{F}_2$:

$$(F_1)_{F_2} = \mathbf{F}_1 \cdot \mathbf{u}_{F_2} = (215.59\mathbf{i} - 78.47\mathbf{j} + 327.66\mathbf{k}) \cdot (0.7071\mathbf{i} + 0.5\mathbf{j} - 0.5\mathbf{k})$$
$$= (215.59)(0.7071) + (-78.47)(0.5) + (327.66)(-0.5)$$
$$= -50.6\ \text{N}$$

Negative sign indicates that the force component $(\mathbf{F}_1)_{F_2}$ acts in the opposite sense of direction to that of $\mathbf{u}_{F_2}$.

thus the magnitude is $(\mathbf{F}_1)_{F_2} = 50.6\ \text{N}$ **Ans**

2–127. Determine the angle θ between the two cables attached to the post.

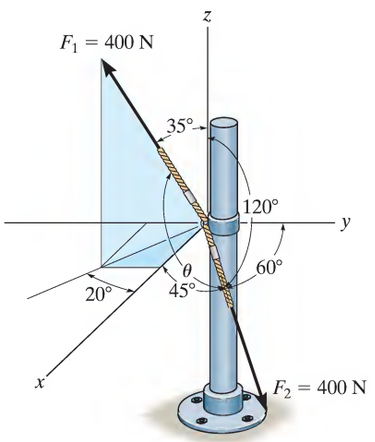

Unit Vector :

$$\mathbf{u}_{F_1} = \sin 35°\cos 20°\mathbf{i} - \sin 35°\sin 20°\mathbf{j} + \cos 35°\mathbf{k}$$
$$= 0.5390\mathbf{i} - 0.1962\mathbf{j} + 0.8192\mathbf{k}$$

$$\mathbf{u}_{F_2} = \cos 45°\mathbf{i} + \cos 60°\mathbf{j} + \cos 120°\mathbf{k}$$
$$= 0.7071\mathbf{i} + 0.5\mathbf{j} - 0.5\mathbf{k}$$

The Angle θ Between Two Vectors : The dot product of two unit vectors must be determined first.

$$\mathbf{u}_{F_1} \cdot \mathbf{u}_{F_2} = (0.5390\mathbf{i} - 0.1962\mathbf{j} + 0.8192\mathbf{k}) \cdot (0.7071\mathbf{i} + 0.5\mathbf{j} - 0.5\mathbf{k})$$
$$= 0.5390(0.7071) + (-0.1962)(0.5) + 0.8192(-0.5)$$
$$= -0.1265$$

Then,

$$\theta = \cos^{-1}\left(\mathbf{u}_{F_1} \cdot \mathbf{u}_{F_2}\right) = \cos^{-1}(-0.1265) = 97.3°$$ **Ans**

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***2–128.** A force of $F = 80$ N is applied to the handle of the wrench. Determine the angle θ between the tail of the force and the handle AB.

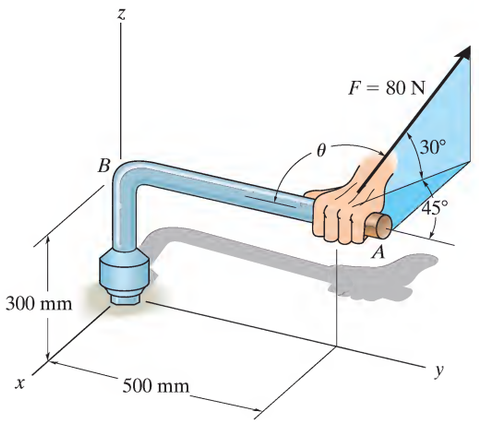

$$\mathbf{u}_F = -\cos 30^\circ \sin 45^\circ \mathbf{i} + \cos 30^\circ \cos 45^\circ \mathbf{j} + \sin 30^\circ \mathbf{k}$$

$$= -0.6124\,\mathbf{i} + 0.6124\,\mathbf{j} + 0.5\,\mathbf{k}$$

$$\mathbf{u}_{AB} = -\mathbf{j}$$

$$\cos\theta = \mathbf{u}_F \cdot \mathbf{u}_{AB} = (-0.6124\,\mathbf{i} + 0.6124\,\mathbf{j} + 0.5\,\mathbf{k}) \cdot (-\mathbf{j})$$

$$= -0.6124$$

$$\theta = 128^\circ \qquad \textbf{Ans}$$

•2–129. Determine the angle θ between cables AB and AC.

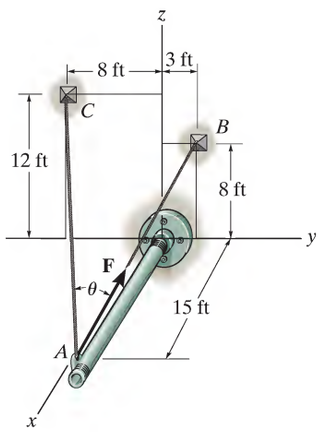

Position Vector :

$$\mathbf{r}_{AB} = \{(0-15)\mathbf{i} + (3-0)\mathbf{j} + (8-0)\mathbf{k}\}\ \text{ft}$$
$$= \{-15\mathbf{i} + 3\mathbf{j} + 8\mathbf{k}\}\ \text{ft}$$

$$\mathbf{r}_{AC} = \{(0-15)\mathbf{i} + (-8-0)\mathbf{j} + (12-0)\mathbf{k}\}\ \text{ft}$$
$$= \{-15\mathbf{i} - 8\mathbf{j} + 12\mathbf{k}\}\ \text{ft}$$

The magnitudes of the postion vectors are

$$r_{AB} = \sqrt{(-15)^2 + 3^2 + 8^2} = 17.263\ \text{ft}$$
$$r_{AC} = \sqrt{(-15)^2 + (-8)^2 + 12^2} = 20.809\ \text{ft}$$

The Angle Between Two Vectors θ :

$$\mathbf{r}_{AB} \cdot \mathbf{r}_{AC} = (-15\mathbf{i} + 3\mathbf{j} + 8\mathbf{k}) \cdot (-15\mathbf{i} - 8\mathbf{j} + 12\mathbf{k})$$
$$= (-15)(-15) + (3)(-8) + 8(12)$$
$$= 297\ \text{ft}^2$$

Then,

$$\theta = \cos^{-1}\left(\frac{\mathbf{r}_{AB} \cdot \mathbf{r}_{AC}}{r_{AB} r_{AC}}\right) = \cos^{-1}\left[\frac{297}{17.263(20.809)}\right] = 34.2^\circ \qquad \textbf{Ans}$$

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–130. If **F** has a magnitude of 55 lb, determine the magnitude of its projected components acting along the x axis and along cable AC.

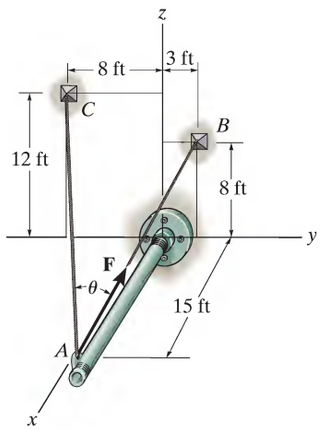

Force Vector :

$$\mathbf{u}_{AB} = \frac{(0-15)\mathbf{i}+(3-0)\mathbf{j}+(8-0)\mathbf{k}}{\sqrt{(0-15)^2+(3-0)^2+(8-0)^2}} = -0.8689\mathbf{i}+0.1738\mathbf{j}+0.4634\mathbf{k}$$

$$\mathbf{F} = F\mathbf{u}_{AB} = 55(-0.8689\mathbf{i}+0.1738\mathbf{j}+0.4634\mathbf{k})\ \text{lb} = \{-47.79\mathbf{i}+9.558\mathbf{j}+25.489\mathbf{k}\}\ \text{lb}$$

Unit Vector : The unit vector along negative x axis and AC are

$$\mathbf{u}_x = -1\mathbf{i}$$

$$\mathbf{u}_{AC} = \frac{(0-15)\mathbf{i}+(-8-0)\mathbf{j}+(12-0)\mathbf{k}}{\sqrt{(0-15)^2+(-8-0)^2+(12-0)^2}} = -0.7209\mathbf{i}-0.3845\mathbf{j}+0.5767\mathbf{k}$$

Projected Component of F :

$$F_x = \mathbf{F}\cdot\mathbf{u}_x = (-47.79\mathbf{i}+9.558\mathbf{j}+25.489\mathbf{k})\cdot(-1\mathbf{i}) = (-47.791)(-1)+9.558(0)+25.489(0) = 47.8\ \text{lb}$$ **Ans**

$$F_{AC} = \mathbf{F}\cdot\mathbf{u}_{AC} = (-47.79\mathbf{i}+9.558\mathbf{j}+25.489\mathbf{k})\cdot(-0.7209\mathbf{i}-0.3845\mathbf{j}+0.5767\mathbf{k}) = (-47.791)(-0.7209)+(9.558)(-0.3845)+(25.489)(0.5767) = 45.5\ \text{lb}$$ **Ans**

2–131. Determine the magnitudes of the projected components of the force $F = 300$ N acting along the x and y axes.

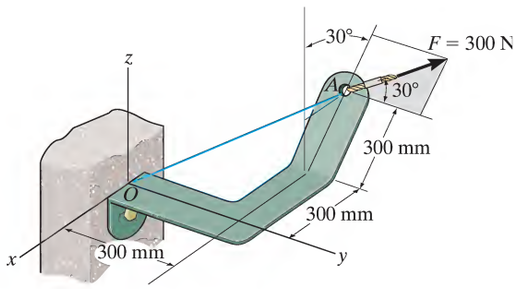

Force Vector: The force vector **F** must be determined first. From Fig. *a*,

$$\mathbf{F} = -300\sin 30°\sin 30°\mathbf{i}+300\cos 30°\mathbf{j}+300\sin 30°\cos 30°\mathbf{k} = [-75\mathbf{i}+259.81\mathbf{j}+129.90\mathbf{k}]\ \text{N}$$

Vector Dot Product: The magnitudes of the projected component of **F** along the x and y axes are

$$F_x = \mathbf{F}\cdot\mathbf{i} = (-75\mathbf{i}+259.81\mathbf{j}+129.90\mathbf{k})\cdot\mathbf{i} = -75(1)+259.81(0)+129.90(0) = -75\ \text{N}$$

$$F_y = \mathbf{F}\cdot\mathbf{j} = (-75\mathbf{i}+259.81\mathbf{j}+129.90\mathbf{k})\cdot\mathbf{j} = -75(0)+259.81(1)+129.90(0) = 260\ \text{N}$$

The negative sign indicates that $\mathbf{F}_x$ is directed towards the negative x axis. Thus

$F_x = 75$ N, $F_y = 260$ N **Ans.**

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***2–132.** Determine the magnitude of the projected component of the force $F = 300$ N acting along line OA.

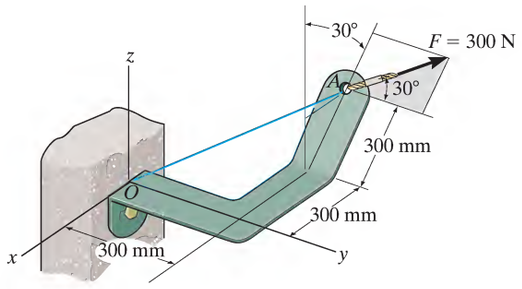

Force and unit Vector: The force vector **F** and unit vector $\mathbf{u}_{OA}$ must be determined first.

From Fig. (*a*)

$$\mathbf{F} = -300\sin 30°\sin 30°\mathbf{i} + 300\cos 30°\mathbf{j} + 300\sin 30°\cos 30°\mathbf{k})$$
$$= \{-75\mathbf{i} + 259.81\mathbf{j} + 129.90\mathbf{k}\}\text{N}$$
$$\mathbf{u}_{OA} = \frac{\mathbf{r}_{OA}}{r_{OA}} = \frac{(-0.45 - 0)\mathbf{i} + (0.3 - 0)\mathbf{j} + (0.2598 - 0)\mathbf{k}}{\sqrt{(-0.45 - 0)^2 + (0.3 - 0)^2 + (0.2598 - 0)^2}} = -0.75\mathbf{i} + 0.5\mathbf{j} + 0.4330\mathbf{k}$$

Vector Dot Product: The magnitude of the projected component of **F** along line *OA* is

$$F_{OA} = \mathbf{F}\cdot\mathbf{u}_{OA} = (-75\mathbf{i} + 259.81\mathbf{j} + 129.90\mathbf{k})\cdot(-0.75\mathbf{i} + 0.5\mathbf{j} + 0.4330\mathbf{k})$$
$$= (-75)(-0.75) + 259.81(0.5) + 129.90(0.4330)$$
$$= 242\text{ N}$$ **Ans.**

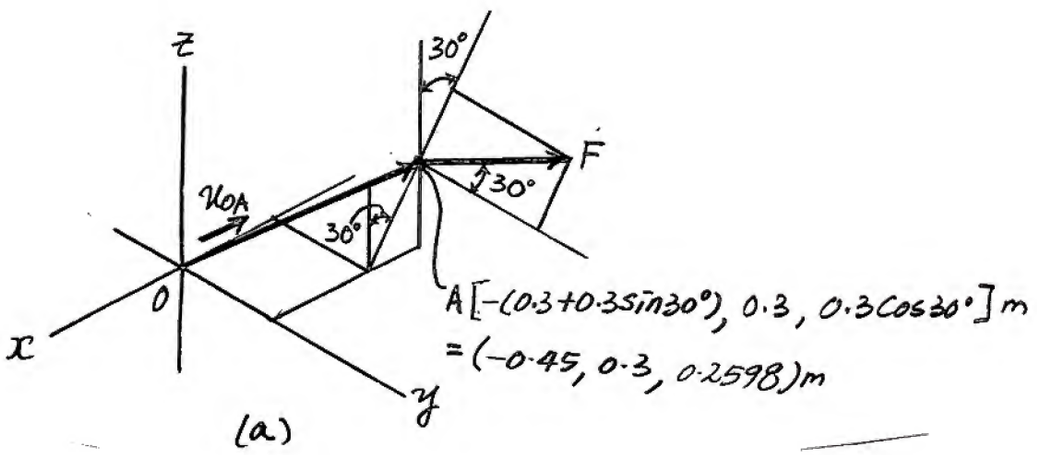

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–133. Two cables exert forces on the pipe. Determine the magnitude of the projected component of $\mathbf{F}_1$ along the line of action of $\mathbf{F}_2$.

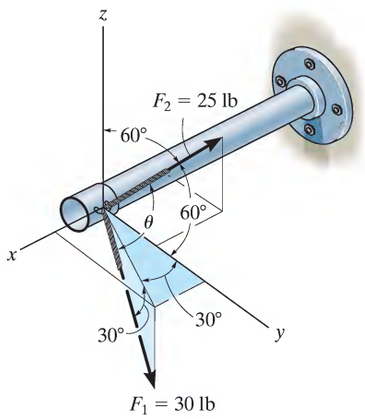

Force Vector :

$$\mathbf{u}_{F_1} = \cos 30°\sin 30°\mathbf{i} + \cos 30°\cos 30°\mathbf{j} - \sin 30°\mathbf{k}$$
$$= 0.4330\mathbf{i} + 0.75\mathbf{j} - 0.5\mathbf{k}$$

$$\mathbf{F}_1 = F_1\mathbf{u}_{F_1} = 30(0.4330\mathbf{i} + 0.75\mathbf{j} - 0.5\mathbf{k})\ \text{lb}$$
$$= \{12.990\mathbf{i} + 22.5\mathbf{j} - 15.0\mathbf{k}\}\ \text{lb}$$

Unit Vector : One can obtain the angle $\alpha = 135°$ for $\mathbf{F}_2$ using Eq. 2–8, $\cos^2\alpha + \cos^2\beta + \cos^2\gamma = 1$, with $\beta = 60°$ and $\gamma = 60°$. The unit vector along the line of action of $\mathbf{F}_2$ is

$$\mathbf{u}_{F_2} = \cos 135°\mathbf{i} + \cos 60°\mathbf{j} + \cos 60°\mathbf{k} = -0.7071\mathbf{i} + 0.5\mathbf{j} + 0.5\mathbf{k}$$

Projected Component of $\mathbf{F}_1$ Along the Line of Action of $\mathbf{F}_2$:

$$(F_1)_{F_2} = \mathbf{F}_1 \cdot \mathbf{u}_{F_2} = (12.990\mathbf{i} + 22.5\mathbf{j} - 15.0\mathbf{k}) \cdot (-0.7071\mathbf{i} + 0.5\mathbf{j} + 0.5\mathbf{k})$$
$$= (12.990)(-0.7071) + (22.5)(0.5) + (-15.0)(0.5)$$
$$= -5.44\ \text{lb}$$

Negative sign indicates that the projected component $(\mathbf{F}_1)_{F_2}$ acts in the opposite sense of direction to that of $\mathbf{u}_{F_2}$.

The magnitude is $(\mathbf{F}_1)_{F_2} = 5.44$ lb. **Ans**

2–134. Determine the angle θ between the two cables attached to the pipe.

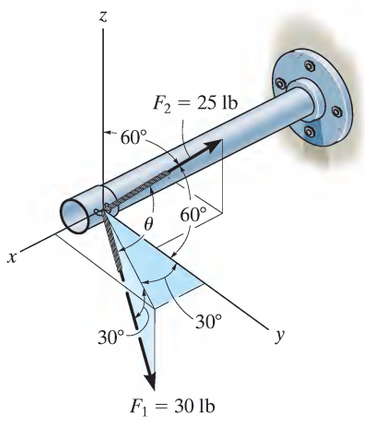

The Angles Between Two Vectors θ :

$$\mathbf{u}_{F_1} \cdot \mathbf{u}_{F_2} = (0.4330\mathbf{i} + 0.75\mathbf{j} - 0.5\mathbf{k}) \cdot (-0.7071\mathbf{i} + 0.5\mathbf{j} + 0.5\mathbf{k})$$
$$= 0.4330(-0.7071) + 0.75(0.5) + (-0.5)(0.5)$$
$$= -0.1812$$

Then,

$$\theta = \cos^{-1}\left(\mathbf{u}_{F_1} \cdot \mathbf{u}_{F_2}\right) = \cos^{-1}(-0.1812) = 100°$$ **Ans**

Unit Vector :

$$\mathbf{u}_{F_1} = \cos 30°\sin 30°\mathbf{i} + \cos 30°\cos 30°\mathbf{j} - \sin 30°\mathbf{k}$$
$$= 0.4330\mathbf{i} + 0.75\mathbf{j} - 0.5\mathbf{k}$$

$$\mathbf{u}_{F_2} = \cos 135°\mathbf{i} + \cos 60°\mathbf{j} + \cos 60°\mathbf{k}$$
$$= -0.7071\mathbf{i} + 0.5\mathbf{j} + 0.5\mathbf{k}$$

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–135. Determine the x and y components of the 700-lb force.

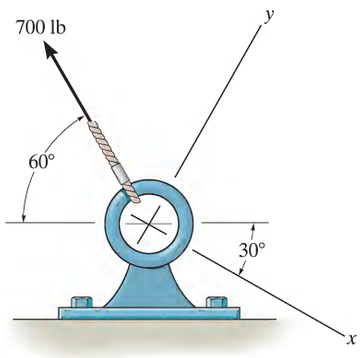

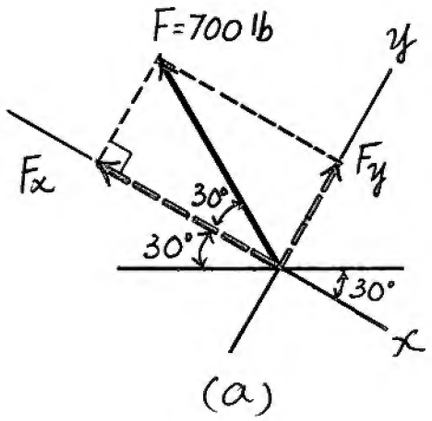

(a)

$F_x = -700 \cos 30° = -606 \text{ lb}$ **Ans**

$F_y = 700 \sin 30° = 350 \text{ lb}$ **Ans**



(b)

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

*2–136. Determine the magnitude of the projected component of the 100-lb force acting along the axis *BC* of the pipe.

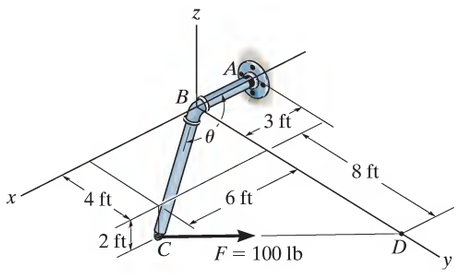

Force Vector :

$$\mathbf{u}_{CD} = \frac{(0-6)\mathbf{i}+(12-4)\mathbf{j}+[0-(-2)]\mathbf{k}}{\sqrt{(0-6)^2+(12-4)^2+[0-(-2)]^2}}$$
$$= -0.5883\mathbf{i}+0.7845\mathbf{j}+0.1961\mathbf{k}$$

$$\mathbf{F} = F\mathbf{u}_{CD} = 100(-0.5883\mathbf{i}+0.7845\mathbf{j}+0.1961\mathbf{k})$$
$$= \{-58.835\mathbf{i}+78.446\mathbf{j}+19.612\mathbf{k}\}\ \text{lb}$$

Unit Vector : The unit vector along *CB* is

$$\mathbf{u}_{CB} = \frac{(0-6)\mathbf{i}+(0-4)\mathbf{j}+[0-(-2)]\mathbf{k}}{\sqrt{(0-6)^2+(0-4)^2+[0-(-2)]^2}}$$
$$= -0.8018\mathbf{i}-0.5345\mathbf{j}+0.2673\mathbf{k}$$

Projected Component of F Along CB :

$$F_{CB} = \mathbf{F}\cdot\mathbf{u}_{CB} = (-58.835\mathbf{i}+78.446\mathbf{j}+19.612\mathbf{k})\cdot(-0.8018\mathbf{i}-0.5345\mathbf{j}+0.2673\mathbf{k})$$
$$= (-58.835)(-0.8018)+(78.446)(-0.5345)+(19.612)(0.2673)$$
$$= 10.5\ \text{lb} \qquad \textbf{Ans}$$

•2–137. Determine the angle θ between pipe segments *BA* and *BC*.

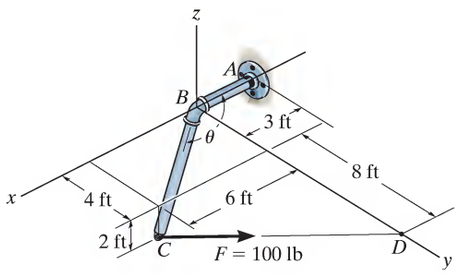

Position Vector :

$$\mathbf{r}_{BA} = \{-3\mathbf{i}\}\ \text{ft}$$

$$\mathbf{r}_{BC} = \{(6-0)\mathbf{i}+(4-0)\mathbf{j}+(-2-0)\mathbf{k}\}\ \text{ft}$$
$$= \{6\mathbf{i}+4\mathbf{j}-2\mathbf{k}\}\ \text{ft}$$

The magnitudes of the position vectors are

$$r_{BA} = 3.00\ \text{ft} \qquad r_{BC} = \sqrt{6^2+4^2+(-2)^2} = 7.483\ \text{ft}$$

The Angle Between Two Vectors θ :

$$\mathbf{r}_{BA}\cdot\mathbf{r}_{BC} = (-3\mathbf{i})\cdot(6\mathbf{i}+4\mathbf{j}-2\mathbf{k})$$
$$= (-3)(6)+(0)(4)+0(-2)$$
$$= -18.0\ \text{ft}^2$$

Then,

$$\theta = \cos^{-1}\left(\frac{\mathbf{r}_{BA}\cdot\mathbf{r}_{BC}}{r_{BA}r_{BC}}\right) = \cos^{-1}\left[\frac{-18.0}{3.00(7.483)}\right] = 143° \qquad \textbf{Ans}$$

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–138. Determine the magnitude and direction of the resultant $\mathbf{F}_R = \mathbf{F}_1 + \mathbf{F}_2 + \mathbf{F}_3$ of the three forces by first finding the resultant $\mathbf{F}' = \mathbf{F}_1 + \mathbf{F}_3$ and then forming $\mathbf{F}_R = \mathbf{F}' + \mathbf{F}_2$. Specify its direction measured counterclockwise from the positive x axis.

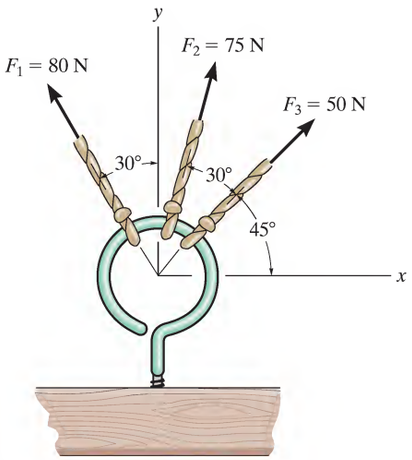

$$F' = \sqrt{(80)^2 + (50)^2 - 2(80)(50)\cos 105°} = 104.7 \text{ N}$$

$$\frac{\sin\phi}{80} = \frac{\sin 105°}{104.7}; \quad \phi = 47.54°$$

$$F_R = \sqrt{(104.7)^2 + (75)^2 - 2(104.7)(75)\cos 162.46°}$$

$$F_R = 177.7 = 178 \text{ N} \quad \text{Ans}$$

$$\frac{\sin\beta}{104.7} = \frac{\sin 162.46°}{177.7}; \quad \beta = 10.23°$$

$$\theta = 75° + 10.23° = 85.2° \quad \text{Ans}$$

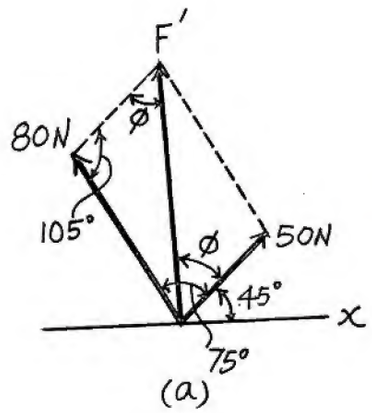

(a)



(b)

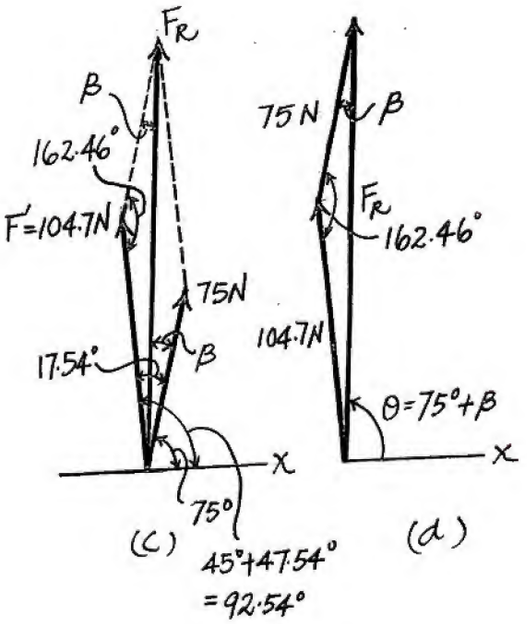

(c) (d)

$45° + 47.54° = 92.54°$

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–139. Determine the design angle θ ($\theta < 90°$) between the two struts so that the 500-lb horizontal force has a component of 600 lb directed from A toward C. What is the component of force acting along member BA?

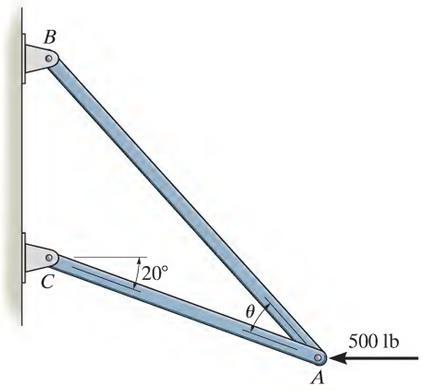

The parallelogram law of addition and the triangular rule are shown in Figs. *a* and *b*.

Applying the law of cosines to Fig. *b*,

$$F_R = \sqrt{500^2 + 600^2 - 2(500)(600)\cos 20°}$$
$$= 214.91 \text{ lb} = 215 \text{ lb} \qquad \textbf{Ans.}$$

Applying the law of sines to Fig. *b* and using this result yields

$$\frac{\sin\theta}{500} = \frac{\sin 20°}{214.91} \qquad \theta = 52.7° \qquad \textbf{Ans.}$$



(a)



(b)

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

***2–140.** Determine the magnitude and direction of the *smallest* force $\mathbf{F}_3$ so that the resultant force of all three forces has a magnitude of 20 lb.

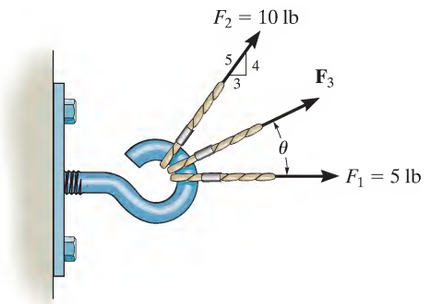



(a)

$\mathbf{F}_3$ is minimum:

$$\mathbf{F}_3 = 20 - |\mathbf{F}_1 + \mathbf{F}_2|$$

$$\mathbf{F}_1 + \mathbf{F}_2 = \left(5 + 10\left(\frac{3}{5}\right)\right)\mathbf{i} + \left(10\left(\frac{4}{5}\right)\right)\mathbf{j} = 11\,\mathbf{i} + 8\,\mathbf{j}$$

$$|\mathbf{F}_1 + \mathbf{F}_2| = \sqrt{11^2 + 8^2} = 13.601 \text{ lb}$$

$$\theta = \tan^{-1}\left(\frac{8}{11}\right) = 36.0^\circ \quad \text{Ans}$$

Thus

$$(F_3)_{min} = 20 - 13.601 = 6.40 \text{ lb} \quad \text{Ans}$$

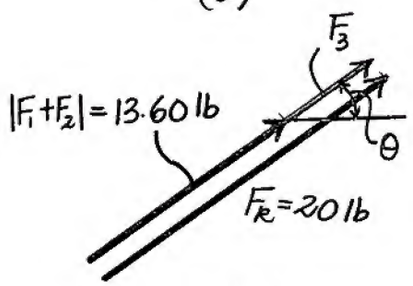

(b)

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

•2–141. Resolve the 250-N force into components acting along the u and v axes and determine the magnitudes of these components.

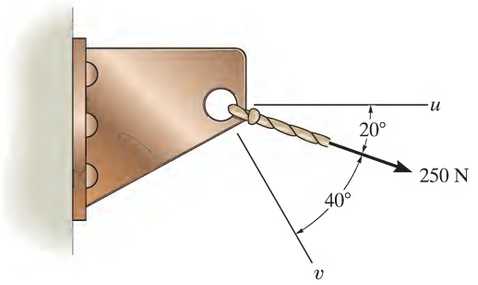

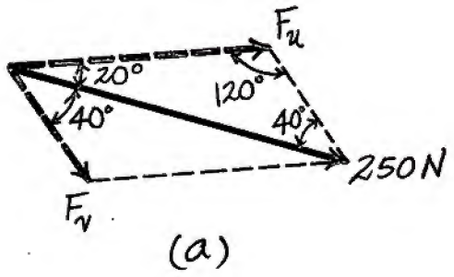

(a)

$$\frac{250}{\sin 120^\circ} = \frac{F_u}{\sin 40^\circ}; \quad F_u = 186\ \text{N} \quad \text{Ans}$$

$$\frac{250}{\sin 120^\circ} = \frac{F_v}{\sin 20^\circ}; \quad F_v = 98.7\ \text{N} \quad \text{Ans}$$

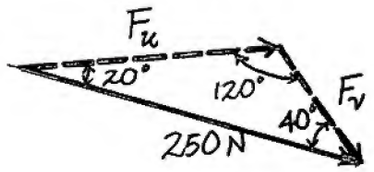

(b)

2–142. Cable AB exerts a force of 80 N on the end of the 3-m-long boom OA. Determine the magnitude of the projection of this force along the boom.

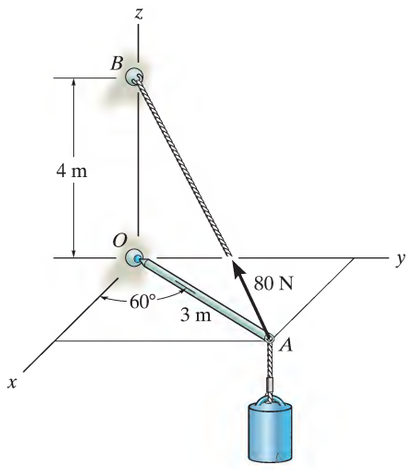

Vector Analysis :

$$\mathbf{F} = 80\left(\frac{\mathbf{r}_{AB}}{r_{AB}}\right) = 80\left(-\frac{3\cos 60^\circ}{5}\mathbf{i} - \frac{3\sin 60^\circ}{5}\mathbf{j} + \frac{4}{5}\mathbf{k}\right)$$

$$= -24\,\mathbf{i} - 41.57\,\mathbf{j} + 64\,\mathbf{k}$$

$$\mathbf{u}_{AO} = -\cos 60^\circ\,\mathbf{i} - \sin 60^\circ\,\mathbf{j} = -0.5\,\mathbf{i} - 0.866\,\mathbf{j}$$

$$\text{Proj}_{AO}\mathbf{F} = \mathbf{F}\cdot\mathbf{u}_{AO} = (-24)(-0.5) + (-41.57)(-0.866) + (64)0 = 48.0\ \text{N} \quad \text{Ans}$$

Scalar Anaysis :

$$\text{Angle } OAB = \tan^{-1}\left(\frac{4}{3}\right) = 53.13^\circ$$

$$\text{Proj } F = 80\cos 53.13^\circ = 48.0\ \text{N} \quad \text{Ans}$$

© 2010 Pearson Education, Inc., Upper Saddle River, NJ. All rights reserved. This material is protected under all copyright laws as they currently exist. No portion of this material may be reproduced, in any form or by any means, without permission in writing from the publisher.

2–143. The three supporting cables exert the forces shown on the sign. Represent each force as a Cartesian vector.

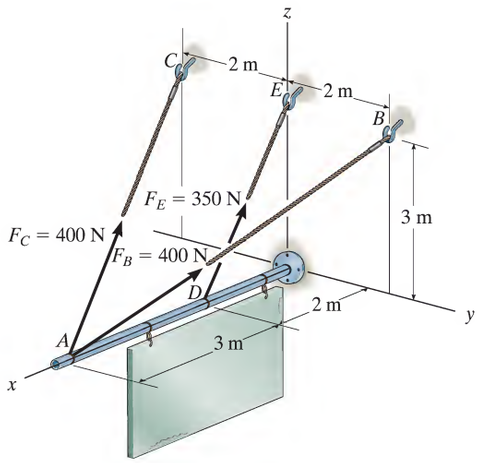

Unit Vector:

$$\mathbf{r}_{AB} = \{(0-5)\mathbf{i} + (2-0)\mathbf{j} + (3-0)\mathbf{k}\}\ \text{m} = \{-5\mathbf{i} + 2\mathbf{j} + 3\mathbf{k}\}\ \text{m}$$

$$r_{AB} = \sqrt{(-5)^2 + 2^2 + 3^2} = 6.164\ \text{m}$$

$$\mathbf{u}_{AB} = \frac{\mathbf{r}_{AB}}{r_{AB}} = \frac{-5\mathbf{i} + 2\mathbf{j} + 3\mathbf{k}}{6.164} = -0.8111\mathbf{i} + 0.3244\mathbf{j} + 0.4867\mathbf{k}$$

$$\mathbf{r}_{AC} = \{(0-5)\mathbf{i} + (-2-0)\mathbf{j} + (3-0)\mathbf{k}\}\ \text{m} = \{-5\mathbf{i} - 2\mathbf{j} + 3\mathbf{k}\}\ \text{m}$$

$$r_{AC} = \sqrt{(-5)^2 + (-2)^2 + 3^2} = 6.164\ \text{m}$$

$$\mathbf{u}_{AC} = \frac{\mathbf{r}_{AC}}{r_{AC}} = \frac{-5\mathbf{i} - 2\mathbf{j} + 3\mathbf{k}}{6.164} = -0.8111\mathbf{i} - 0.3244\mathbf{j} + 0.4867\mathbf{k}$$

$$\mathbf{r}_{DE} = \{(0-2)\mathbf{i} + (0-0)\mathbf{j} + (3-0)\mathbf{k}\}\ \text{m} = \{-2\mathbf{i} + 3\mathbf{k}\}\ \text{m}$$

$$r_{DE} = \sqrt{(-2)^2 + 3^2} = 3.605\ \text{m}$$

$$\mathbf{u}_{DE} = \frac{\mathbf{r}_{DE}}{r_{DE}} = \frac{-2\mathbf{i} + 3\mathbf{k}}{3.605} = -0.5547\mathbf{i} + 0.8321\mathbf{k}$$

Force Vector:

$$\mathbf{F}_B = F_B\mathbf{u}_{AB} = 400\{-0.8111\mathbf{i} + 0.3244\mathbf{j} + 0.4867\mathbf{k}\}\ \text{N}$$
$$= \{-324.44\mathbf{i} + 129.78\mathbf{j} + 194.67\mathbf{k}\}\ \text{N}$$
$$= \{-324\mathbf{i} + 130\mathbf{j} + 195\mathbf{k}\}\ \text{N} \qquad \textbf{Ans}$$

$$\mathbf{F}_C = F_C\mathbf{u}_{AB} = 400\{-0.8111\mathbf{i} - 0.3244\mathbf{j} + 0.4867\mathbf{k}\}\ \text{N}$$
$$= \{-324.44\mathbf{i} - 129.78\mathbf{j} + 194.67\mathbf{k}\}\ \text{N}$$
$$= \{-324\mathbf{i} - 130\mathbf{j} + 195\mathbf{k}\}\ \text{N} \qquad \textbf{Ans}$$

$$\mathbf{F}_E = F_E\mathbf{u}_{DE} = 350\{-0.5547\mathbf{i} + 0.8321\mathbf{k}\}\ \text{N}$$
$$= \{-194.15\mathbf{i} + 291.22\mathbf{k}\}\ \text{N}$$
$$= \{-194\mathbf{i} + 291\mathbf{k}\}\ \text{N} \qquad \textbf{Ans}$$